





Flush mount your heater in four simple steps


STEP 1 Frame the pocket that will house the heater with a one hour-rated fire containment box.

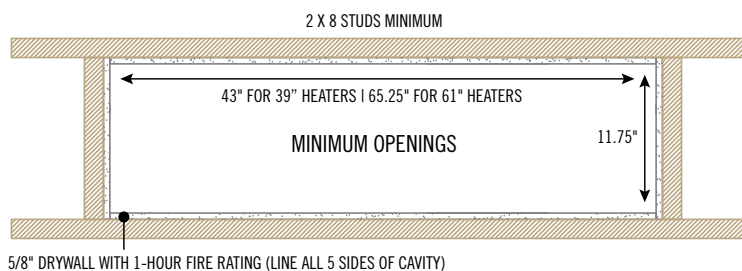


STEP 2 Mount the junction box outside of the pocket. You can choose to mount the junction box in a variety of locations, depending upon where you'll be accessing it.

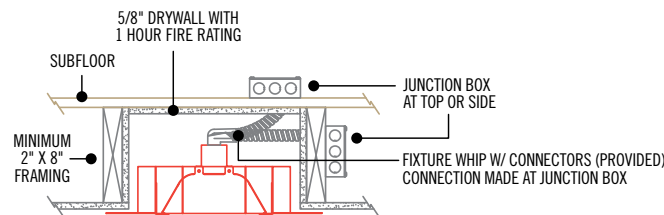

STEP 3 Install the frame into the finished pocket. You may choose to leave all four inches of the trim exposed, or partially cover it (ventilation holes exposed) with a decorative ceiling.

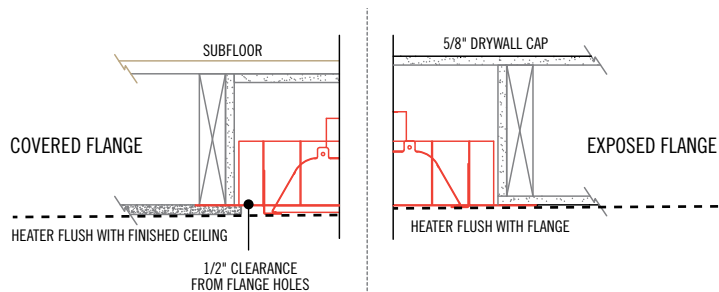

STEP 4 Install the heater and adjust the tabs to set the heater height appropriately.

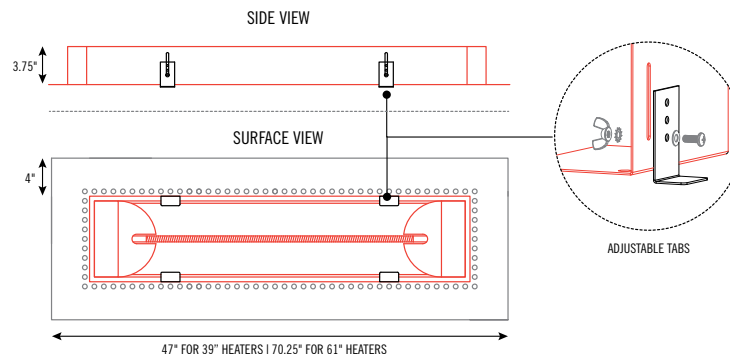

FOR VIDEO INSTRUCTIONS,
VISIT [INFRATECH-USA.COM/
FLUSH-MOUNT](https://www.infratech-usa.com/flush-mount) OR SCAN

