


MINIMUM 65.25 2 X 8 STUDS 11.75 MINIMUM MINIMUM 5/8" DRYWALL 1 HOUR FIRE RATING OPENING OPENING LINE ENTIRE CAVITY (5 SIDES) FIXTURE WHIP w/ CONNECTORS CONNECTION MADE AT JUNCTION BOX 5/8" DRYWALL 1 HOUR FIRE RATING SUBFLOOR JUNCTION BOX ON TOP OR SIDE MIN. 2 x 8 -ADJUSTABLE TABS 4.00 SURFACE VIEW -70.25-

INSTALLATION TYPES

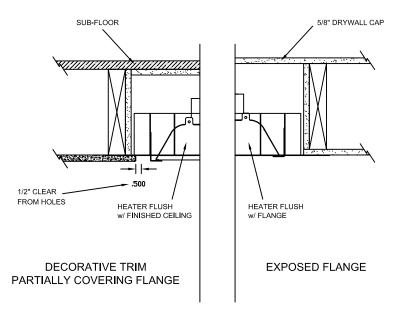



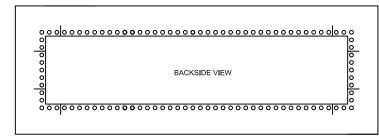

WARNINGS:

- This frame is ONLY to be used on a flat non-sloped celling.
- Heater must face straight down.
- Frame and Heater cannot be Installed on a pitched angle.

NOTES:

- Heater suspends (Gravity) by resting on adjustable tabs in flush mount fixture.
- Mounting holes on Surface Flange to be determined and drilled by Contractor/Installer.
- Supplied with Hi-Temp Fixture Whip and Hi-Temp Wire Nuts.
- Coil excess flex into heater cavity.
- Use Licensed Electrician ONLY



15700 S. Figueroa St. Gardena, California 90248 Phone: (310) 354-1250 Fax: (310) 523-3674

ITEM #: X-18-2305 304 S.S. #4 FINISH

DESCRIPTION: W-61 FLUSH MOUNT PLASTER FRAME (FOR USE WITH 611/4" HEATERS)

MATERIAL:

NOTES:

SUPPLIED w/ ELECTRICAL FIXTURE WHIP

DATE: | SCALE: | DRAWN BY: | July 17, 2015 | N/A | MD