


BILTMOR DECK 5005

Contents of the Biltmor box SKU # 5005


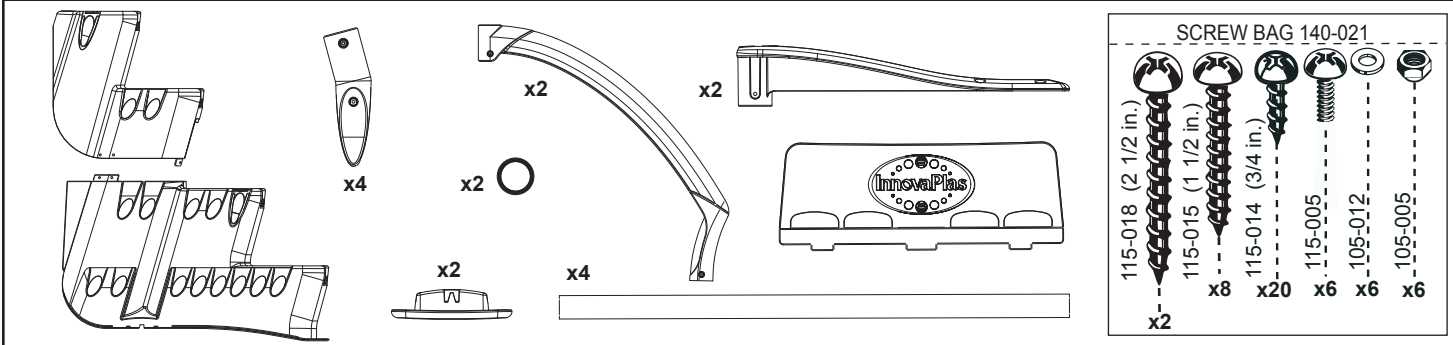


WARNING

- ◆ Do not dive or jump from step or ladder.
- ◆ Use BATTERY operated tools to avoid electric shocks.
- ◆ Install step on flat surface, following the manufacturers instructions.
- ◆ Remove step from pool during freezing climate season.
- ◆ Manufacturer cannot be held responsible for injuries caused by abusive use of product.
- ◆ Ask your city about specific regulations that apply to your above-ground pool and ladder.



Tools required

(not included)

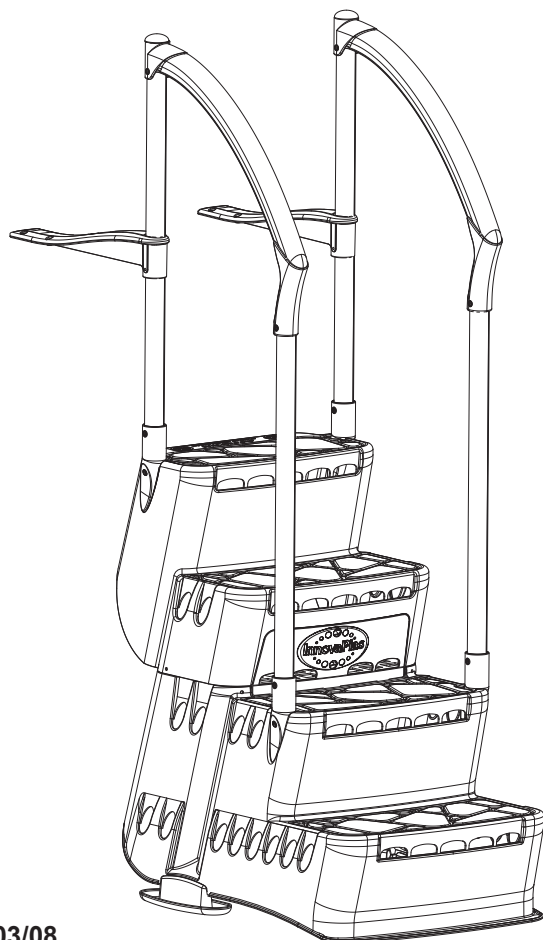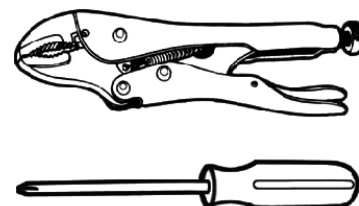

A


- 1) Assemble the two main modules with the six screws, nuts and washers provided.
- 2) Snap the door between the top and bottom module within the slots provided.

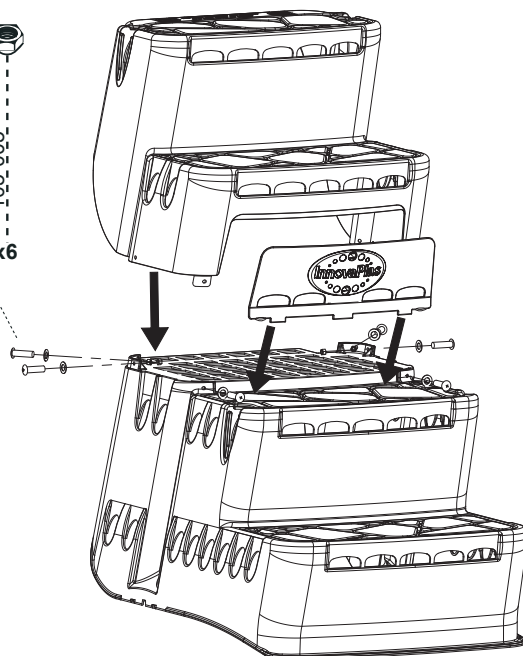

B

1) Snap the four post ends into the step, making sure that the cylindrical part is vertical and that the ends are snapped properly in their respective housings.

2) Snap the 2 feet to the bottom of the step.

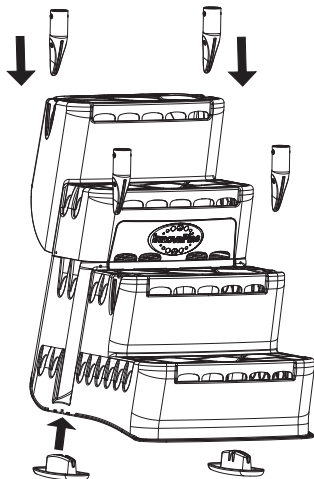


C

1) Insert the four posts into the post ends and secure them in place with the screws provided.

2) Insert the two deck supports over the rear posts.

3) Insert the handrails on the four posts and secure in place.


4) Install the small post covers.

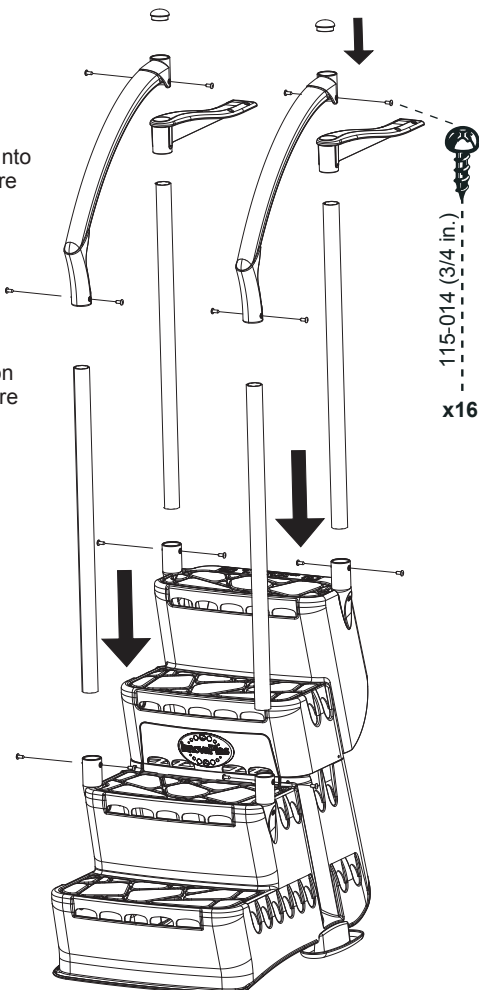

D


1) Slowly submerge the step into the pool. Make sure you do not damage the pool liner in the process.

2) Angle the whole step so that it is entirely under water. This will purge all the air from under the steps.

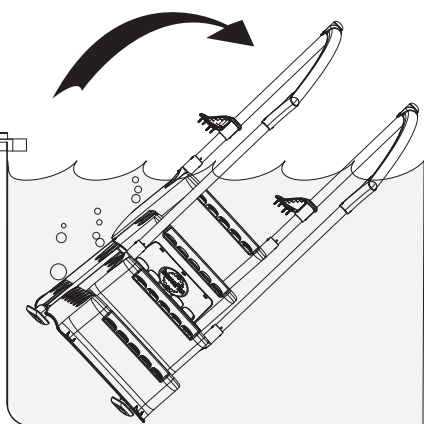

E


1) Affix the deck supports with the screws supplied.

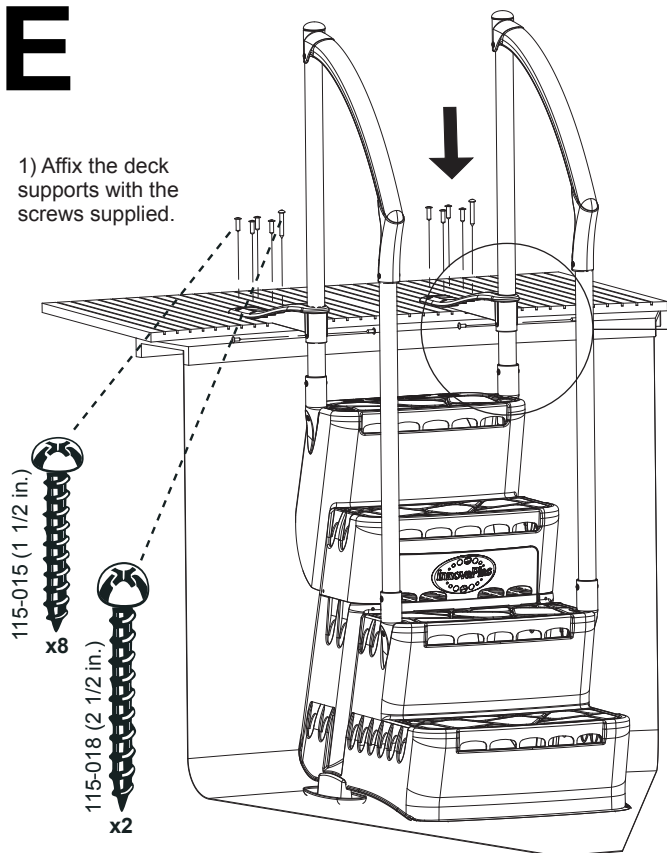

F

1) Pull the deck supports (already fixed to the deck) upwards to create a spring effect on the step.

2) Fasten the supports to the two rear posts while pushing the entire step downwards.

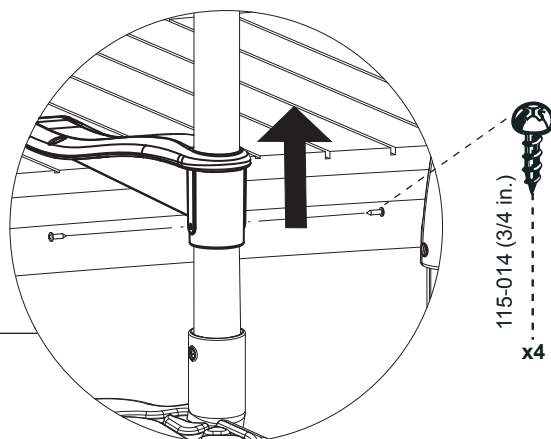

InnovaPlas

Products

101, P.M.E. Street
Sherbrooke (Québec),
Canada J1C 0R2

REV. 06/03/08
PN : 110-006




**MANUFACTURER
WARRANTY**


**2 years on the
Biltmor.
1 year on the hardware.**

BILTMOR 5001 WITH DECK KIT 9005

Contents of the Biltmor box SKU # 5001

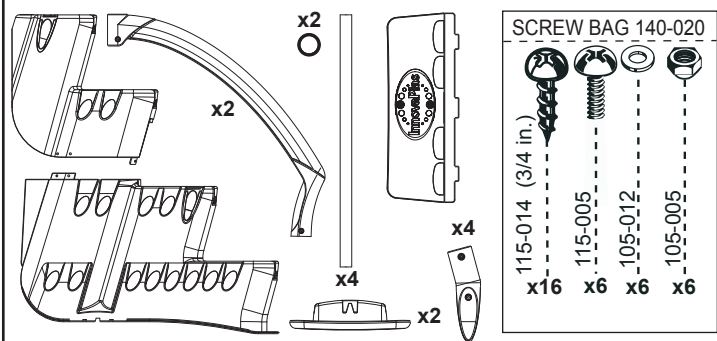

Contents of Deck SKU # 9005

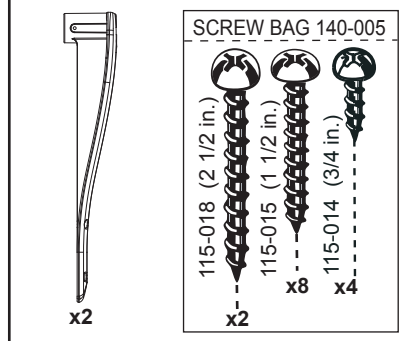

Sand (not included)





⚠ WARNING

- ◆ Do not dive or jump from step or ladder.
- ◆ Use BATTERY operated tools to avoid electric shocks.
- ◆ Install step on flat surface, following the manufacturers instructions.
- ◆ Remove step from pool during freezing climate season.
- ◆ Manufacturer cannot be held responsible for injuries caused by abusive use of product.
- ◆ Ask your city about specific regulations that apply to your above-ground pool and ladder.



Tools required

(not included)

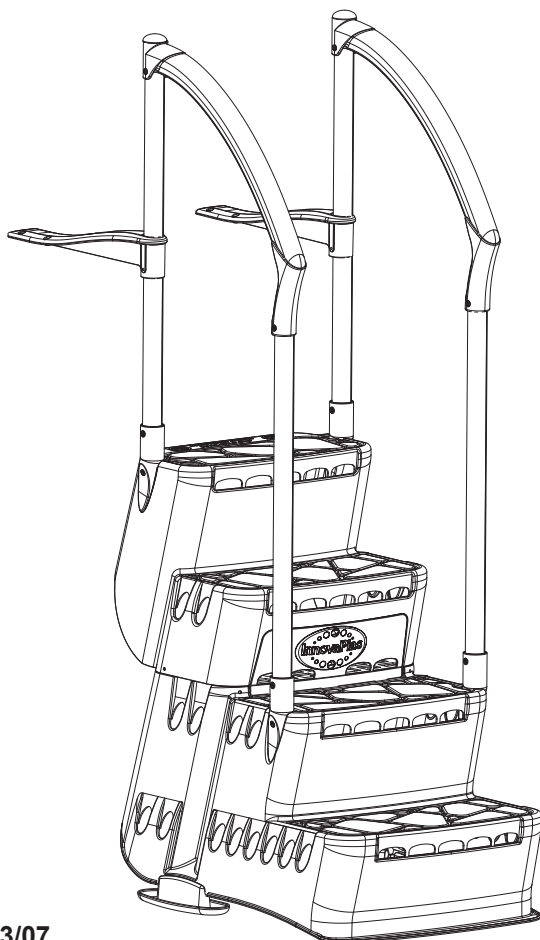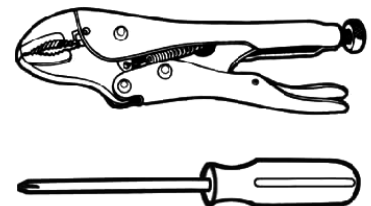

A


- 1) Assemble the two main modules with the six screws, nuts and washers provided.
- 2) Snap the door between the top and bottom module within the slots provided.

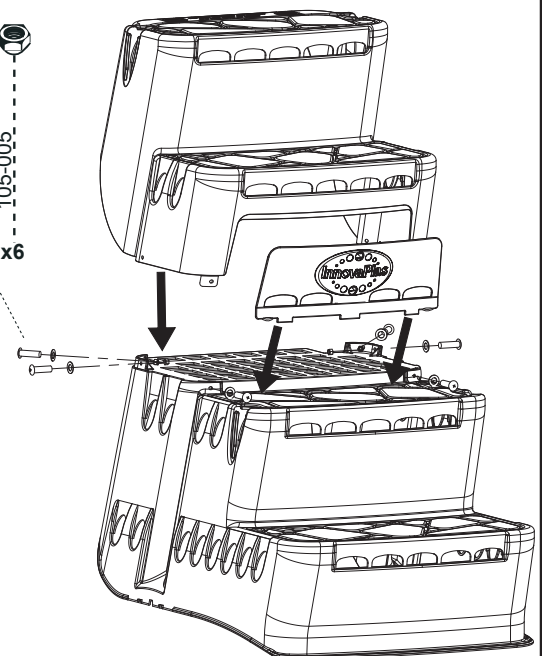

B

1) Snap the four post ends into the step making sure that the cylindrical part is vertical and that the ends are snapped properly in their respective housings.

2) Snap the 2 feet to the bottom of the step.

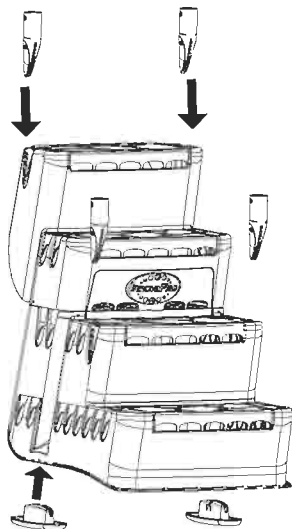


C

1) Insert the four posts into the post ends and secure them in place with the screws provided.

2) Insert the two deck supports over the rear posts.


3) Insert the handrails on the four posts and secure in place.

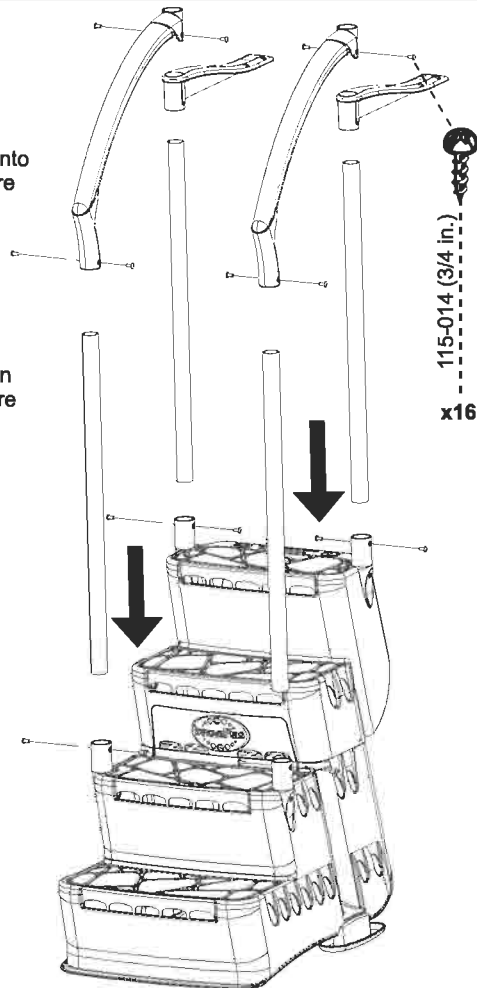

D

1) Place the sandbag in the step.


2) Install the small post covers.

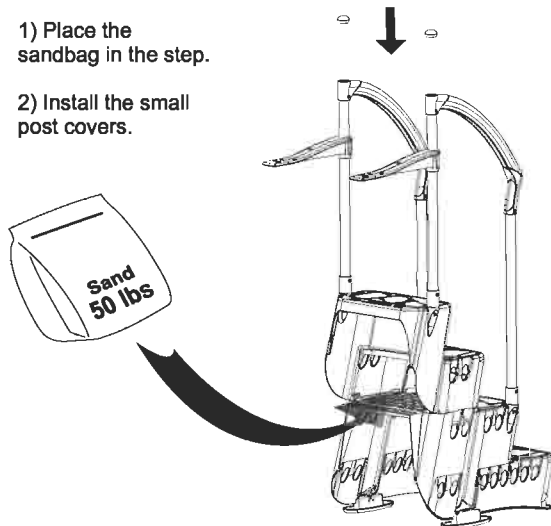

F


1) Affix the deck supports with the screws supplied.

2) Fasten the supports to the two rear post.

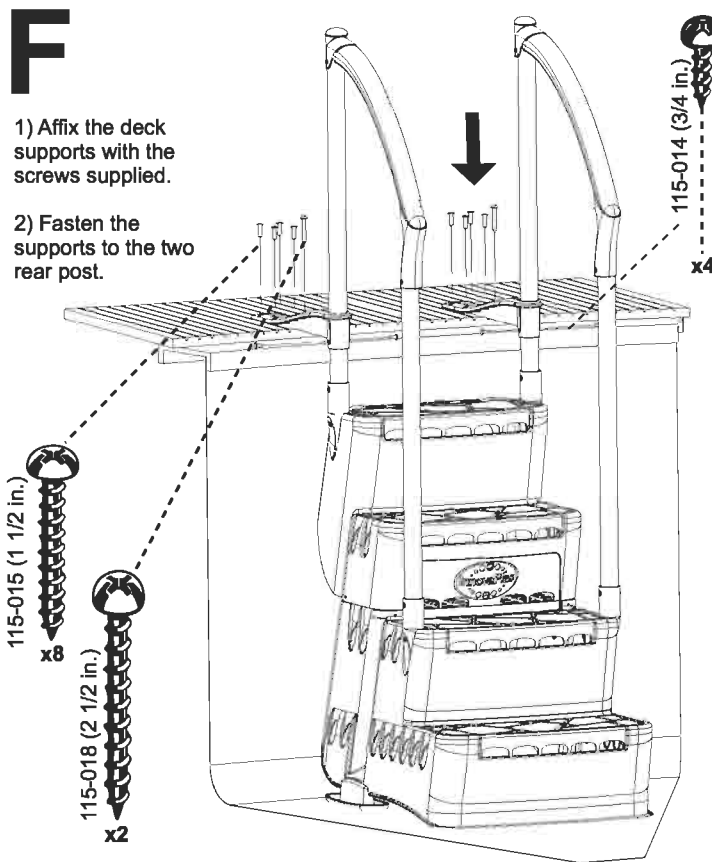

E

1) Slowly submerge the Step into pool. Make sure you do not damage the pool liner in the process.

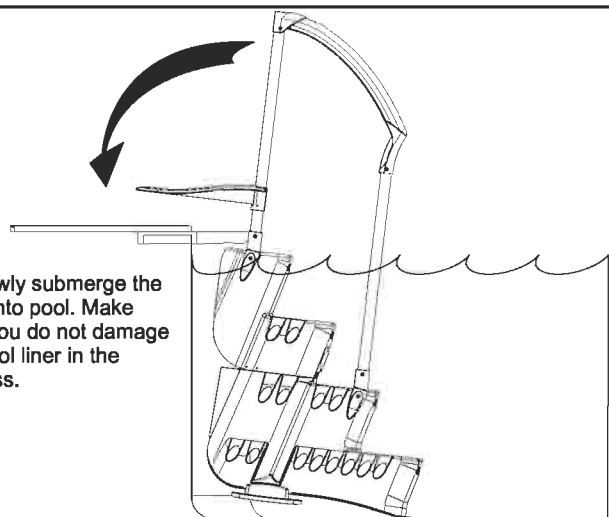

InnovaPlas
Products

101, P.M.E. Street
Sherbrooke (Québec),
Canada J1C 0R2

REV. 28/03/07
PN : 110-090




**MANUFACTURER
WARRANTY**


2 years on the
Biltmor and Deck Kit.
1 year on the hardware.

BILTMOR 5001 WITH CLASSIC LADDER 6002

Contents of the ladder box SKU # 6002

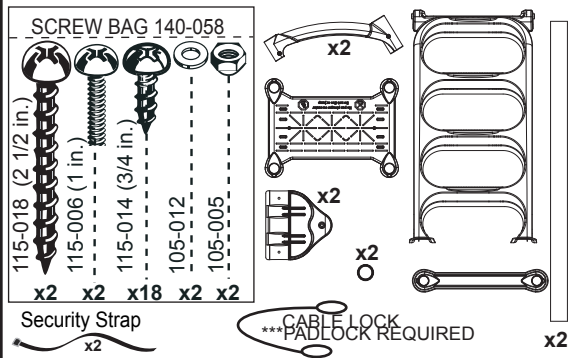

Contents of the Biltmor box SKU # 5001

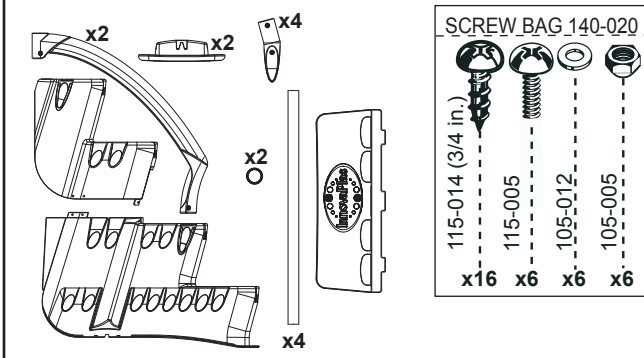

Sand (not included)





⚠ WARNING

- ◆ Do not dive or jump from step or ladder.
- ◆ Use BATTERY operated tools to avoid electric shocks.
- ◆ Install step on flat surface, following the manufacturers instructions.
- ◆ Remove step from pool during freezing climate season.
- ◆ Manufacturer cannot be held responsible for injuries caused by abusive use of product.
- ◆ Ask your city about specific regulations that apply to your above-ground pool and ladder.

Required tools and supplies (not included)


A weather resistant padlock is recommended.

Maximum functional width is 1/4 inch.



A


- 1) Assemble the two main modules with the six screws, nuts and washers provided.
- 2) Snap the door between the top and bottom modules within the slots provided.

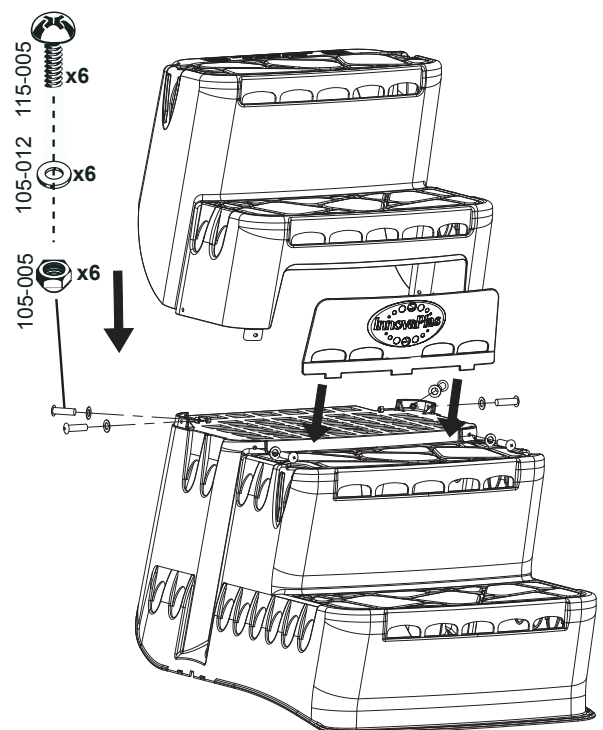

B

1) Snap the four post ends into the step making sure that the cylindrical part is vertical and that the ends are placed and fitted properly in their respective housings.

2) Snap the 2 feet to the bottom of the step.

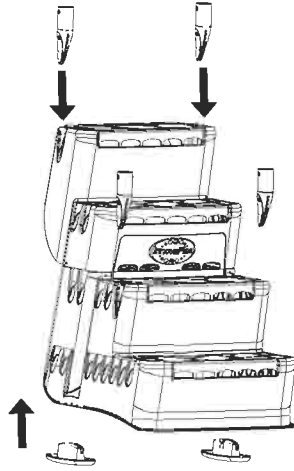


C

1) Insert the four posts into the post ends and secure them in place with the screws provided.

2) Insert the platform over the 2 rear posts.


3) Insert the small and large handrails as illustrated. Secure the large handrails with the screws provided. Leave the small handrails floating.

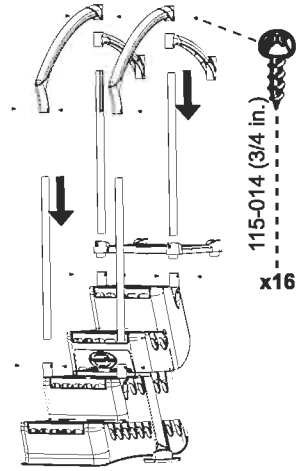

D

1) Install the four post covers.

2) Insert a bag of sand onto surface provided at the rear of the step.

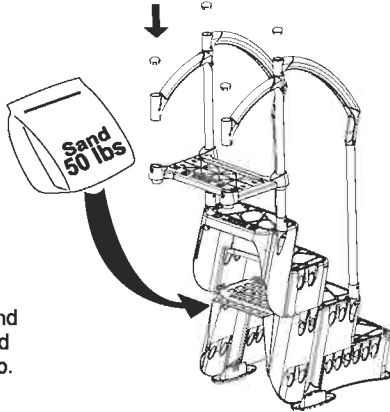


E

1) Slowly submerge the Step in the pool. Make sure you do not damage the liner in the process.

2) Once the step is in the pool secure the platform to the top seat (see illustration) using the two straps provided.

OPTIONAL:
Once the pool step has been completely assembled and secured to the pool, attach the 2 screws supplied through the platform to the top seat of your pool to provided a more rigid assembly.

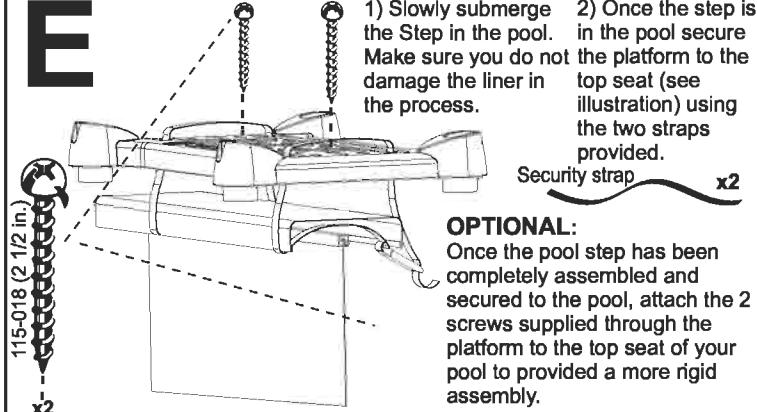

F


1) Trace a line on each post at 39 inches from the ground for 48" & 52" Pools. If you have a 54" pool trace a line at 40.5" from the ground.

2) Slide the pivot blocks onto the posts and line up with the traced marks. Secure with the screws provided.

3) Slide the 2 posts through the platform and handrails.


4) Secure the handrails and platform to the posts with the screws provided.

5) Secure the ladder base to the post with the screws provided.

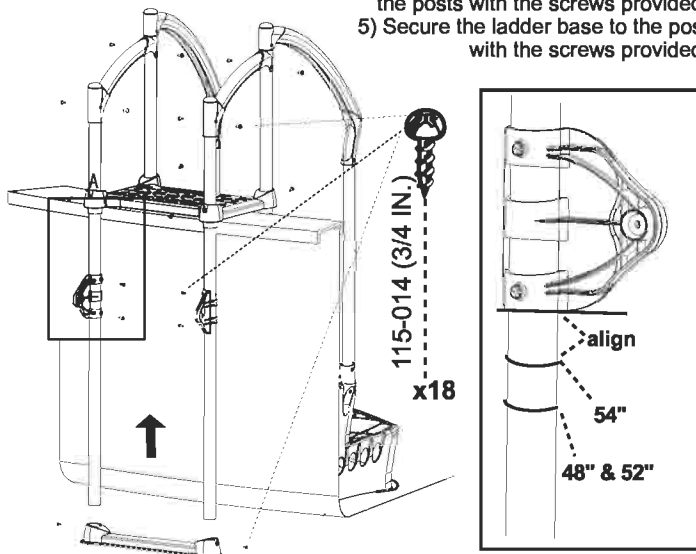


G

2) Secure the ladder to the pivot blocks using the bolts, washers and nuts provided.

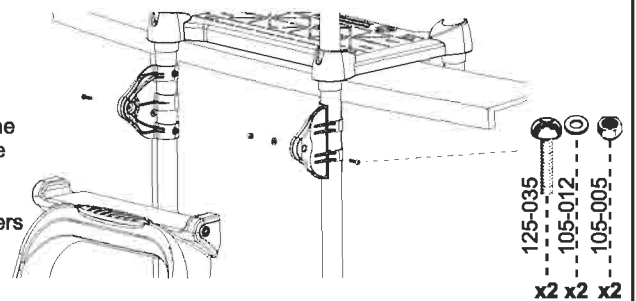

H

CABLE LOCK
***PADLOCK REQUIRED

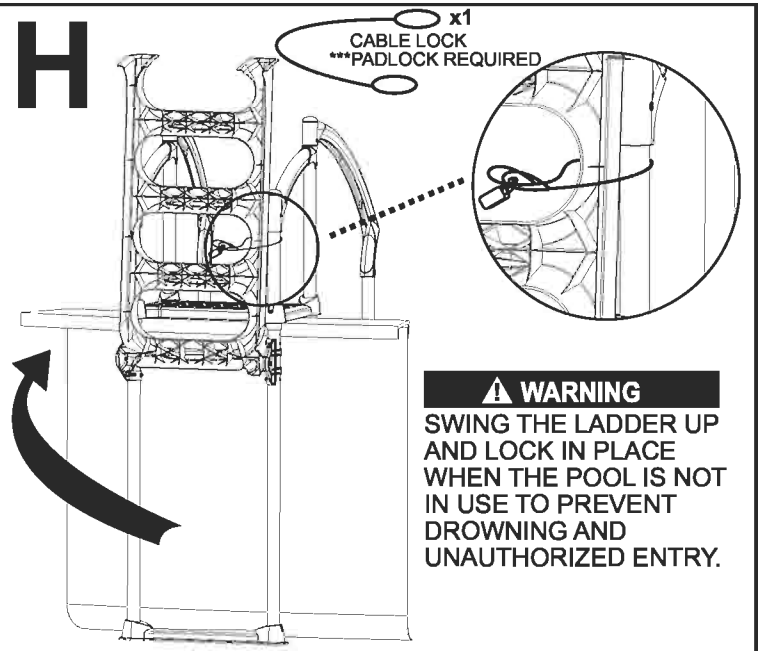

⚠ WARNING
SWING THE LADDER UP AND LOCK IN PLACE WHEN THE POOL IS NOT IN USE TO PREVENT DROWNING AND UNAUTHORIZED ENTRY.

InnovaPlas
Products

101, P.M.E. Street
Sherbrooke (Québec),
Canada J1C 0R2

REV. 28/03/07
PN : 110-097




**MANUFACTURER
WARRANTY**


2 Years on the Classic
ladder and Biltmor.
1 year on the hardware.

BILTMOR 5001 WITH CLASSIC LADDER 6001

Contents of the ladder box SKU # 6001

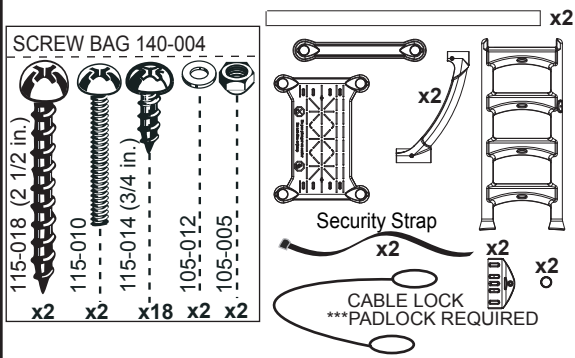

Contents of the Biltmor box SKU # 5001

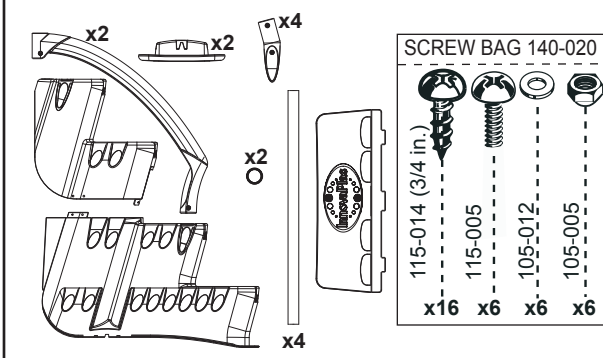

Sand (not included)







⚠ WARNING

- ◆ Do not dive or jump from step or ladder.
- ◆ Use BATTERY operated tools to avoid electric shocks.
- ◆ Install step on flat surface, following the manufacturers instructions.
- ◆ Remove step from pool during freezing climate season.
- ◆ Manufacturer cannot be held responsible for injuries caused by abusive use of product.
- ◆ Ask your city about specific regulations that apply to your above-ground pool and ladder.

Required tools and supplies (not included)


A weather resistant padlock is recommended.

Maximum functional width is 1/4 inch.

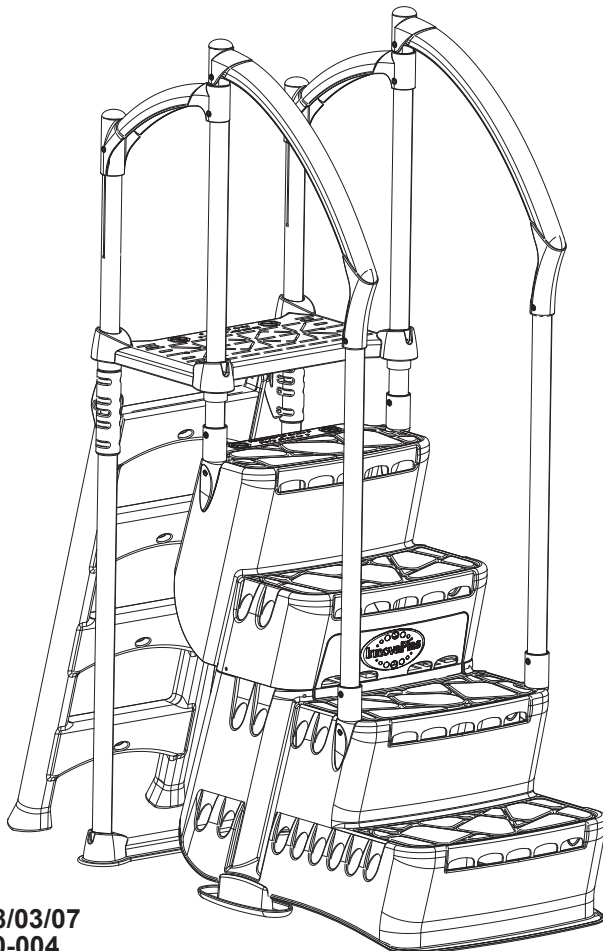

A


- 1) Assemble the two main modules with the six screws, nuts and washers provided.
- 2) Snap the door between the top and bottom modules within the slots provided.

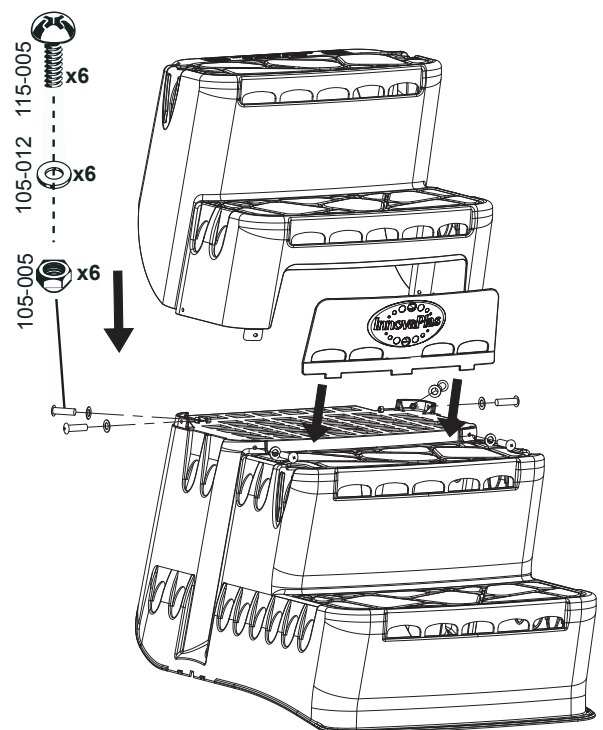

B

1) Snap the four post ends into the step making sure that the cylindrical part is vertical and that the ends are placed and fitted properly in their respective housings.

2) Snap the 2 feet to the bottom of the step.

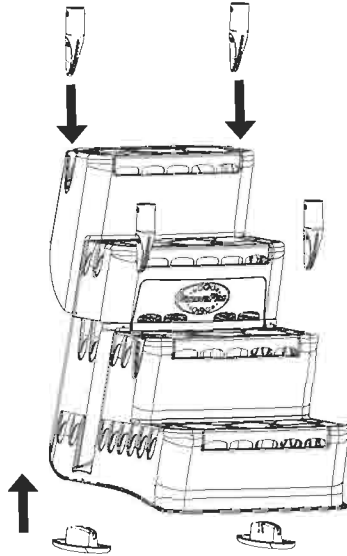


C

1) Insert the four posts into the post ends and secure them in place with the screws provided.

2) Insert the platform over the 2 rear posts.


3) Insert the small and large handrails as illustrated. Secure the large handrails with the screws provided. Place the small handrails at the base of the large and secure them in place with the screws provided.

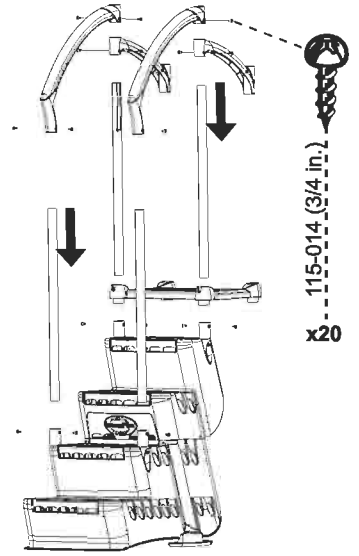

D

1) Install the four post covers.

2) Insert a bag of sand onto surface provided at the rear of the step.

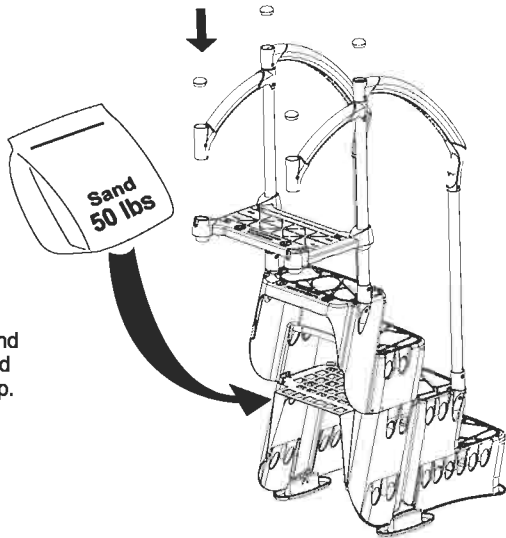

E


1) Slowly submerge the Step in the pool. Make sure you do not damage the liner in the process.

2) Once the step is in the pool secure the platform to the top seat (see illustration) using the two straps provided.

Security strap x2

OPTIONAL:

Once the pool step has been completely assembled and secured to the pool, attach the 2 screws supplied through the platform to the top seat of your pool to provided a more rigid assembly.

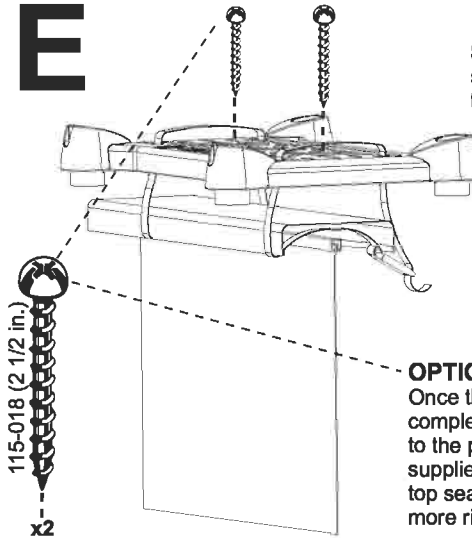


F


1) Assemble the two posts through the platform and small handrails. Slide the pivot blocks onto the posts and secure at 40 1/4 inches from the bottom of the posts with screws provided.

2) Attach the ladder to the pivot blocks with the bolts, washers and nuts provided.

3) Finish the assembly by securing the platform and ladder base to the posts with the screws provided.

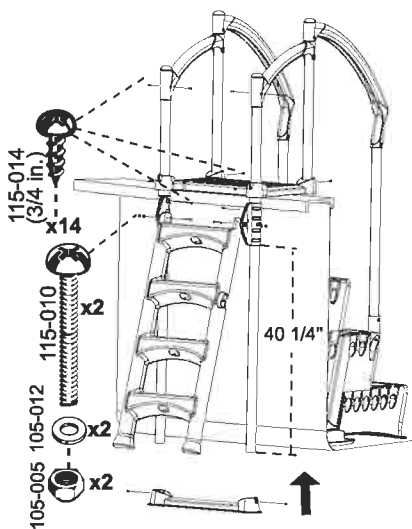

G

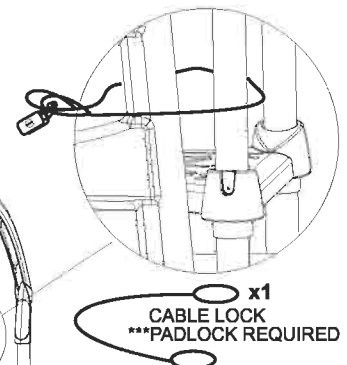

⚠ WARNING

SWING THE LADDER UP AND LOCK IN PLACE WHEN THE POOL IS NOT IN USE TO PREVENT DROWNING AND UNAUTHORIZED ENTRY.

InnovaPlas

Products

101, P.M.E. Street
Sherbrooke (Québec),
Canada J1C 0R2

REV. 28/03/07
PN : 110-004




MANUFACTURER WARRANTY


2 Years on the Classic
ladder and Biltmor.
1 year on the hardware.

BILTMOR 5015 WITH CLASSIC 6001


Contents of the ladder box SKU # 6001

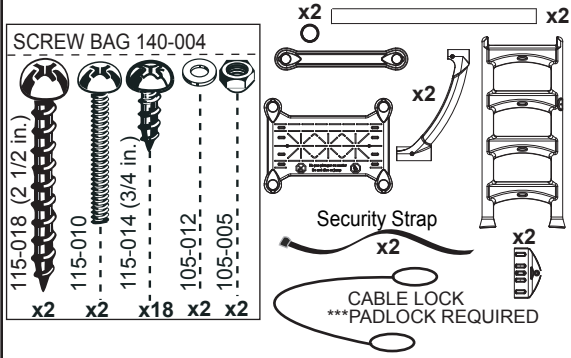

Contents of the Biltmor box SKU # 5015

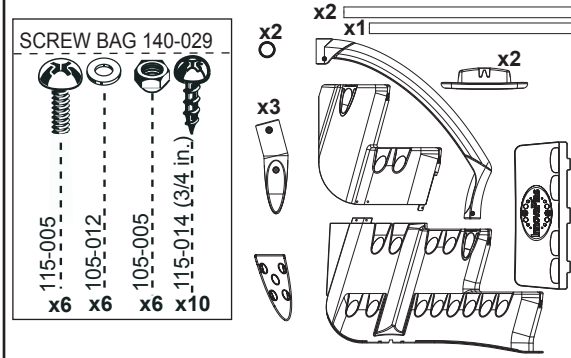

Sand (not included)

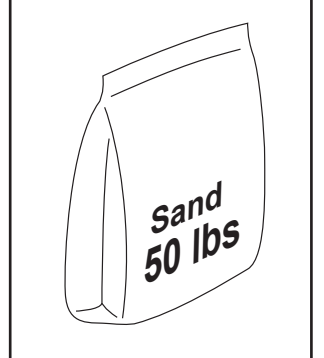


! WARNING

- ◆ Do not dive or jump from step or ladder.
- ◆ Use BATTERY operated tools to avoid electric shocks.
- ◆ Install step on flat surface, following the manufacturers instructions.
- ◆ Remove step from pool during freezing climate season.
- ◆ Manufacturer cannot be held responsible for injuries caused by abusive use of product.
- ◆ Ask your city about specific regulations that apply to your above-ground pool and ladder.

Required tools and supplies (not included)

A weather resistant padlock is recommended.


Maximum functional width is 1/4 inch.

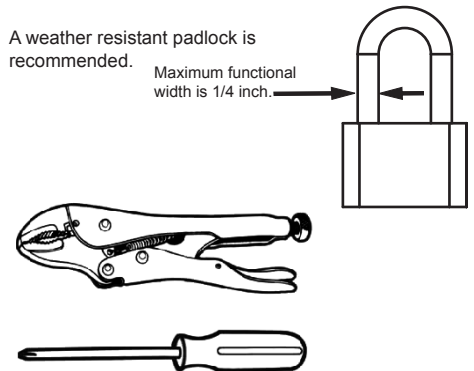

A


1) Assemble the two main modules with the six screws, nuts and washers provided.

2) Snap the door between the top and bottom modules within the slots provided.

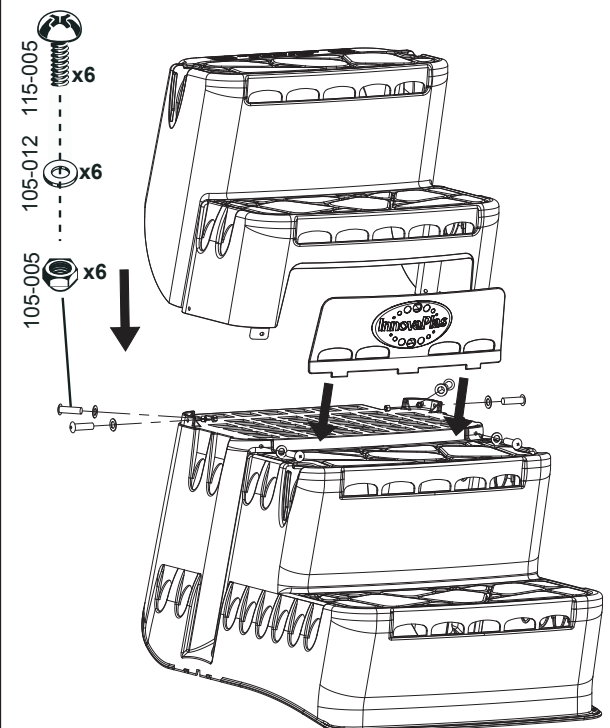


B

- 1) Snap the 3 post ends into the step making sure that the cylindrical part is vertical and that the ends are fitted properly in their respective housings.
- 2) Snap the filler cap into the bottom step as illustrated.
- 3) Snap the two feet onto the bottom of the step.

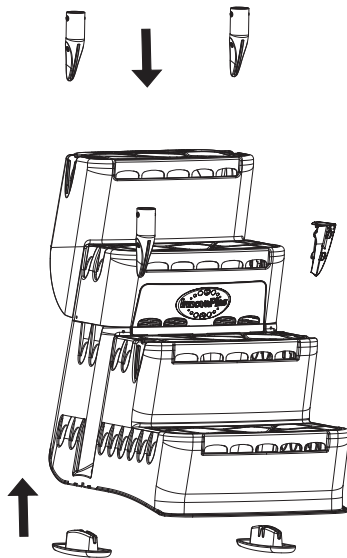


C

- 1) Insert the 2 large posts and the 35 inch post into the post ends and secure them in place with the screws provided.
- 2) Insert the platform over the 2 rear posts.
- 3) Install the 4 post covers in the handrails. Insert the small handrails first without securing them. Insert the large handrails next securing them with the screws provided. Place the small handrails at the base of the large handrails and secure in place with the screws provided.

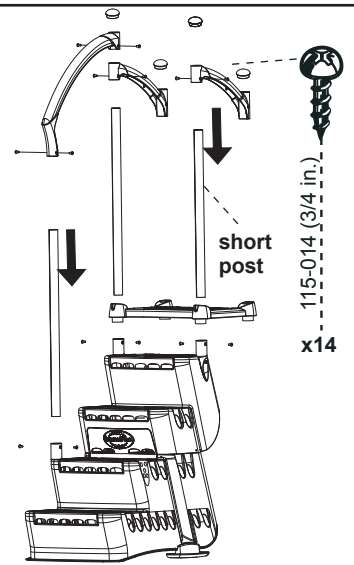


D

- 1) Insert a bag of sand onto surface provided at the rear of the step.

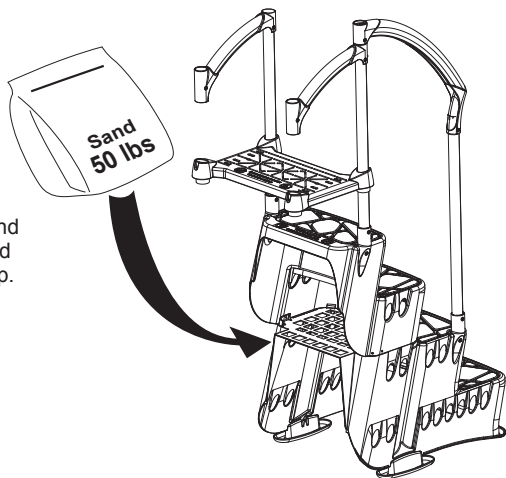

E

- 1) Slowly submerge the Step in the pool. Make sure you do not damage the liner in the process.
- 2) Once the step is in the pool secure the platform to the top seat (see illustration) using the two straps provided.

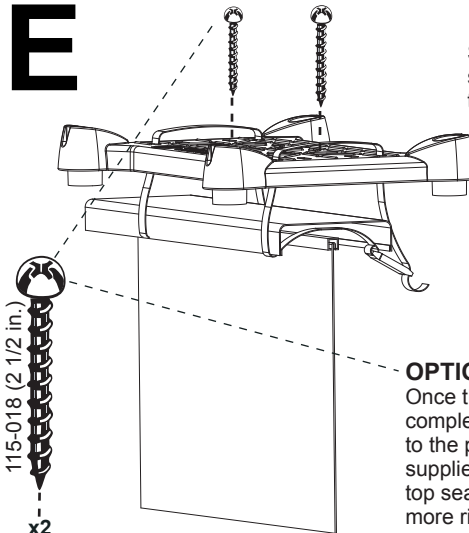


OPTIONAL:


Once the pool step has been completely assembled and secured to the pool, attach the 2 screws supplied through the platform to the top seat of your pool to provide a more rigid assembly.

F

- 1) Assemble the two posts through the platform and small handrails. Slide the pivot blocks onto the posts and secure at 40 1/4 inches from the bottom of the posts with screws provided.
- 2) Attach the ladder to the pivot blocks with the bolts, washers and nuts provided.
- 3) Finish the assembly by securing the platform and ladder base to the posts with the screws provided.

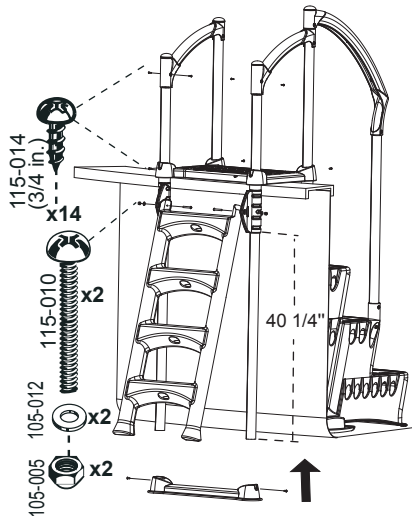

G

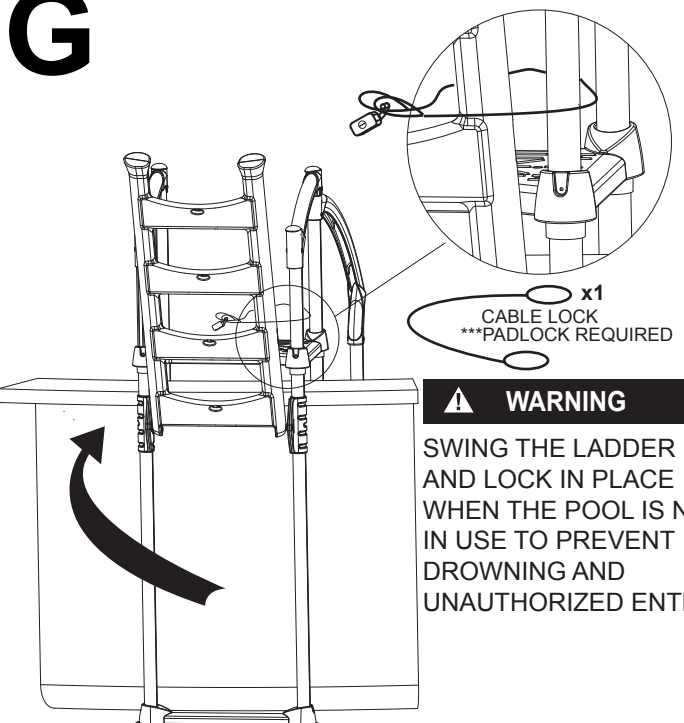

InnovaPlas
Products

101, P.M.E. Street
Sherbrooke (Québec),
Canada J1C 0R2

REV. 29/03/07
PN : 110-077




**MANUFACTURER
WARRANTY**


2 Years on the step
and ladder.
1 year on the hardware.

BILTMOR 5015 WITH CLASSIC 6002


Contents of the ladder box SKU # 6002

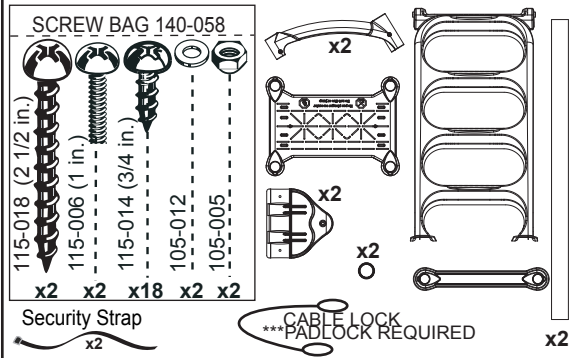

Contents of the Biltmor box SKU # 5015

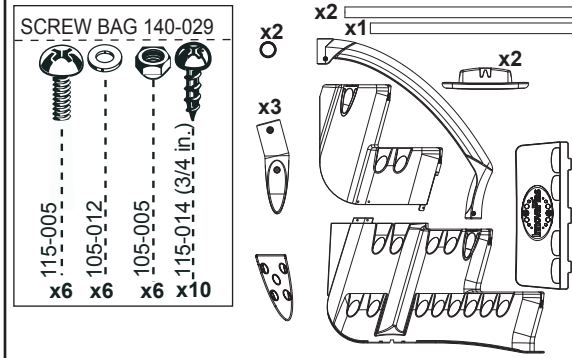

Sand (not included)

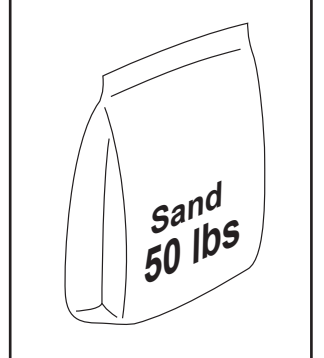



! WARNING

- ◆ Do not dive or jump from step or ladder.
- ◆ Use BATTERY operated tools to avoid electric shocks.
- ◆ Install step on flat surface, following the manufacturers instructions.
- ◆ Remove step from pool during freezing climate season.
- ◆ Manufacturer cannot be held responsible for injuries caused by abusive use of product.
- ◆ Ask your city about specific regulations that apply to your above-ground pool and ladder.

Required tools and supplies (not included)

A weather resistant padlock is recommended.


Maximum functional width is 1/4 inch.

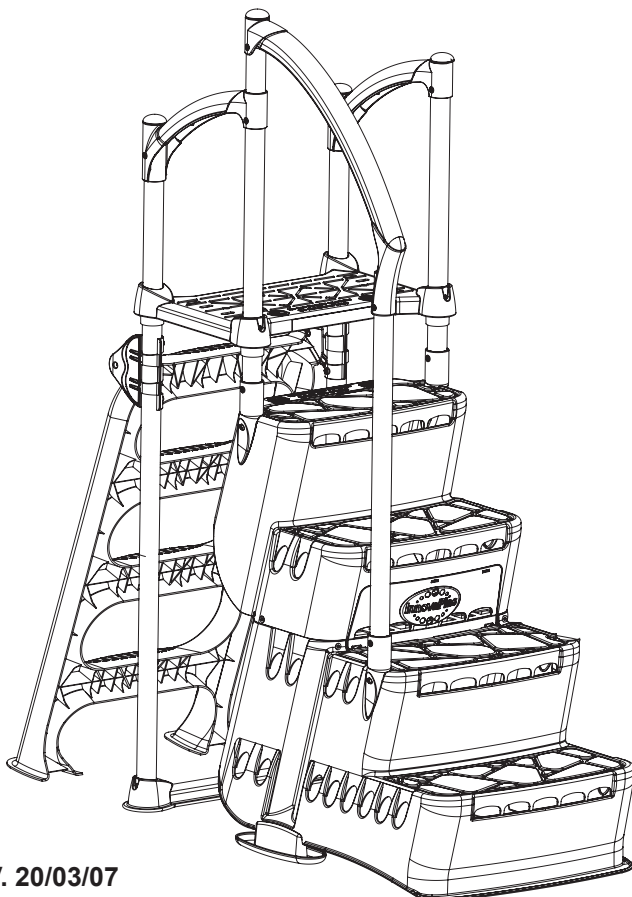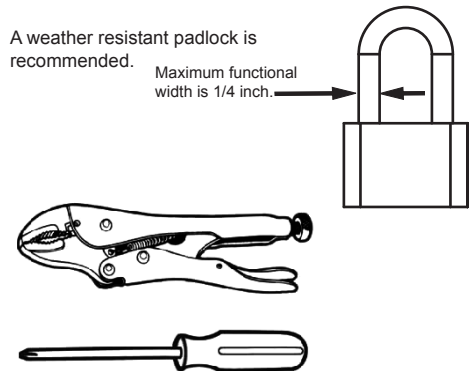

A

1) Assemble the two main modules with the six screws, nuts and washers provided.

2) Snap the door between the top and bottom modules within the slots provided.

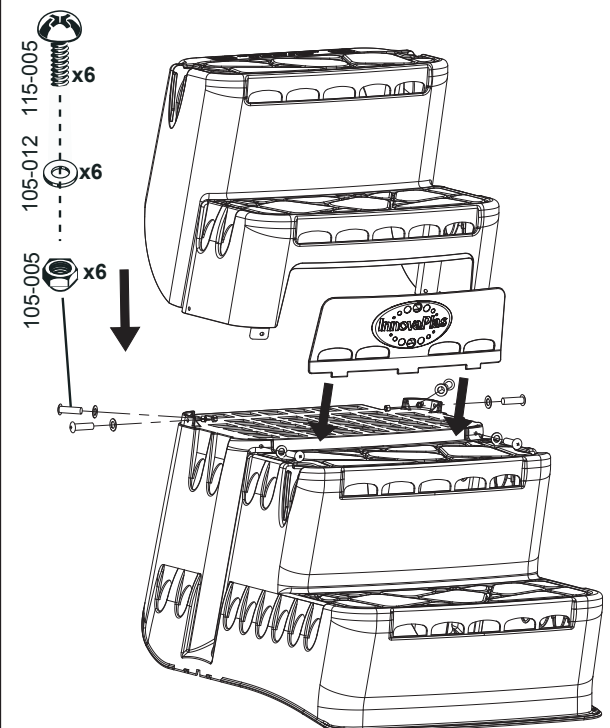


B

1) Snap the 3 post ends into the step making sure that the cylindrical part is vertical and that the ends are fitted properly in their respective housings.

2) Snap the filler cap into the bottom step as illustrated.

3) Snap the two feet onto the bottom of the step.

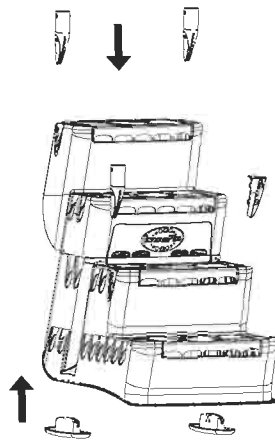


C

1) Insert the 2 large posts and the 35 inch post into the post ends and secure them in place with the screws provided.


2) Insert the platform over the 2 rear posts.

3) Install the 4 post covers in the handrails. Insert the small handrails first without securing them. Insert the large handrails next securing them with the screws provided.

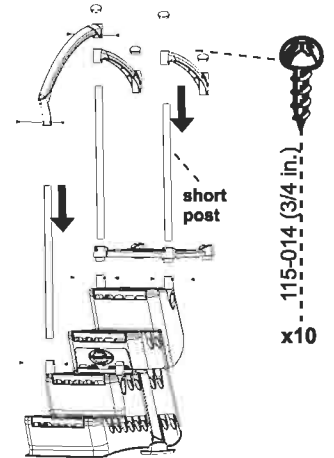

D

1) Insert a bag of sand onto surface provided at the rear of the step.

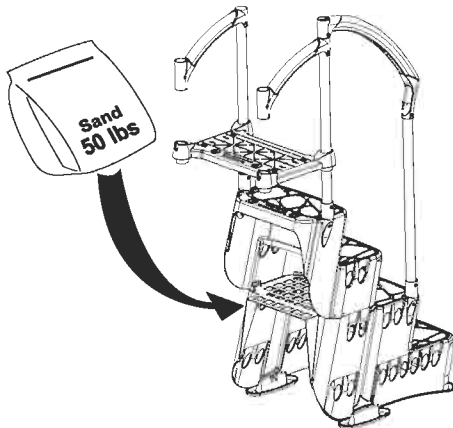


E

1) Slowly submerge the Step in the pool. Make sure you do not damage the liner in the process.

2) Once the step is in the pool secure the platform to the top seat (see illustration) using the two straps provided.

OPTIONAL:

Once the pool step has been completely assembled and secured to the pool, attach the 2 screws supplied through the platform to the top seat of your pool to provided a more rigid assembly.

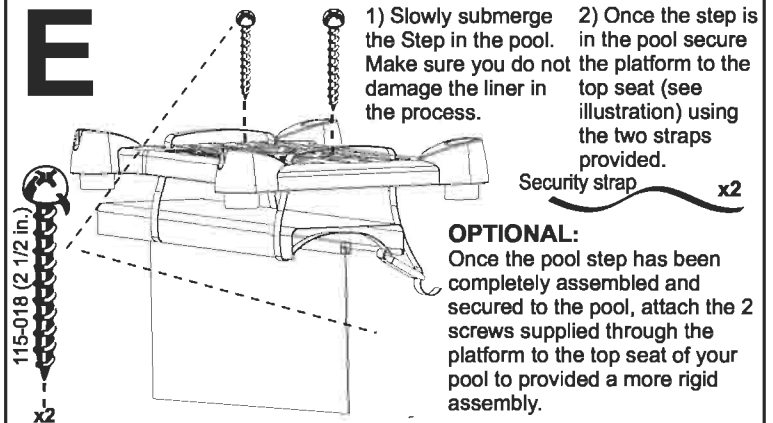

F


1) Trace a line on each post at 39 inches from the ground for 48" & 52" Pools. If you have a 54" pool trace a line at 40.5" from the ground.

2) Slide the pivot blocks onto the posts and line up with the traced marks. Secure with the screws provided.

3) Slide the 2 posts through the platform and handrails.


4) Secure the handrails and platform to the posts with the screws provided.

5) Secure the ladder base to the post with the screws provided.

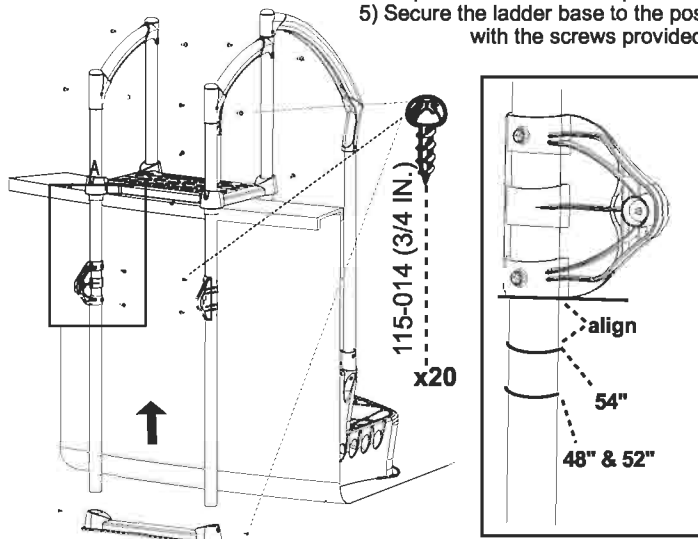

G

2) Secure the ladder to the pivot blocks using the bolts, washers and nuts provided.

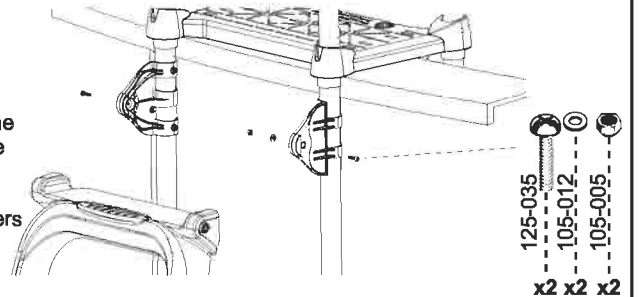


H

x1
CABLE LOCK
***PADLOCK REQUIRED

⚠ WARNING

SWING THE LADDER UP AND LOCK IN PLACE WHEN THE POOL IS NOT IN USE TO PREVENT DROWNING AND UNAUTHORIZED ENTRY.

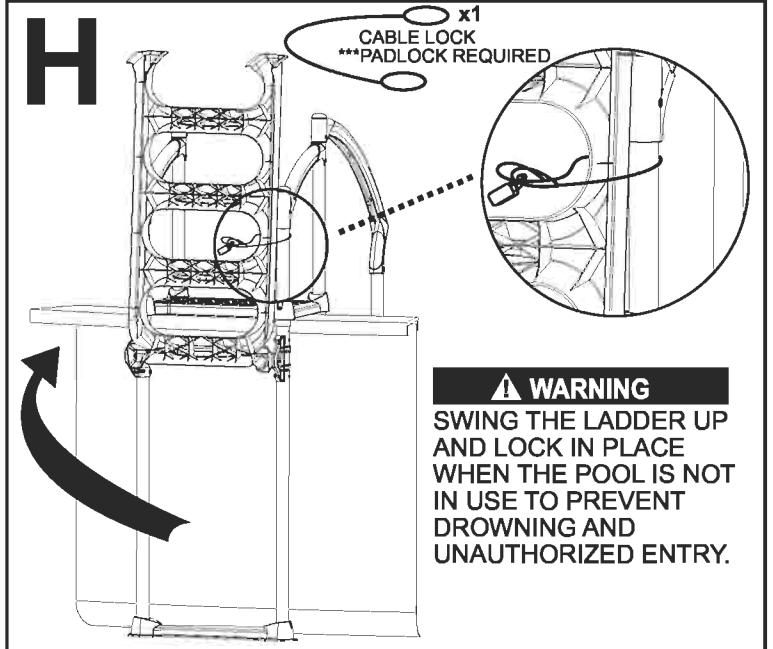

InnovaPlas
Products

101, P.M.E. Street
Sherbrooke (Québec),
Canada J1C 0R2

REV. 29/03/07
PN :




MANUFACTURER WARRANTY


2 Years on the Classic
ladder and Biltmor.
1 year on the hardware.

BILTMOR 5015 WITH SELF-LATCHING 9600


Contents of Self-Latching box SKU # 9600

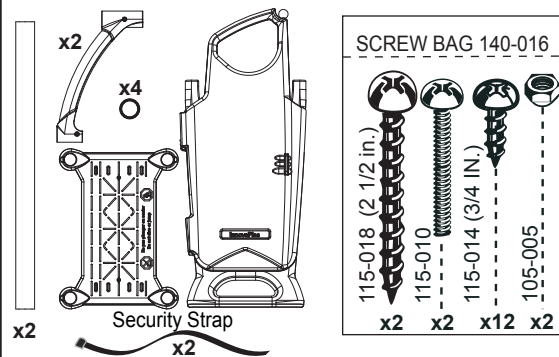

Contents of the Biltmor box SKU # 5015

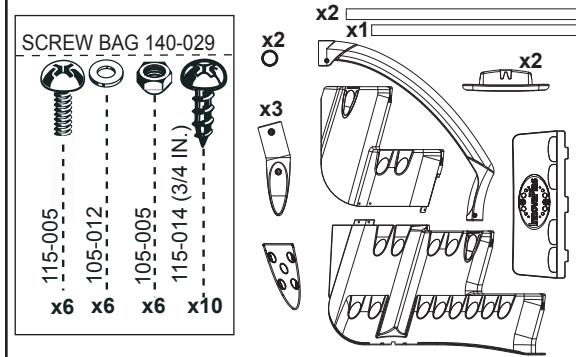

Sand (not included)


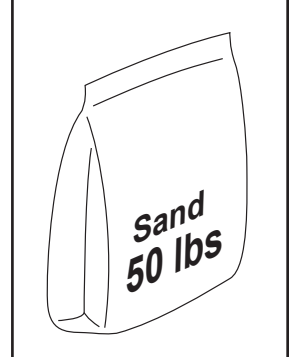


! WARNING


- ◆ Do not dive or jump from step or ladder.
- ◆ Use BATTERY operated tools to avoid electric shocks.
- ◆ Install step on flat surface, following the manufacturers instructions.
- ◆ Remove step from pool during freezing climate season.
- ◆ Manufacturer cannot be held responsible for injuries caused by abusive use of product.
- ◆ Ask your city about specific regulations that apply to your above-ground pool and ladder.

Required tools and supplies (not included)

A weather resistant padlock is recommended. Maximum functional width is 1/4 inch.




use small locking pliers / vice grip or a wrench 7/16"

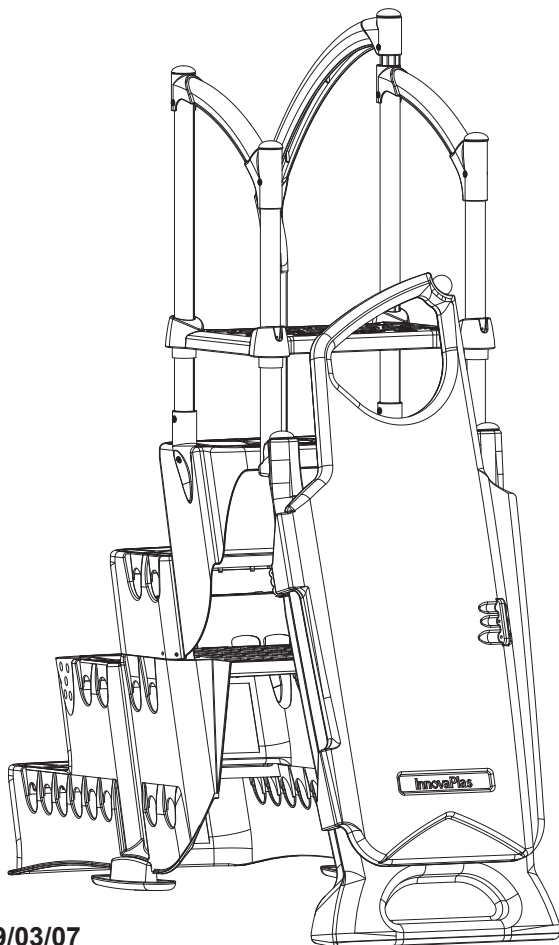

A

- 1) Assemble the two main modules with the six screws, nuts and washers provided.
- 2) Snap the door between the top and bottom modules within the slots provided.
- 3) Snap the 3 post ends into the step making sure that the cylindrical part is vertical and that the ends are placed and fitted properly in their respective housings.
- 4) Snap the filler cap into the bottom step as illustrated.

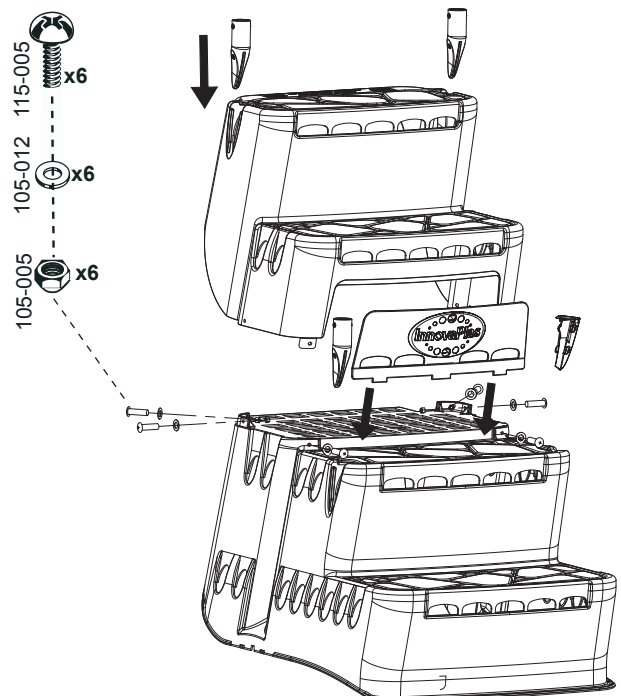


B

1) Insert the three posts into the post ends and secure them in place with the screws provided.

2) Insert the platform over the 2 rear posts.


3) Insert the small and large handrails as illustrated. Secure the large handrails with the screws provided. Place the small handrails at the base of the large and secure them in place with the screws provided.

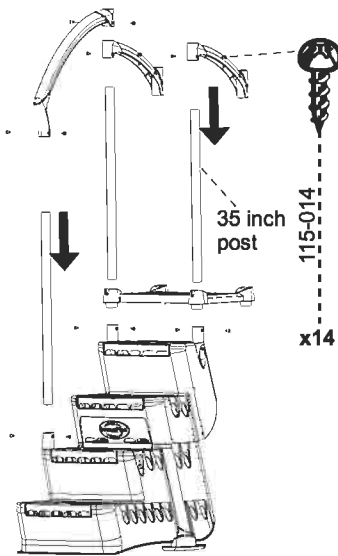

C

1) Install the four post covers.

2) Insert a bag of sand onto surface provided at the rear of the step.

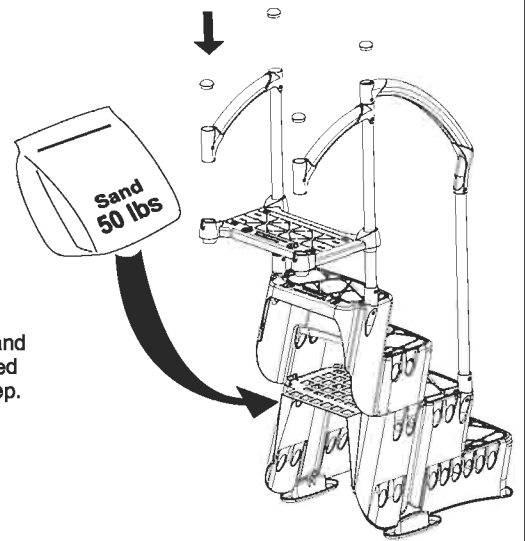

D


1) Slowly submerge the Step in the pool. Make sure you do not damage the liner in the process.

2) Once the step is in the pool secure the platform to the top seat (see illustration) using the two straps provided.

Security strap x2

OPTIONAL:

Once the pool step has been completely assembled and secured to the pool, attach the 2 screws supplied through the platform to the top seat of your pool to provide a more rigid assembly.

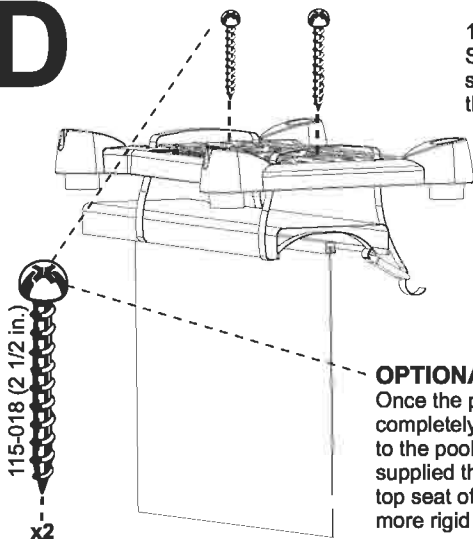


E

1) Insert the 2 posts into the rear holes of the step.

2) Force the posts to a vertical position flush with the rear surface and secure in place with the bolts and nuts provided.

3) Insert the post covers.

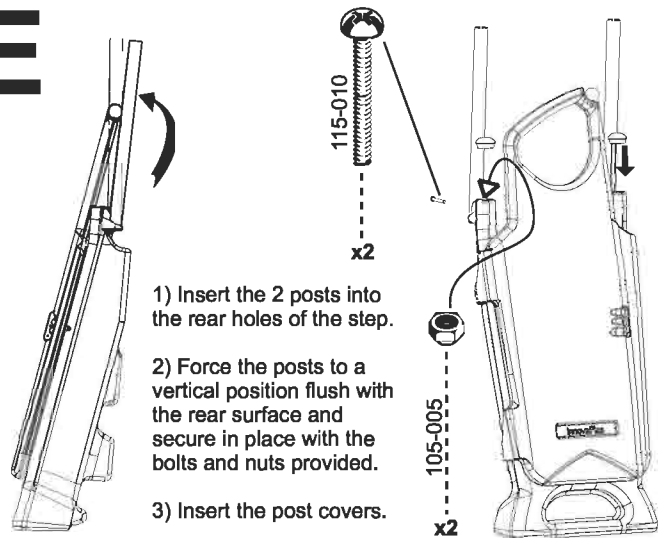


F

1) Slide the Self Latching posts through the platform and small handrails.

2) Secure the platform using the screws provided.


3) Secure the small handrails to the posts with the screws provided.

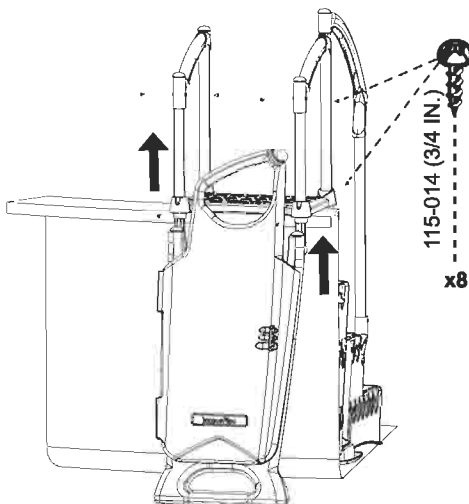

G

⚠ WARNING

LOCK THE DOOR TO THE STEP WITH A PADLOCK WHEN THE POOL IS NOT IN USE TO PREVENT DROWNING AND UNAUTHORIZED ENTRY.

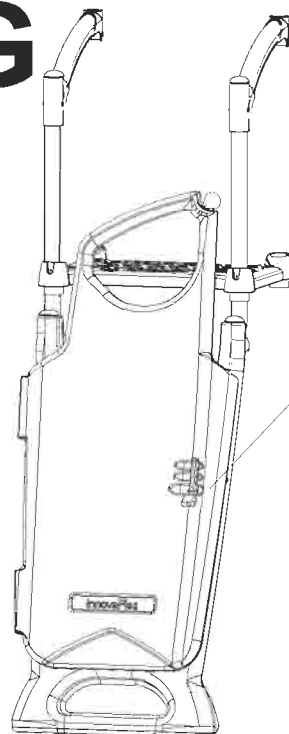

InnovaPlas

Products

101, P.M.E. Street
Sherbrooke (Québec),
Canada J1C 0R2

REV. 28/03/07
PN: 110-076




MANUFACTURER WARRANTY

2 Years on the
Self-Latching
System


1 year on the hardware

BILTMOR 5001 WITH SELF-LATCHING 9600


Contents of Self-Latching box SKU # 9600

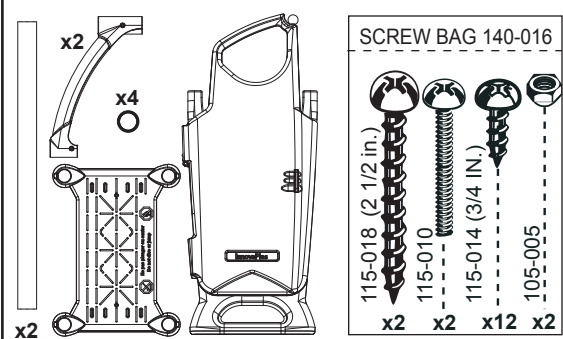

Contents of the Biltmor box SKU # 5001

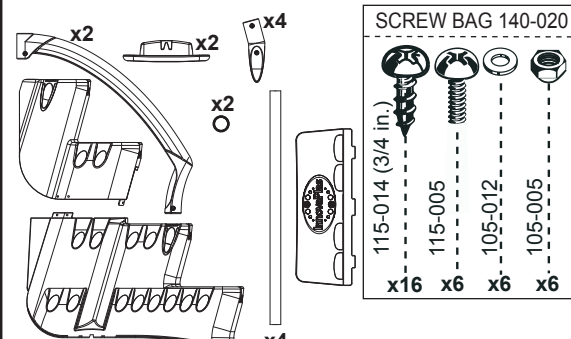

Sand (not included)





! WARNING

- ◆ Do not dive or jump from step or ladder.
- ◆ Use BATTERY operated tools to avoid electric shocks.
- ◆ Install step on flat surface, following the manufacturers instructions.
- ◆ Remove step from pool during freezing climate season.
- ◆ Manufacturer cannot be held responsible for injuries caused by abusive use of product.
- ◆ Ask your city about specific regulations that apply to your above-ground pool and ladder.


Required tools and supplies (not included)

A weather resistant padlock is recommended. Maximum functional width is 1/4 inch.

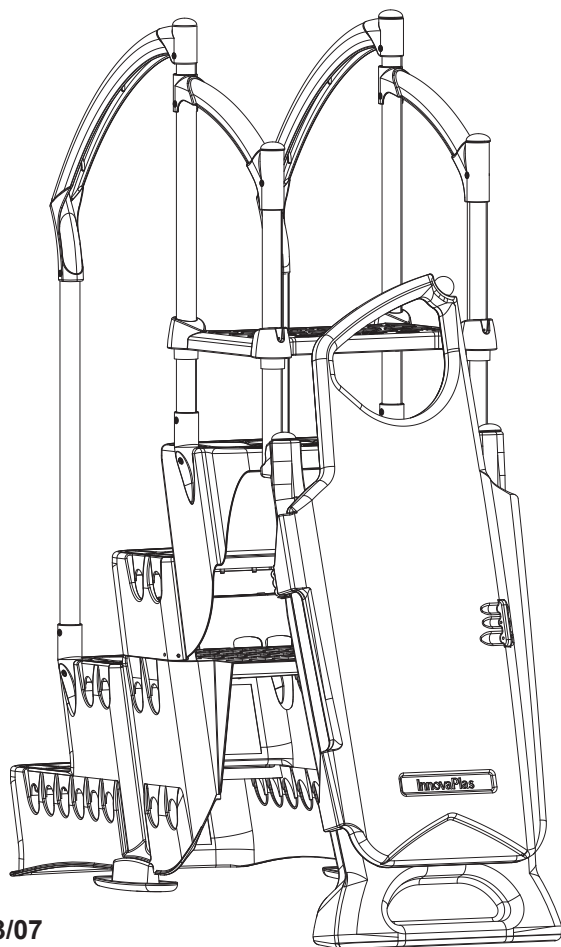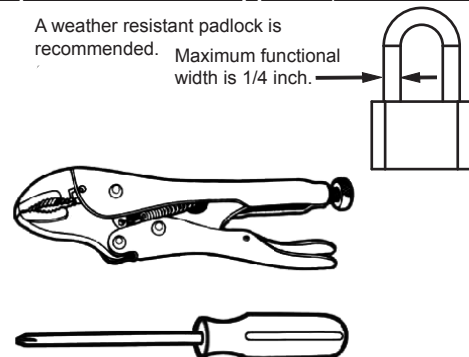


A

- 1) Assemble the two main modules with the six screws, nuts and washers provided.
- 2) Snap the door between the top and bottom modules within the slots provided.
- 3) Snap the four post ends into the step making sure that the cylindrical part is vertical and that the ends are placed and fitted properly in their respective housings.

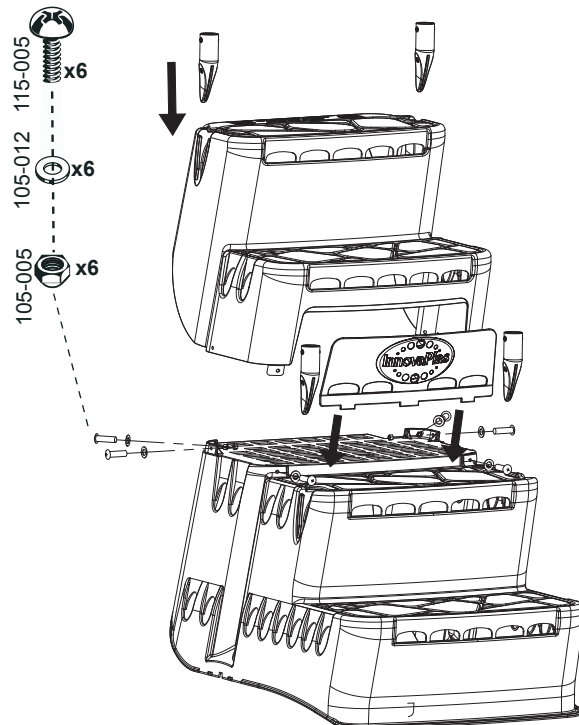


B

- 1) Snap the 2 feet to the bottom of the step.
- 2) Insert the four posts into the post ends and secure them in place with the screws provided.
- 3) Insert the platform over the 2 rear posts.
- 4) Insert the small and large handrails as illustrated. Secure the large handrails with the screws provided. Place the small handrails at the base of the large and secure them in place with the screws provided.

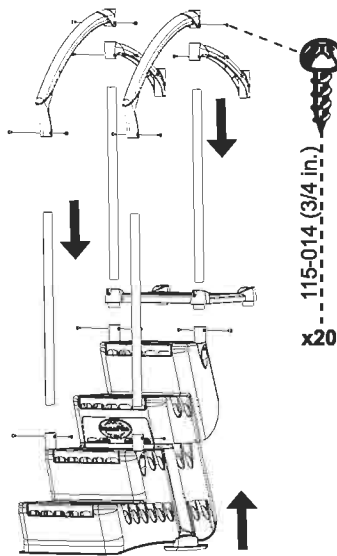

C

- 1) Install the four post covers.
- 2) Insert a bag of sand onto surface provided at the rear of the step.

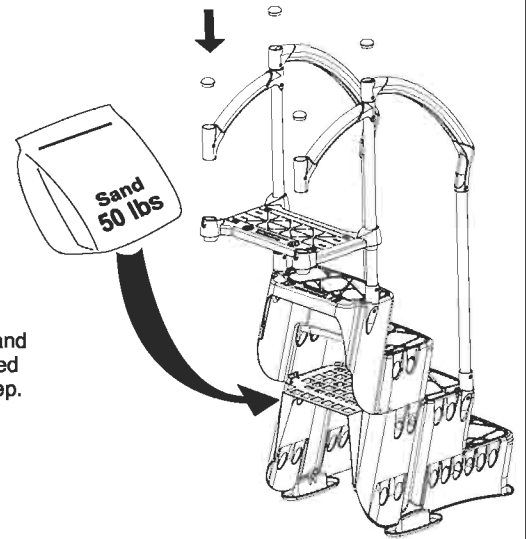


D

- 1) Slowly submerge the Step in the pool. Make sure you do not damage the liner in the process.
- 2) Once the step is in the pool secure the platform to the top seat (see illustration) using the two straps provided.

Security strap x2


OPTIONAL:

Once the pool step has been completely assembled and secured to the pool, attach the 2 screws supplied through the platform to the top seat of your pool to provide a more rigid assembly.

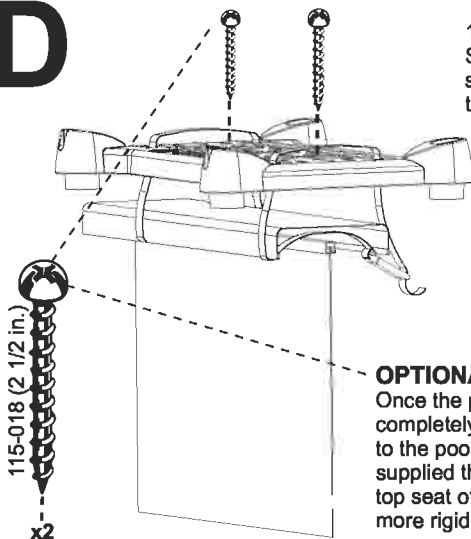


E

- 1) Insert the 2 posts into the rear holes of the step.
- 2) Force the posts to a vertical position flush with the rear surface and secure in place with the bolts and nuts provided.
- 3) Insert the post covers.

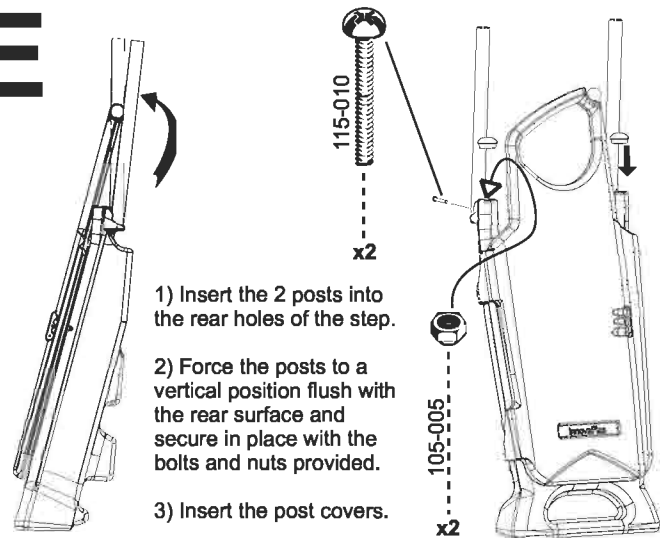


F

- 1) Slide the Self Latching posts through the platform and small handrails.
- 2) Secure the platform using the screws provided.
- 3) Secure the small handrails to the posts with the screws provided.

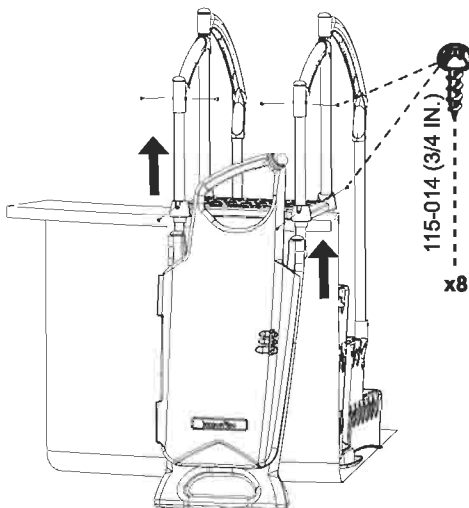

G



⚠ WARNING

LOCK THE DOOR TO THE STEP WITH A PADLOCK WHEN THE POOL IS NOT IN USE TO PREVENT DROWNING AND UNAUTHORIZED ENTRY.

InnovaPlas

Products

101, P.M.E. Street
Sherbrooke (Québec),
Canada J1C 0R2

MANUFACTURER WARRANTY

2 Years on the
Self-Latching
System and Biltmor.
1 year on the hardware

REV. 28/03/07
PN: 110-060

