

SP33 1/3hp SP50 1/2hp SP75 3/4hp

Best Performance in the Industry

- Maximum flow rate to 80gpm (SP75), 66gpm (SP50), 50gpm, (SP33)
- · Maximum shutoff head of 33'
- Permanent split capacitor motor for reliable, high performance, longer motor life, greater starting torque, and lower amp draw
- · Stainless steel hardware and shaft
- · GFCI compatible for safety
- · Pass up to 1/2" solids

Interchangeability with other Effluent Pumps

Barnes effluent pumps save time and replacement costs because they are interchangeable with competing effluent pump models. They require no additional plumbing when replacing most competitors' pumps.

24 mo.
WARRANTY

brands you trust.


Barnes SP33, SP50, & SP75 effluent pumps feature low cost, high performance benefits from a rugged, heavy duty design. With upper and lower ball bearings and a heavy duty cast iron vortex impeller, Barnes SP33, SP50 & SP75 effluent pumps are robustly designed for long operational life and dependable service. They are further enhanced by a stainless steel shaft and hardware, plus an industrial grade mechanical seal.


BARNES



Additional

- · Cast iron vortex impeller
- 1/2" spherical solids capacity
- Permanent split capacitor motor
- · Automatic thermal overload protection
- Upper and lower ball bearings
- · CSA C/US listed
- · Stainless steel shaft hardware
- Heavy duty industrial Type 21 carbon/ ceramic seal



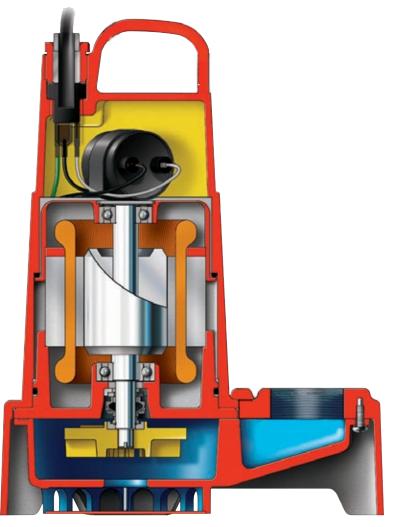

PUMPS & SYSTEMS

A Crane Co. Company

Crane Pumps & Systems 420 Third Street Piqua, Ohio 45356 (937) 778-8947 Fax (937) 773-7157 www.cranepumps.com Crane Pumps & Systems Canada 83 West Drive Brampton, Ont. Canada L6T 2J6 (905) 457-6223 Fax (905) 457-2650 © 2012 Crane Pumps & Systems, Inc. A Crane Co. Company Printed in U.S.A. BPPSPEFF - Rev. A (8/12)

brands you trust.











