


J&J Electronics™

A photograph of a modern, two-story house at night. The house has a dark roof and white walls. The interior lights are on, and the house is surrounded by lush greenery. In the foreground, there is a swimming pool with a stone-tiled edge. The water in the pool is illuminated with a blue light. The overall scene is a high-quality, professional photograph used for a brochure or advertisement.

Transforming

Pool, Spa and Fountain Lighting
through LED Technology

What makes J&J Electronics So Different?

J&J Electronics is an innovative and dynamic company that was founded in 1982 as a technology company. It has evolved into one of the leading LED Pool and Spa Lighting companies providing high-quality, competitively priced LED lighting to the commercial and residential pool markets. In-house design, engineering, and manufacturing have allowed J&J Electronics to develop cutting edge products that offer uncompromising quality and unparalleled, feature-driven performance. ColorSplash® multi-color Pool & Spa Lamps and Fixtures along with PureWhite® Pool & Spa Lamps and Fixtures have grown to become industry-leading, trusted brands in both the residential and commercial pool marketplace nationwide.



Table of Contents

Page 3-5 ColorSplash LED Pool and Spa Fixtures and Lamps

Page 6-8 PureWhite LED Pool and Spa Fixtures and Lamps

Page 9 Traditional Pool Fixtures, Pool Transformers, and Accessories

Page 11-15 Fountain Luminaires

Multi-Color Plus White In-Ground LED Pool and Spa Lighting Fixtures

J&J Electronics' Color Splash® Series of in-ground pool and spa fixtures and lamps offer a variety of lighting colors and shows. With five solid color and seven lights shows, instantly transform any pool or spa into a custom illuminated paradise. Color Splash® Series fixtures and lamps operate with a standard pool light switch, J&J Electronics' XG Controller or can be integrated into most Pentair® and Jandy® automation systems; enabling a "one touch" color show selection. Our VUJ 1.5" nicheless pool and spa fixtures are also available as part of the ColorSplash® fixture series. These versatile fixtures easily retrofit into most 1.5" wall fittings.

ColorSplash Fixture Advantages:

- RGB and RGB-W models available
- Operates with most manufacturers automation systems
- Zero Pixelation Lens provides fuller, richer color*
- Heavy Duty 316 Stainless Steel Construction*
- Advanced processor delivers seamless color transitions
- Industry leading 3-year limited warranty
- Designed, engineered and assembled in the USA

ColorSplash Lamp Advantages:

- RGB and RGB-W models available
- Operates with most pool automation systems
- Preset with 5 solid colors and 7 light shows
- Zero Pixelation Lens provides fuller, richer color*
- Compatible with most manufacturers fixtures
- Industry leading 3-year limited warranty
- Designed, engineered and assembled in the USA

* Not applicable with VUJ fixtures

COLORSPASH POOL & SPA LIGHT FIXTURES



Voltage	120VAC or 12VAC
Wattage	33W (Max.)
LED Color	White(6500K)
Lumen Output	1500lm (max.)
Equivalent	300W Incandescent
Housing	316 Stainless Steel
Lens	Zero Radiation Glass
Cord Type	12V - 12/3 SJTW
Cord Lengths	30' 50' 100' 150'
	(200' - 300' - 120V only)



Voltage	120VAC or 12VAC
Wattage	59W (Max.)
LED Color	White(6500K)
Lumen Output	4270lm (max.)
Equivalent	500W Incandescent
Housing	316 Stainless Steel
Lens	Zero Radiation Glass
Cord Type	12V - 12/3 SJTW
Cord Lengths	30' 50' 100' 150'
	(200' - 300' - 120V only)



Voltage	120VAC or 12VAC
Wattage	4W (Max.)
LED Color	White(6500K)
Lumen Output	265lm (max.)
Equivalent	< 100W Incandescent
Housing	316 Stainless Steel
Lens	Zero Radiation Glass
Cord Type	12V - 12/3 SJTW
Cord Lengths	30' 50' 100' 150'
	(200' - 300' - 120V only)

HOW TO BUILD A PART NUMBER

PART NUMBER EXAMPLE: LPL-F2CW-120-50-P

LED Pool/Spa Light Fixture, 500W Equip, RGB-W, RGB, 120V, 50' Cord, Polished Faceplate

PREFIX	MODEL #	VOLTAGE	CORD LENGTH	FACEPLATE
LPL	-	-	-	-
	insert code into box	insert code into box	insert code into box	insert code into box
	F1CW for F1CW Model RGB-cool white	120 for 120Volt	30'	P for polished (fits Pentair, Hayward & Jandy Niches)
	F2CW for F2CW Model RGB-cool white	12 for 12Volt	50'	PSQ for polished (fits select Sea-Rite Swim-Quip Niches)
	S2CW for S2CW Model RGB-cool white		100'	
			150'	
			200' (120V only)	
			300' (120V only)	

COLORSPASH-VU NICHELESS FIXTURES



Voltage	12VAC
Wattage	8W
LED Color	RGB-W, Cool White(6500K)
Housing	DV Rated Polycarbonate
Lens	DV Rated Polycarbonate (Clear)
Cord Type	18/2 SJTW
Cord Lengths	30' 50' 100' 150'



Voltage	12VAC
Wattage	20W
LED Color	RGB-W, Cool White(6500K)
Housing	DV Rated Polycarbonate
Lens	DV Rated Polycarbonate (Clear)
Cord Type	18/2 SJTW
Cord Lengths	30' 50' 100' 150'

HOW TO BUILD A PART NUMBER

PART NUMBER EXAMPLE: LPL-R2CW-12-50

LED Nicheless Pool/Spa Light Fixture, 20W, RGB-W, 12V, 50' Cord

PREFIX	MODEL #	VOLTAGE	CORD LENGTH
LPL	-	-	-
	insert code into box	insert code into box	insert code into box
	R1CW for R1CW Model RGB-W	12	30'
	R2CW for R2CW Model RGB-W		50'
			100'
			150'

COLORSPASH POOL & SPA LAMPS



Product Code	Voltage (AC)	Input Power (max.)	Color Temperature	Lumens
LPL-P3-RGBW-120	120V	17W	RGB-6500K	1577
LPL-P3-RGBW-12	12V	16W	RGB-6500K	1235
LPL-S3-RGBW-120	120V	7W	RGB-6500K	399
LPL-S3-RGBW-12	12V	6W	RGB-6500K	385

HOW TO BUILD A PART NUMBER

PART NUMBER EXAMPLE: LPL-P2-RGBW-12

LED Replacement Pool Lamp, RGBW, 12V

PREFIX	SERIES#	MODEL #	VOLTAGE	GASKET TYPE
LPL	-	-	-	-
				insert code into box
	P3 for POOL LAMP	RGBW for RGBW LAMP	120 for 120Volt	Leave box blank for Pentair style
	S3 for SPA LAMP		12 for 12Volt	SQ for SwimQuip Style
				H for Hayward Style



The standard in white LED lighting

J&J Electronics PureWhite® LED light fixtures and lamps offer unmatched brightness and energy efficiency for pool and spa lighting. Utilizing high performance Cool White LEDs, the appearance of pool water is improved by producing brilliant, natural looking light; making PureWhite® fixtures and lamps the perfect choice for everything from heavy use commercial application to backyard family pools. Our VU 1.5" nicheless pool and spa fixtures are also available as part of the PureWhite® fixture series. These versatile fixtures easily retrofit into most 1.5" wall fittings.

- PureWhite® Fixture Advantages:**
- 100W-500W standard incandescent equivalent
 - Zero Pixelation Lens*
 - Heavy Duty 316 Stainless Steel construction*
 - Industry leading 3-year limited warranty
- PureWhite® Lamp Advantages:**
- Reduces energy consumption up to 90%
 - Designed for commercial and residential pool and spa use
 - Cool white light enhances pool water appearance
 - Compatible with most manufacturers fixtures

PUREWHITE POOL & SPA LIGHT FIXTURES

PureWhite LED - F1 Model Pool Light Fixture



Voltage	120VAC or 12VAC
Wattage	39W
LED Color	Cool White (6500K) Warm White (2700K)
Lumen Output	Cool White - 2400 lm Warm White - 1840 lm
Equivalent Housing	300W Incandescent 316 Stainless Steel
Lens	Zero Pixelation Glass
Cord Type	120V - 16/3 STWA 12V - 12/3 SJTW
Cord Lengths	30' 50' 100' 150' (200' 300' - 120V only)

PureWhite LED - F3 Model Pool Light Fixture



Voltage	120VAC or 12VAC
Wattage	38W
LED Color	Cool White (6500K) Warm White (2700K)
Lumen Output	Cool White - 3900 lm Warm White - 2991 lm
Equivalent Housing	500W Incandescent 316 Stainless Steel
Lens	Zero Pixelation Glass
Cord Type	120V - 16/3 STWA 12V - 12/3 SJTW
Cord Lengths	30' 50' 100' 150' (200' 300' - 120V only)

PureWhite LED - F5 Model Pool Light Fixture



Voltage	120VAC or 12VAC
Wattage	87W
LED Color	Cool White (6500K) Warm White (2700K)
Lumen Output	Cool White - 4500 lm Warm White - 4150 lm
Equivalent Housing	500W+ Incandescent 316 Stainless Steel
Lens	Zero Pixelation Glass
Cord Type	120V - 16/3 STWA 12V - 12/3 SJTW
Cord Lengths	30' 50' 100' 150' (200' 300' - 120V only)

PureWhite LED - S1 Model Spa Light Fixture



Voltage	120VAC or 12VAC
Wattage	13W
LED Color	Cool White (6500K) Warm White (2700K)
Lumen Output	Cool White - 500 lm Warm White - 400 lm
Equivalent Housing	100W Incandescent 316 Stainless Steel
Lens	Zero Pixelation Glass
Cord Type	120V - 16/3 STWA 12V - 12/3 SJTW
Cord Lengths	30' 50' 100' 150' (200' 300' - 120V only)

HOW TO BUILD A PART NUMBER

PART NUMBER EXAMPLE: LPL-F3W-120-50-P

LED Pool Light Fixture - 500W, Equip. Cool White, 120V, 50' Cord, Polished Faceplate for Pentair, Hayward and Jandy Niche

PREFIX	MODEL #	VOLTAGE	CORD LENGTH	FACEPLATE
LPL	insert code into box F1W for F1 Model Cool White F3W for F3 Model Cool White F5W for F5 Model Cool White S1W for S1 Model Cool White	insert code into box 120 for 120Volt 12 for 12Volt	insert code into box 30' 50' 100' 150' 200' (120V only) 300' (120V only)	insert code into box P for polished (fits select Pentair, Hayward & Jandy Niche) and Cool White P27 for polished (fits select Pentair, Hayward & Jandy Niche) and Warm White PSD for polished (fits select Sta-Rite Swim-Quip Niche) and Cool White PSO27 for polished (fits select Sta-Rite Swim-Quip Niche) and Warm White M for matte (fits select Sta-Rite Swim-Quip, Niches) and Cool White M27 for matte (fits select Sta-Rite Swim-Quip, Niches) and Warm White

PUREWHITE POOL & SPA LAMPS

PureWhite-PRO LED Pool/Spa Lamp

Product Code	Voltage (AC)	Input Power	Color Temperature	Lumens	Incandescent Equiv.	Fixture compatibility
LPL-PR2-CW-120	120V	28W	6500K	3144	300W	J&J Electronics TPL-P Series;
LPL-PR2-WW-120	120V	28W	2700K	2921	300W	Hayward® AstroLite™ SP058 Series;
LPL-PR2-CW-12	12V	32W	6500K	3295	300W	Jacuzzi® Full Moon™;
LPL-PR2-WW-12	12V	32W	2700K	2794	300W	Jandy® Pro Series White
LPL-PRHO-CW-120	120V	37W	6500K	4588	500W	Pentair® Ametrite™ w/784 Series;
LPL-PRHO-WW-120	120V	37W	2700K	4185	500W	Sta-Rite® Swim Club® II
LPL-M2-CW-120	120V	13W	6500K	1202	100W	J&J Electronics TPL-S Series;
LPL-M2-WW-120	120V	13W	2700K	1332	100W	Hayward® AstroLite™ SP059 Series;
LPL-M2-CW-12	12V	15W	6500K	1545	100W	Pentair® Spalrite™ Series;
LPL-M2-WW-12	12V	15W	2700K	1333	100W	Jandy® Pro Series White



HOW TO BUILD A PART NUMBER

PART NUMBER EXAMPLE: LPL-PR-WHT-120	SERIES #	COLOR	VOLTAGE	GASKET TYPE
LED Replacement Pool Lamp, 300W Equiv., Cool White, 120V, Inrd. gasket for Pentair Pool Fixtures				
PREFIX				
LPL		WHT	12	
insert code into box				
PR2 for PureWhite-PRO Spa Lamp				insert code into box
PRHO for PureWhite-PRO High Output Pool Lamp			120 for 120V, 12 for 12Volt	insert code into box
M2 for PureWhite-PRO Spa Lamp				insert code into box
				SO for S.O.C. Style
				H for Hayward Style

PUREWHITE-VU NICHELESS FIXTURES

PureWhite-VU LED
R1W Model
Pool/Spa Fixture

PureWhite-VU LED
R2W Model
Pool/Spa Fixture

Voltage	12VAC
Wattage	8W
LED Color	Cool White (6500K)
Housing	UV Rated Polycarbonate
Lens	UV Rated Polycarbonate (Clear)
Cord Type	18/2 SJTW
Cord Lengths	3'0" - 50' - 100' - 150'

Voltage	12VAC
Wattage	20W
LED Color	Cool White (6500K)
Housing	UV Rated Polycarbonate
Lens	UV Rated Polycarbonate (Clear)
Cord Type	18/2 SJTW
Cord Lengths	3'0" - 50' - 100' - 150'

HOW TO BUILD A PART NUMBER

PART NUMBER EXAMPLE: LPL-R1W-12-50	MODEL #	VOLTAGE	CORD LENGTH
LED Nicheless Pool/Spa Light Fixture, Cool White, 12V, 50' Cord			
PREFIX			
LPL		12	
insert code into box			
			insert code into box
			R1W for R1W Model Cool White
			R2W for R2W Model Cool White
			30'
			50'
			100'
			150'

In-Ground Incandescent Pool & Spa Light Fixture

J&J Electronics® Incandescent Pool Light Fixtures provide an economical and safe pool lighting plus a rugged construction that is unmatched in the industry.

Features:

- Custom optical lens provides superior light diffusion
- Contemporary housing and faceplate styling
- 1-year limited warranty
- Assembled in the USA




PureWhite-TPL Incandescent Pool Light Fixture

Voltage	120VAC or 12VAC
Wattage	400W, 500W 120V only
Lamp Lumen	4150lm/400W 5400lm/500W
Housing	316 Stainless Steel
Lens	Optical Diffusing Glass
Cord Type	120V - 16/2 SJTW 12V - 12/3 SJTW
Cord Lengths	3'0" - 50' - 100' - 150' - 200' - 300' - 120V only

HOW TO BUILD A PART NUMBER

PART NUMBER EXAMPLE: TPL-R1-12-500-20	SERIES/VOLTAGE	WATTAGE	CORD LENGTH
Incandescent Pool Light Fixture, 120V, 500W, 50' Cord			
PREFIX			
TPL			
insert code into box			
		insert code into box	insert code into box
		R120 for 120V	50'
		R12 for POOL FIXTURE - 12V	100'
		400 for 400W	150'
			200' (120V only)
			300' (120V only)

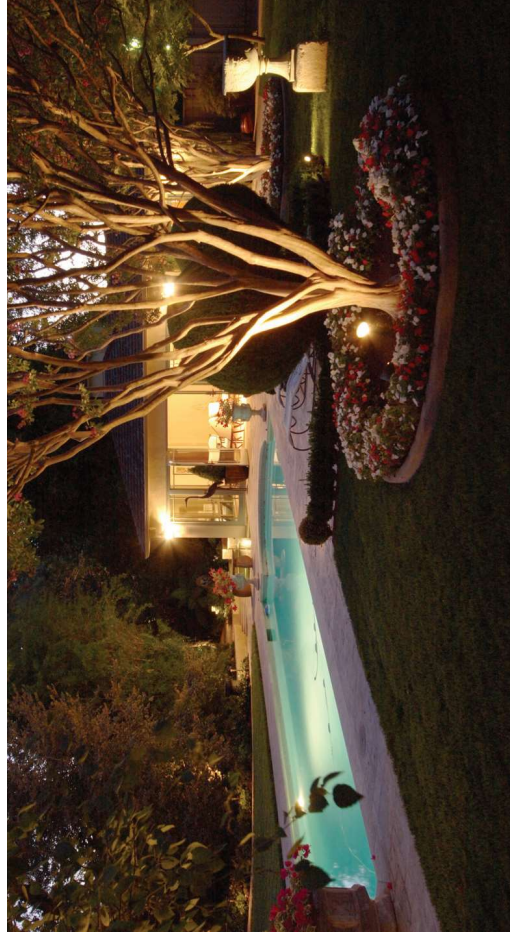

COLORSPASH XG CONTROLLER

J&J Electronics® XG Controller provides complete control of the ColorSplash pool and spa fixtures right from the palm of your hand.

Features:

- BLUETOOTH enabled
- Cost effective - no need for expensive automation system
- Compact size - replaces an existing light switch
- Free XG Controller APP for Apple and Android devices



Voltage	120VAC 60HZ
Max. Load	400W
Environment	Outdoor Rated. Must use supplied gasket and WET LOCATION RATED outlet box
For Use with	ALL COLORSPLASH LED - XG and XG-W Pool and Spa Fixtures - LXG and LXG-W Pool and Spa Lamps - ColorSplash Fountain Fixtures
Order Code	LPL-XG-CTRL-1

GUARDIAN™ SILICONE REPLACEMENT LENS GASKET

Guardian's 100% silicone pool and spa lens gaskets provide superior resistance from chlorine, heat and sunlight for a longer lasting seal than rubber based gaskets.

Features:

- 100% Silicone material; superior chemical and heat resistance
- Designed to last the life of J&J's LED lamps
- Multiple models compatible with most pool and spa lights



ITEM #	FITS FIXTURE MODEL
LPL-G-PI	Pentair AmerLite, 784 Series
LP-LM-G-PI	Pentair SpaBrite Series
LPL-G-SI	Sta-Rite SwimQuip Series 0508
LPL-G-HI	Hayward AstroLite Series SP0580
LPL-M-G-HI	Hayward AstroLite Series SP0590

J&J POOL TRANSFORMER

J&J Electronics Pool & Spa Transformers are specifically designed to operate in harsh environments, such as high humidity, combined with heat, and chemicals typically found around pools, spas and fountains.

Features:

- Approved to UL Pool Standards
- Easy Installations
- Removable Mounting Brackets



Housing	Powder-Coated Steel
Wattage	100W - 300W
Input Voltage	120VAC 60 Hz
Output voltages	12VAC 13VAC 14VAC
Certification	UL379 Listed
Order Code 100W	TR-100-PP
Order Code 300W	TR-300-PP



LED Fountain Luminaires

Brighten up your water features' appearance with the cleaner and clearer look of our PureWhite® warm white or cool white LED fountain lights. Or perhaps create a more custom color-rich appeal with the multiple colors and shows of our Color Splash® color changing LED luminaires. Our LED Underwater and Wet/Dry Fountain Luminaires create the ideal setting for any water feature environment while significantly reducing energy consumption and maintenance costs, compared to traditional light sources.

Advantages:

- High Lumen Output
- Wet/Dry or Underwater options
- Reduces energy usage by 90%
- Highly corrosion resistant bronze and 316 stainless
- Industry leading 3-year limited warranty
- Designed, engineered and assembled in the USA

UNDERWATER FOUNTAIN LUMINAIRES

PureWhite LED - FLS STAMPED SERIES

Voltage:	120VAC or 12VAC
Wattage:	Large: F1 =39W F3 =58W F5 =87W Small: S1 =13W
Rating:	IP68
Color Temp:	Warm White (2700K) or Cool White (6500K)
Lumen Output:	Warm White: F1L = 1840lm, F3L = 2991lm, F5L = 4001lm, S1L = 400lm Cool White: F1W = 2400lm, F3W = 2991lm, F5W = 4500lm, S1W = 400lm
Beam Spread:	120° Flood
LED Rating:	50,000 hrs
Dimming:	120V only - Contact J&J for instructions
Material:	316 Stamped Stainless Steel Construction
Faceplate:	No Guard: Stamped, polished finish With Guard: Casted, matte finish
Hardware:	316 Stainless Steel



Cable Strain Relief:	Nickel Plated Brass
Overheat Protection:	Integrated thermal cut-off switch
Lens:	Impact resistant tempered glass (frosted)
Cable Length:	10' 30' 50' 100' 150'
Cable Type:	120V = 16/3 STW 105°C 600V Diam: 400" 12V = 12/3 SJTW 105°C 300V Diam: 421"
Environment:	MUST BE SUBMERGED 2' min. 9' max.
Fixture Rotation:	140° (fixture rotation when base is bolted)
Light Swivel:	180° (when used with base)
Certification:	ETL listed for underwater applications
Warranty:	3 Year Limited Warranty

HOW TO BUILD A PART NUMBER

PART NUMBER EXAMPLE: LFF-F3W-120-WG-WB-50									
PREFIX	MODEL #	VOLTAGE	FACEPLATE	BASE	CORD LENGTH				
LFF	-	-	-	-	-				
	insert code into box	insert code into box	insert code into box	insert code into box	insert code into box				
	F1L for 39W Warm White Fixture F3L for 58W Warm White Fixture F5L for 87W Warm White Fixture S1L for 13W Warm White Fixture	120 for 120Volt 12 for 12Volt	WG for Rock Guard Option NG for No Guard Option	WB for Base Option NB for No Base Option	10' 30' 50' 100' 150'				
	F1W for 39W Cool White Fixture F3W for 58W Cool White Fixture S1W for 13W Cool White Fixture								

PureWhite LED - FS2 STAMPED SERIES

Voltage:	12VAC
Wattage:	21W
Rating:	IP68
Color Temp:	Warm White (2700K) or Cool White (6500K)
Lumen Output:	Warm White: S2L = 1100lm Cool White: S2W = 1200lm
Beam Spread:	15° 25° 40° 120° Flood
LED Rating:	50,000 hrs
Dimming:	Non-Dimming
Material:	316 Stamped Stainless Steel Construction
Hardware:	316 Stainless Steel



Cable Strain Relief:	Nickel Plated Brass
Overheat Protection:	Integrated thermal cut-off switch
Lens:	Impact resistant tempered glass (Clear)
Cable Length:	10' 30' 50' 100' 150'
Cable Type:	12/3 SJTW 105°C 300V Diam: 421"
Environment:	MUST BE SUBMERGED 2' min. 9' max.
Fixture Rotation:	140° (fixture rotation when base is bolted)
Light Swivel:	180° (when used with base)
Certification:	ETL listed for underwater applications
Warranty:	3 Year Limited Warranty

HOW TO BUILD A PART NUMBER

PART NUMBER EXAMPLE: LFF-S2L-12V-NB-SS									
PREFIX	MODEL #	VOLTAGE	BEAM ANGLE	FACEPLATE	BASE	CORD LENGTH	MATERIAL		
LFF	-	-	-	-	-	-	-		
	insert code into box	insert code into box	insert code into box	insert code into box	insert code into box	insert code into box	insert code into box		
	S2L for Warm White Fixture	120 for 120Volt 12 for 12Volt	12	WG for Rock Guard Option NG for No Guard Option	WB for Base Option NB for No Base Option	10' 30' 50' 100' 150'	SS		

PureWhite LED - FS2 CAST SERIES

Voltage:	120VAC or 12VAC
Wattage:	21W
Rating:	IP68
Color Temp:	Warm White (2700K) or Cool White (6500K)
Lumen Output:	Warm White: S2L = 1100lm Cool White: S2W = 1200lm
Beam Spread:	15° 25° 40° 120° Flood
LED Rating:	50,000 hrs
Dimming:	120V only - Contact J&J for instructions
Material:	Cast Bronze or Cast 316 Stainless Steel
Faceplate:	No Guard: Stamped, polished finish With Guard: Casted, matte finish
Hardware:	316 Stainless Steel



Cable Strain Relief:	Nickel Plated Brass
Overheat Protection:	Integrated thermal cut-off switch
Lens:	Impact resistant tempered glass (Clear)
Cable Length:	10' 30' 50' 100' 150'
Cable Type:	120V = 16/3 STW 105°C 600V Diam: 400" 12V = 12/3 SJTW 105°C 300V Diam: 421"
Environment:	MUST BE SUBMERGED 2' min. 9' max.
Fixture Rotation:	140° (fixture rotation when base is bolted)
Light Swivel:	180° (when used with base)
Certification:	ETL listed for underwater applications
Warranty:	3 Year Limited Warranty

HOW TO BUILD A PART NUMBER

PART NUMBER EXAMPLE: LFF-S2W-120-N2-WG-WB-50-CB									
PREFIX	MODEL #	VOLTAGE	BEAM ANGLE	FACEPLATE	BASE	CORD LENGTH	MATERIAL		
LFF	-	-	-	-	-	-	-		
	insert code into box	insert code into box	insert code into box	insert code into box	insert code into box	insert code into box	insert code into box		
	S2L for Warm White Fixture S2W for Cool White Fixture	120 for 120Volt 12 for 12Volt	N1 for 15° N2 for 25° N3 for 40° FL for 120°	WG	WB for Base Option NB for No Base Option	10' 30' 50' 100' 150'	CB for Cast Bronze CS for Cast 316 SS		

ColorSplash LED - FLSC STAMPED SERIES RGB

Voltage:	120VAC or 12VAC
Wattage:	Large: F1C = 33W (max) Small: S1C = 7W (max)
Rating:	IP68
Color Temp:	RGB
Lumen Output:	Large: F1C = 847lm (max) Small: S1C = 207lm (max)
Beam Spread:	120° Flood
LED Rating:	50,000 hrs
Dimming:	Non-Dimmable
Material:	316 Stamped Stainless Steel Construction
Faceplate:	No Guard: Stamped, polished finish With Guard: Casted, matte finish
Hardware:	316 Stainless Steel



Cable Strain Relief:	Nickel Plated Brass
Overheat Protection:	Integrated thermal cut-off switch
Lens:	Impact resistant tempered glass (frosted)
Cable Length:	10' 30' 50' 100' 150'
Cable Type:	120V = 16/3 STW 105°C 600V Diam: 400" 12V = 12/3 SJTW 105°C 300V Diam: 421"
Environment:	MUST BE SUBMERGED 2' min. 9' max.
Fixture Rotation:	140° (fixture rotation when base is bolted)
Light Swivel:	180° (when used with base)
Certification:	ETL listed for underwater applications
Warranty:	3 Year Limited Warranty

HOW TO BUILD A PART NUMBER

PART NUMBER EXAMPLE: LFF-S1C-12-WG-WB-50									
PREFIX	MODEL #	VOLTAGE	FACEPLATE	BASE	CORD LENGTH				
LFF	-	-	-	-	-				
	insert code into box	insert code into box	insert code into box	insert code into box	insert code into box	insert code into box	insert code into box		
	F1C for 33W RGB Fixture (Large) S1C for 7W RGB Fixture (Small)	120 for 120Volt 12 for 12Volt	WG for Rock Guard Option NG for No Guard Option	WB for Base Option NB for No Base Option	10' 30' 50' 100' 150'				

WET/DRY FOUNTAIN LUMINAIRES



PureWhite LED - FX2 CAST SERIES

Voltage:	120VAC or 12VAC
Wattage:	18W
Rating:	IP68
Color Temp:	Warm White (2700K) or Cool White (6500K)
Lumen Output:	Warm White: X2L = 874lm Cool White: X2W = 874lm
Beam Spread:	5°-25°-40°-120°-flood
LED Rating:	50,000 hrs
Dimming:	120V only - Contact JEJ for instructions
Material:	Cast Bronze or Cast 316 Stainless Steel
Hardware:	316 Stainless Steel

Cable Strain Relief:	Nickel Plated Brass
Overheat Protection:	Integrated thermal cut-off switch
Lens:	Impact resistant tempered glass (Clear)
Cable Length:	10' 30' 50' 100' 150'
Cable Type:	120W = 16/3 STW 105°C 600V Diam. 400"
Environment:	12V = 12/3 STW 105°C 300V Diam. 421"
Fixture Rotation:	MUST BE SUBMERGED 2" min. - 7" max.
Light Swivel:	180° (When used with base)
Certification:	ETL Listed for underwater applications
Warranty:	3 Year Limited Warranty

HOW TO BUILD A PART NUMBER

PART NUMBER EXAMPLE: LFF-X2L-120-WB-NG-CS

LED Fountain Light Fixture, 18W Warm White, 120V, 2.5" Optic, With Rock Guard, No Mounting Base, 50' Cord, Cast Bronze Body

PREFIX	MODEL #	VOLTAGE	BEAM ANGLE	FACEPLATE	BASE	CORD LENGTH	MATERIAL
LFF	insert code into box X2L for Warm White Fixture X2W for Cool White Fixture	120 for 120Volt 12 for 12Volt	insert code into box N1 for 15° N2 for 25° N3 for 40° FL for 120°	WG	WB for Base Option NB for No Base Option	insert code into box 10' 50' 100' 150'	insert code into box CB for Cast Bronze CS for Cast 316 SS

HOW TO BUILD A PART NUMBER

PART NUMBER EXAMPLE: LFF-F2CW-4-3W-RGB-WB-10

LED Fountain Light Fixture, 33W RGBW Cool White, 120V, With Rock Guard, With Mounting Base, 10' Cord

PREFIX	MODEL #	VOLTAGE	FACEPLATE	BASE	CORD LENGTH
LFF	insert code into box F2CW for 33W RGBW Warm (large) F2CW for 33W RGBW Cool White (large) F2CW for 58W RGBW Warm (large) F2CW for 58W RGBW Cool White (large) S2CW for 4W RGBW Warm White (small) S2CW for 4W RGBW Cool White (small)	120 for 120Volt 12 for 12Volt	insert code into box WG for Rock Guard Option NG for No Guard Option	insert code into box WB for Base Option NB for No Base Option	insert code into box 10' 50' 100' 150'

ColorSplash LED - FLSWC STAMPED SERIES RGB-W

Voltage:	120VAC or 12VAC
Wattage:	Large: F2CW & F2CW = 33W (max), Large: F2CW & F2CW = 58W (max) Small: S2CW & S2CW = 4W (max)
Rating:	IP68
Color Temp:	RGB-W: Warm White = 2700K Cool White = 6500K
Lumen Output:	Large: F2CW warm white pend. F2CW cool white = 1500lm (max) Small: S2CW warm white pend. F2CW cool white = 150lm (max)
Beam Spread:	120° Flood
LED Rating:	50,000 hrs
Dimming:	120V Flood
Material:	316 Stamped Stainless Steel Construction
Faceplate:	No Guard: Stamped, polished finish With Guard: Casted, matte finish
Hardware:	316 Stainless Steel

Cable Strain Relief:	Nickel Plated Brass
Overheat Protection:	Integrated thermal cut-off switch
Lens:	Impact resistant tempered glass (frosted)
Cable Length:	10' 30' 50' 100' 150'
Cable Type:	120W = 16/3 STW 105°C 600V Diam. 400"
Environment:	MUST BE SUBMERGED 2" min. - 7" max.
Fixture Rotation:	180° (When used with base)
Light Swivel:	180° (When used with base)
Certification:	ETL Listed for underwater applications
Warranty:	3 Year Limited Warranty

» hayward.com » 1-888-976-5567

[Pumps](#) » [Filters](#) » [Heaters](#) » [Sanitization](#) » [Automation](#) » [Lighting](#) » [Water Features](#) » [Cleaners](#) » [Safety](#)

Hayward, Hayward & Design, the H logo, J&J Electronics, the J&J Electronics logo, Color Splash, and Guardian are registered trademarks of Hayward Industries, Inc. © 2022 Hayward Industries, Inc.

LITJJB022

