


Welded Deck Mounted Stair Rail

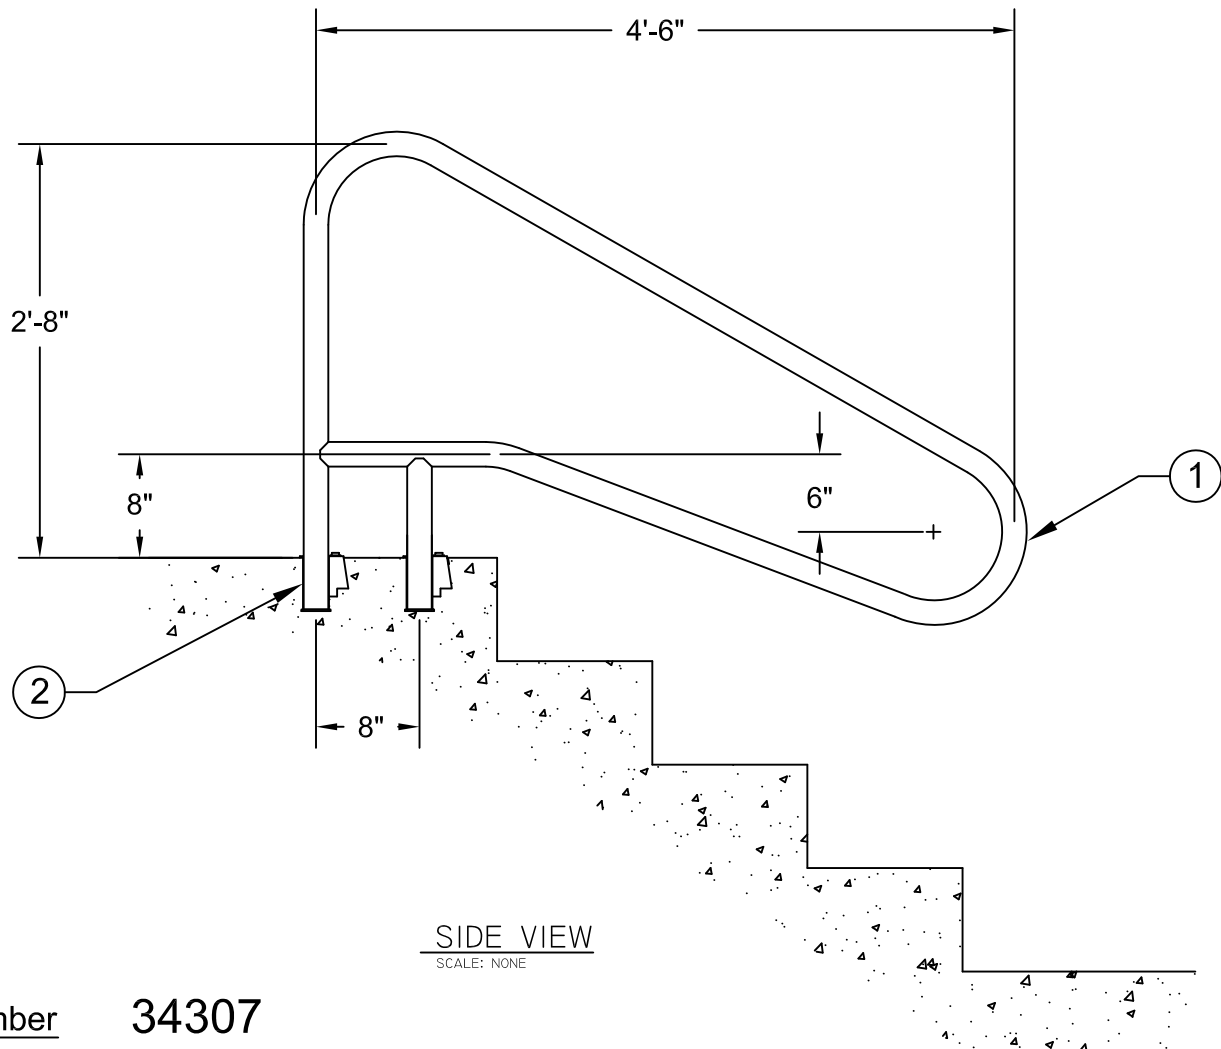

Part Number 34307

Specifications

- ① The stair rail shall be fabricated from one continuous length of tubing. The tubing shall be ASTM A-554 certified 1.90" OD x .065" wall thickness Type 304 stainless steel polished to a 320 grit finish. All bends shall be smooth and free of wrinkles.
- ② The stair rail shall be anchored in 4" deep bronze wedge anchor sockets (not included), which shall be fully imbeded in a concrete deck.

General

The stainless steel frame shall be electro-chemically passivated on all worked areas for maximum corrosion resistance. All hardware shall be 18-8 stainless steel. Custom designs and modifications are available upon request.

Supersedes specification sheet dated 10/94

The data represents the latest knowledge available to us at time of presentation. However, Paragon Aquatics and others involved in gathering and presenting this drawing assume no liability for its use.

© 2005 Paragon Aquatics



**PARAGON
AQUATICS**
Pentair Water

1351 Route 55
LaGrangeville, New York
12540
Phone: (845) 452-5500
Fax: (845) 452-5426
www.paragonaquatics.com

Drawn by: SAW	Date: 6/22/05	Approved by: SAW	Date: 6/22/05
Sheet Title:	Welded Deck Mounted Stair Rail		
Drawing Number: SS-SR20.64	Revision Letter: B	Sheet: 1 of 1	