

5.5 SERIES - 1/4 HP

APPLICATIONS

Basement sumps

FEATURES

- PSC motor with thermal overload protection
- Integral snap-action float switch
- 1-1/2" discharge
- 3/4" GHT (19mm) garden hose adapter included
- 120 °F (49 °C) liquid temperature rating
- cCSAus listed



SERIES SPECIFICATIONS


HP	Volts	Hz	Amps		Watts	Max. Water Temp.	Gallons per minute (Liters per minute) @ Height			Shut-Off	PSI / Bar
			FLA	Start			5'	10'	20'		
1/4	115	60	3.5	9	350	120F	35 (132)	30 (114)	10 (38)	25' (7.62 m)	10.8 / 0.69

Item No.	Model	HP	Volts	Switch Type / Operation	On Level	Off Level	Cord	Weight lbs (Kg)
505702	5.5-ASPA	1/4	115	Integral Snap-Action Float	7" - 10" 18 cm - 25 cm	2" - 5" 5 cm - 13 cm	10' (3 m)	10.25 (4.65 Kg)
505703	5.5-ASPA	1/4	115	Integral Snap-Action Float	7" - 10" 18 cm - 25 cm	2" - 5" 5 cm - 13 cm	25' (7.6 m)	11.5 (5.22 Kg)

SUMP PUMPS


5.5 SERIES - 1/4 HP

ENGINEERING DATA

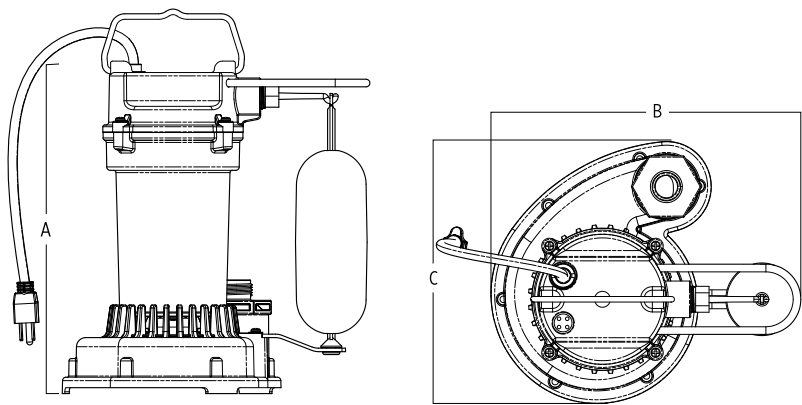


A	B	C
10.8" (27.48 cm)	10.4" (26.4 cm)	8.7" (22.1 cm)

TYPICAL INSTALLATION

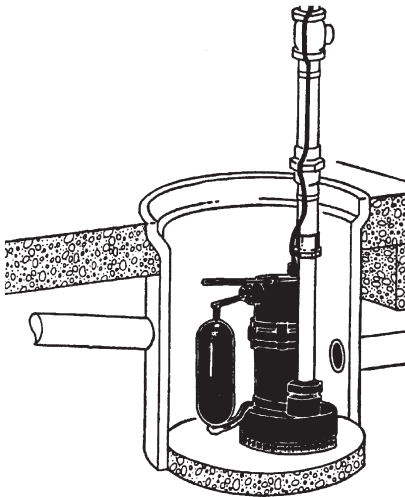

PERFORMANCE DATA

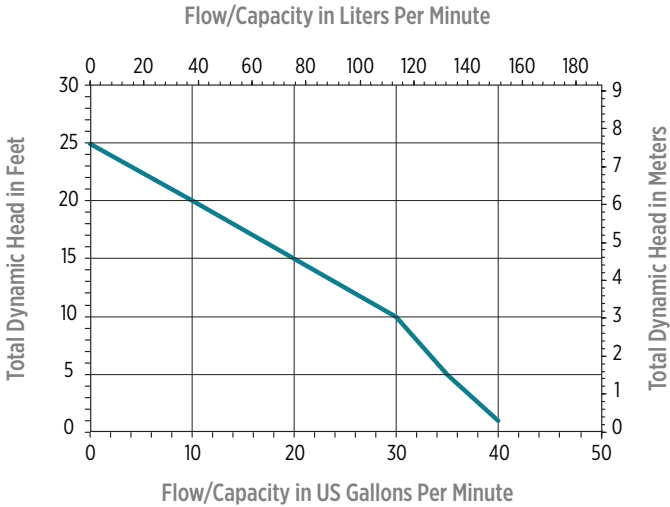

CONSTRUCTION

Motor Housing	Aluminum
Impeller Material	Nylon
Impeller Type	Non-clog
Volute	Polypropylene
Motor Shaft	440C SS
Shaft Seal	Mechanical
Fasteners	Stainless steel
Bearings	Upper and lower ball bearings
Power Cord	SJTW-A

