

SMALL SUBMERSIBLE

These pumps are designed for continuous circulation of statuary fountains. Made with some of the industry's most durable materials, these pumps reach peak performance when completely submerged.



FEATURES

- Oil-filled for cooling
- Prescreen included for protection
- Assorted options for every feature
- Rated for continuous duty




SERIES SPECIFICATIONS

Item No.	Model	Volts	Amps	Watts	Discharge MNPT	Gallons per hour (Liters per hour) @ Height					Shut-off	Cord
						1'	3'	5'	10'	15'		
501004	#1	115	1.1	70	0.25" (6.3 mm)	205 (776)	168 (636)	120 (454)	-	-	7.4' (2.25 m)	6' (1.8 m)
521204	1-MA	115	1.1	70	0.25" (6.3 mm)	170 (644)	140 (530)	100 (379)	-	-	7' (2.1 m)	6' (1.8 m)
502375	2EN-38N-WG	115	1.7	100	0.25" (6.3 mm)	300 (1136)	255 (965)	205 (776)	-	-	11.8' (3.5 m)	15' (4.5 m)
503375	3E-12N	115	3.2	220	0.5" (12.7 mm)	500 (1893)	435 (1647)	337 (1276)	210 (795)	65 (246)	17.3' (5.2 m)	15' (4.5 m)
523375	P-AAA	115	0.5	30	0.25" (6.3 mm)	120 (454)	70 (265)	-	-	-	4.6' (1.4 m)	15' (4.5 m)

DIMENSIONS

Dimensions (in)	A	B	C
#1	4.30	3.70	4.10
1-MA	4.30	3.30	3.50
2EN-38N-WG	4.64	3.50	5.55
3E-12N	5.50	4.50	7.00
P-AAA	3.90	3.90	3.00

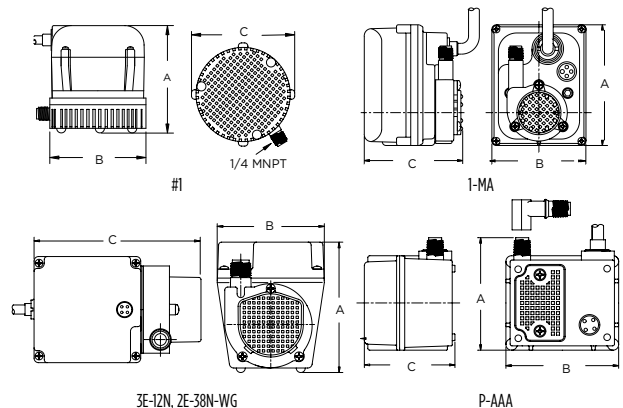

PERFORMANCE

