

2E-38N SERIES - 1/40 HP

APPLICATIONS

Dual purpose oil-filled pump that may be used totally submersed or in-line (fed with pipe or hose). For commercial, industrial and home applications including statuary fountains, water displays, air conditioners, machine tool coolants, and many other applications where liquid must be transferred or recirculated.

FEATURES

- For submersed or in-line use
- Epoxy coated die-cast aluminum housing
- Oil-filled motor
- 11.8-foot maximum lift
- Snap-on pre-filter screen
- 1/4-inch MNPT discharge (accepts 1/2-inch I.D. tubing)
- Thermal overload protection



2E-38N




SERIES SPECIFICATIONS

Item No.	Model	Discharge	Listing	HP	Volts	Hz	Amps	Watts	Gallons per hour (Liter per hour) @ Height				Shut-Off	PSI	Cord	Weight lbs (Kg)
									1'	3'	5'	10'				
502203	2E-38N	1/4" MNPT	UL	1/40	115	60	1.7	100	300 (1136)	255 (965)	205 (776)	70 (265)	11.8' (3.6 m)	5.1	6' (1.8 m)	4.67 (2.12 Kg)
502403	2E-38N	1/4" MNPT	UL	1/40	115	60	1.7	100	300 (1136)	255 (965)	205 (776)	70 (265)	11.8' (3.6 m)	5.1	6' (1.8 m)	4.67 (2.12 Kg)
502216	2E-38NY	1/4" MNPT	UL	1/40	230	60	0.9	100	300 (1136)	255 (965)	205 (776)	70 (265)	11.8' (3.6 m)	5.1	12' (3.7 m)	4.67 (2.12 Kg)
502286	2E-38NT	1/4" MNPT	UL	1/40	115	60	1.7	100	300 (1136)	255 (965)	205 (776)	70 (265)	11.8' (3.6 m)	5.1	10' (3 m)	4.67 (2.12 Kg)
502375	2E-38N-WG	1/4" MNPT	UL	1/40	115	60	1.7	100	300 (1136)	255 (965)	205 (776)	70 (265)	15' (4.6 m)	5.1	15' (4.6 m)	4.67 (2.12 Kg)


SMALL SUBMERSIBLE PUMPS

2E-38N SERIES - 1/40 HP

ENGINEERING DATA

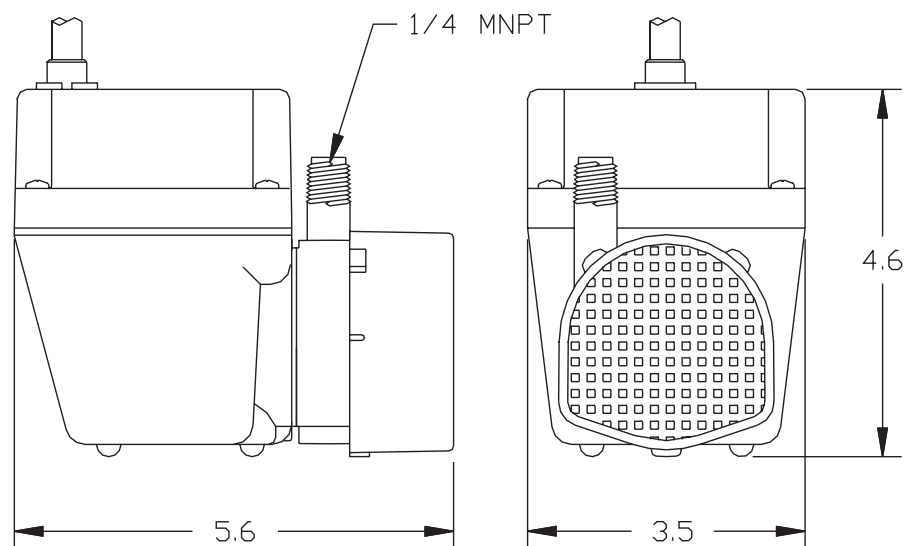

PERFORMANCE DATA

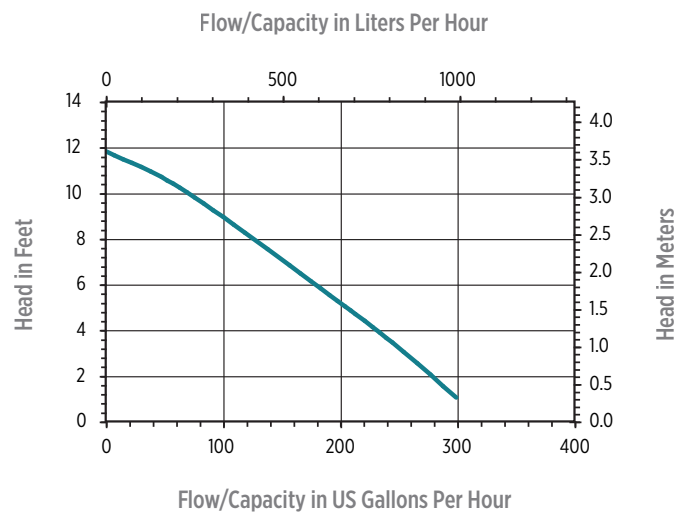

REPLACEMENT PARTS

Volute	102334 (102375, black)
Impeller	102470
Screen	102909 (102376, black)
Gasket	102601