

Product Image




Conduit Bodies with Cover & Gasket

C style conduit bodies are designed to allow for easy access to the interior of a raceway for wire pulling and splicing. They are compatible with both IMC and Rigid Conduit and feature a removable cover and gasket for maintenance work.

Features:

- Tapered threaded hubs- NPT or NPSM
- Wet locations

Product Dimensions

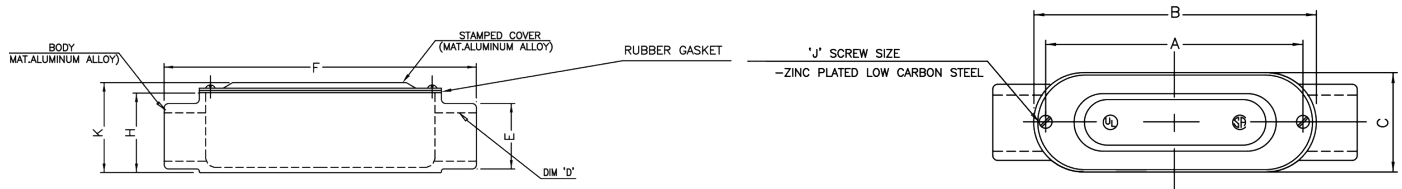

PN	Size	'A'	'B'	'C'	'D' Thread Size	'E'	'F'	'J' Cover Screw Size & Length	'H'	'K' Total Ht.	Min Vol. CU. IN	Max Wire Size Used
Die Cast												
C50CG	1/2"	3.50	3.86	1.31	1/2" NPT	1.06	4.82	NO. 8 x 7/16" L	1.42	1.58	4.35	-
C75CG	3/4"	4.13	4.65	1.54	3/4" NPT	1.28	5.50	NO. 8 x 7/16" L	1.65	1.81	7.30	#6 AWG
C100CG	1"	4.81	5.37	1.75	1" NPT	1.56	6.22	NO. 8 x 7/16" L	1.91	2.07	12.20	3#4 AWG
C125CG	1-1/4"	6.50	7.24	2.48	1-1/4" NPT	1.85	8.27	NO. 12 x 1/2" L	2.68	2.84	33.40	3#2 AWG
C150CG	1-1/2"	6.50	7.24	2.48	1-1/2" NPT	2.24	8.27	NO. 12 x 1/2" L	2.68	2.84	33.50	3#1/0 AWG
C200CG	2"	8.56	9.45	3.13	2" NPT	2.91	10.24	NO. 12 x 1/2" L	3.43	3.59	69.50	3#2/0 AWG
C250CG	2-1/2"	11.25	12.20	4.44	2-1/2" NPSM	3.30	13.46	NO. - .31 x 1/2" L	3.93	4.17	159	3#250 MCM
C300CG	3"	11.25	12.20	4.44	3" NPSM	3.99	13.46	NO. - .31 x 1/2" L	4.52	4.76	188	3#250 MCM
Sand Cast												
C350CG	3-1/2"	13.75	14.88	5.43	3-1/2" NPSM	4.69	15.83	NO. - .31 x 1/2" L	5.51	5.75	307	3#300 MCM
C400CG	4"	13.75	14.88	5.43	4" NPSM	5.25	15.83	NO. - .31 x 1/2" L	5.51	5.75	309	3#300 MCM