



A6B1-4W-27K-A
A6B1-4W-30K-A
A6B1-8W-27K-A
A6B1-8W-30K-A

Adjustable Beam Spread
Path Light Module with 18" Riser
Brass



SPECIFICATIONS

Fixture Type	Fixture Components	Fixture Material	Fixture Style	Watts	Color Temperature	Finish
A (Area)	6 (Integrated Modular Variable)	Brass	1 (Brass Stem w/ Module)	4W 8W	27K (2700K) 30K (3000K)	A (Antiqued)

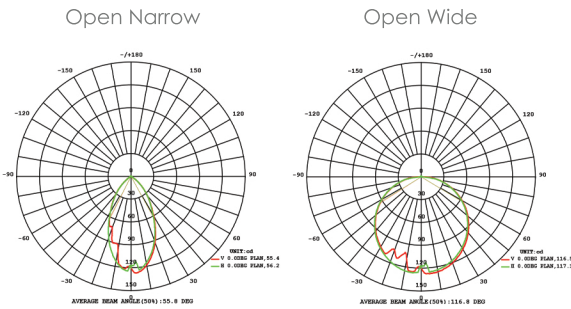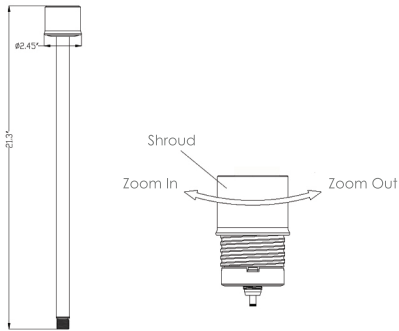

Construction: Brass
Finish: Antique Brush
Lead Wire: 6ft long
Mounting: LAP-002
Light Source: Modular LED
Wattage: 4W or 8W
Operating Voltage: 10-15V
Lumens: 230LM or 450 LM
Color Temperature: 2700K or 3000K
Volt Amps: 5.58 - 11.9
RGB: No
CRI: 80+
Rated Life: 50,000 Hrs
Dimmable: Primary Dimming Capable

APPLICATION

Environment: Wet, Damp or Dry Area approved.
Installation: Mounts to our 12" Spike (LAP-001) or 8" Spike (LAP-002)

ACCESSORIES



WARRANTY

Lifetime Year Warranty on the Housing,
10 Year Warranty on the LED Light Source

CERTIFICATION

UL Listed I File #E501872

Lumien Lighting reserves the right to modify the design of our products at any time and data listed on spec sheets is subject to change.