

**D5A2-15W-27K-BZ**  
**D5A2-15W-30K-BZ**



**D5A2-15W-27K-BK**  
**D5A2-15W-30K-BK**

Standard Dimming  
Spot Light  
Black or Bronze Aluminum



## SPECIFICATIONS

Fixture Type	Fixture Components	Fixture Material	Fixture Style	Watts	Color Temperature	Finish
D (Directional)	5 (Integrated Variable)	A (Aluminum)	2 (Down)	15W	27K (2700K) 30K (3000K)	BZ (Bronze) BK (Black)

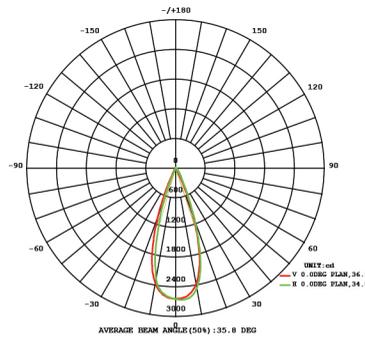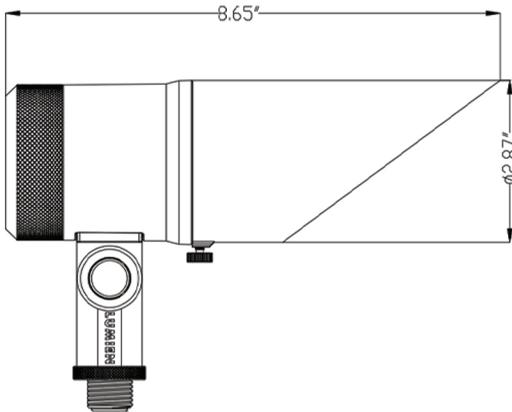

Construction: Aluminum  
Finish: Powder Coat Bronze or Black  
Lead Wire: 30ft long  
Light Source: Integrated LED  
Wattage: 15W  
Operating Voltage: 10-15V  
Lumens: 1000 LM  
Beam Spread: 40°  
Color Temperature: 2700K or 3000K  
Volt Amps: 16.12  
RGB: No  
CRI: 80+  
Rated life: 50,000 Hrs  
Dimmable: Primary Dimming Capable

## APPLICATION

Environment: Wet, Damp or Dry Area approved.

Other Optic Lenses Available (Ordered Separately):

LAP-010 (15\* Beam Spread)

LAP-012 (60\* Beam Spread)

## ACCESSORIES



LAA-004



LAA-007



LAA-002



TR-120

## WARRANTY

10 Year Warranty on the Housing,  
10 Year Warranty on the LED Light Source

## CERTIFICATION

UL Listed I File #E501872

Lumien Lighting reserves the right to modify the design of our products at any time and data listed on spec sheets is subject to change.