



M4B5-5.5W-27K-R  
M4B5-5.5W-30K-R

Micro Short Shroud  
Underwater Light  
Micro Full Assemblies



SPECIFICATIONS

Fixture Type	Fixture Components	Fixture Material	Fixture Style	Watts	Color Temperature	Finish
M (Micro)	4 (Integrated Modular)	B (Brass)	5 (UWS)	5.5W	27K (2700K) 30K (3000K)	R (Raw)

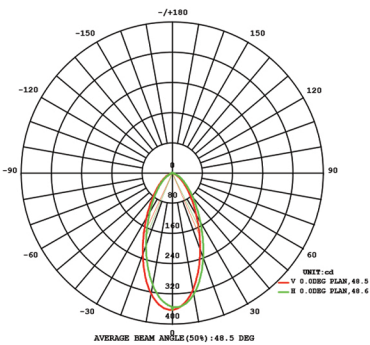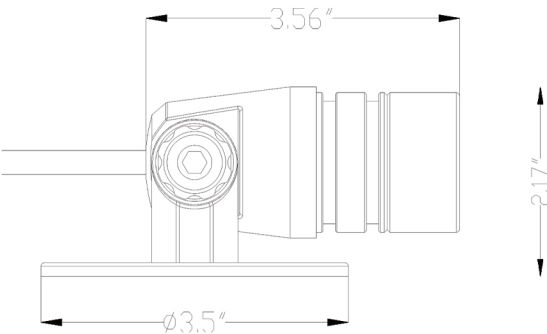

Construction: Brass  
Finish: Raw  
Lead Wire: 30ft long  
Mounting: Underwater Mount  
Light Source: Modular LED  
Wattage: 5.5W  
Operating Voltage: 10-15V  
Lumens: 346 LM  
Color Temperature: 2700K, 3000K  
Volt Amps: 8.11  
RGB: No  
CRI: 80+  
Rated Life: 50,000 Hrs  
Dimmable: Primary Dimming Capable

APPLICATION

Environment: Wet, Damp or Dry Area approved.

ACCESSORIES



TR-120



LAB-027-R



M4B1-3.5W-27K-R



M4B1-3.5W-30K-R

WARRANTY

Lifetime Warranty on the Housing,  
10 Year Warranty on the LED Light Source

CERTIFICATION

UL Listed I File #E501872

Lumen Lighting reserves the right to modify the design of our products  
at any time and data listed on spec sheets is subject to change.