

LumienCORE




N4B1-2.5W-27K-15-A
N4B1-2.5W-30K-15-A
N4B1-2.5W-27K-30-A
N4B1-2.5W-30K-30-A

Nano Module
IP68 Rated (waterproof)



SPECIFICATIONS

Fixture Type	Fixture Components	Fixture Material	Fixture Style	Watts	Color Temperature	Beam Spread	Finish
N (Nano)	4 (Integrated Modular)	B (Brass)	1 (ML)	2.5W (2.5W)	27K (2700K) 30K (3000K)	15° 30°	A (Antiqued)

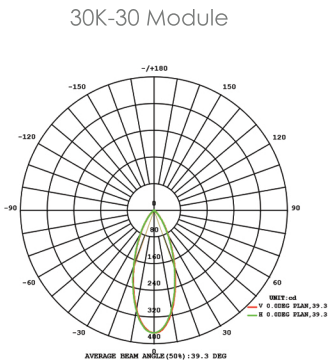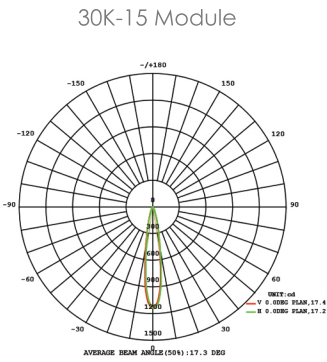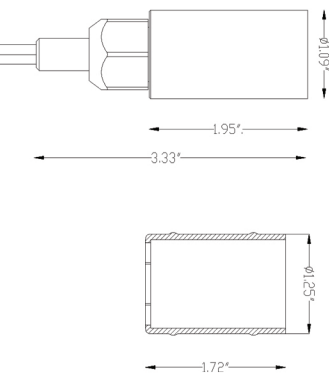

Construction: Brass
Finish: Antique Brush
Lead Wire: 6ft long
Light Source: Modular LED
Wattage: 2.5W
Operating Voltage: 10-15V
Lumens: 250 LM
Beam Spread: 15° & 30°
Color Temperature: 2700K or 3000K
Volt Amps: 3.97
RGB: No
CRI: 80+
Rated Life: 50,000 Hrs
Dimmable: Primary Dimming Capable

ACCESSORIES



LAB-118



LAB-146



LAB-119



LAB-115

WARRANTY

Lifetime Warranty on the Housing,
10 Year Warranty on the LED Light Source

CERTIFICATION

UL Listed I File #E501872

Lumien Lighting reserves the right to modify the design of our products at any time and data listed on spec sheets is subject to change.