




REV	ECO	REV BY	DATE	APPD	DATE
F	0030713	A.NAJERA	02-05-2013	J. DE LUNA	02-05-2013

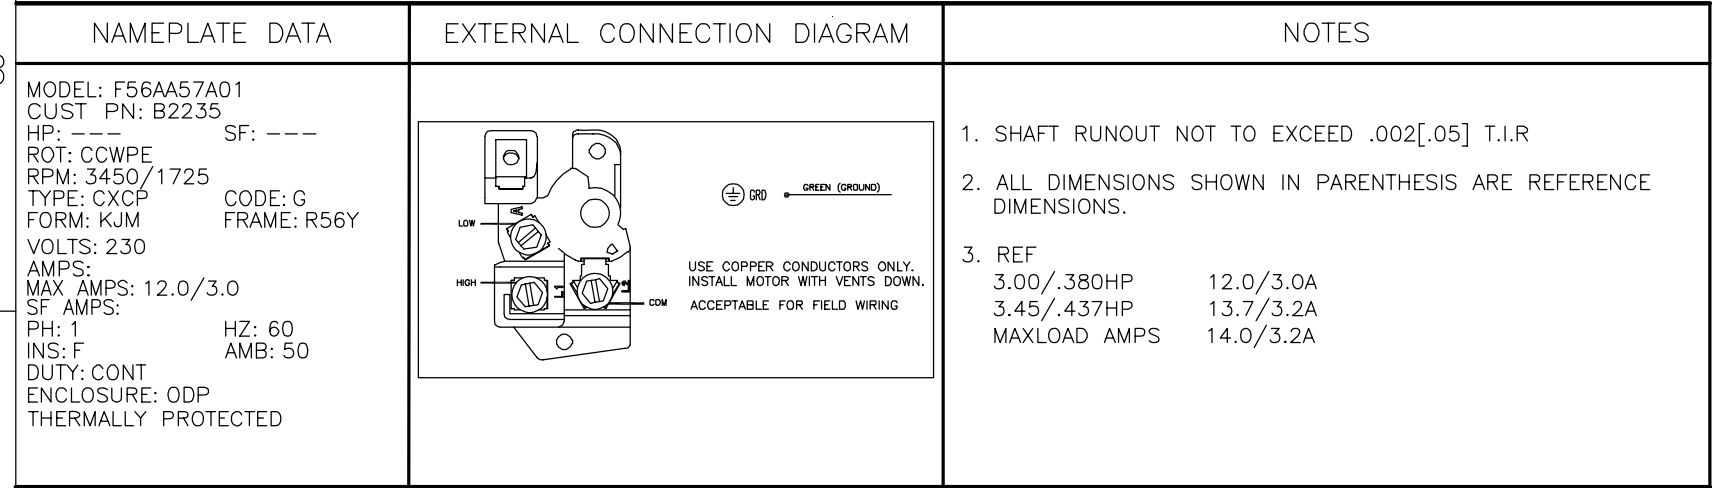

PERFORMANCE CURVE		APPROVED SAMPLE		GEOMETRIC CHARACTERISTICS & SYMBOLS		UNLESS OTHERWISE SPECIFIED DIM. TOLERANCES ARE AS FOLLOWS:		DR BY: BL 02-08-2010		 REGAL-BELOIT CORPORATION	
0116783		CSR-0000479		□ FLATNESS — STRAIGHTNESS ∠ ANGULARITY ⊥ PERPENDICULARITY (SQUARENESS) // PARALLELISM ○ ROUNDNESS (CIRCULARITY) ⌀ CYLINDRICITY △ PROFILE OF ANY SURFACE ∩ PROFILE OF ANY LINE ↗ RUNOUT ⊕ TRUE POSITION ⊙ CONCENTRICITY ≡ SYMMETRY		INCH X XX XXX XXXX ±.1 ±.02 ±.005 ±.0005 mm ±0.5 ±0.13 ±0.013 ANG. ±50 DEG REMOVE BURRS & BREAK SHARP EDGES: INCH .003-.015 mm 0.1-0.4 CORNER FILLETS TO: INCH .020 mm 0.5 MACHINE SURFACES: INCH 125 mm 3.2		APPD: TZ 02-08-2010 THIRD ANGLE PROJECTION  EDS DATE 11-11-2011 FORMAT REV H		DESCRIPTION	
UL COMPONENT		CSA								MODEL- PFHP-56FR OUTLINE	
FILE#	CCN#	FILE#	GUIDE#							SIZE C DWG NO B2235	
E25022	XEWR2	LR43341	4211-01							SCALE NONE SHEET 1	
CUSTOMER		DISTRIBUTION		ASME Y14.5M 1994		METRIC DIMS. SHOWN IN [BRACKETS]					
								CONFIDENTIAL: THIS DRAWING AND ITS INFORMATION ARE THE EXCLUSIVE AND CONFIDENTIAL PROPERTY OF REGAL-BELOIT CORPORATION AND ARE NOT TO BE DISCLOSED, DUPLICATED, DISTRIBUTED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF REGAL-BELOIT CORPORATION. -ALL RIGHTS RESERVED.			

REVISION:	ECO	REVISADO POR:	FECHA:	APROBADO POR:	FECHA:
F	0030713	A.NAJERA	02-05-2013	J. DE LUNA	02-05-2013

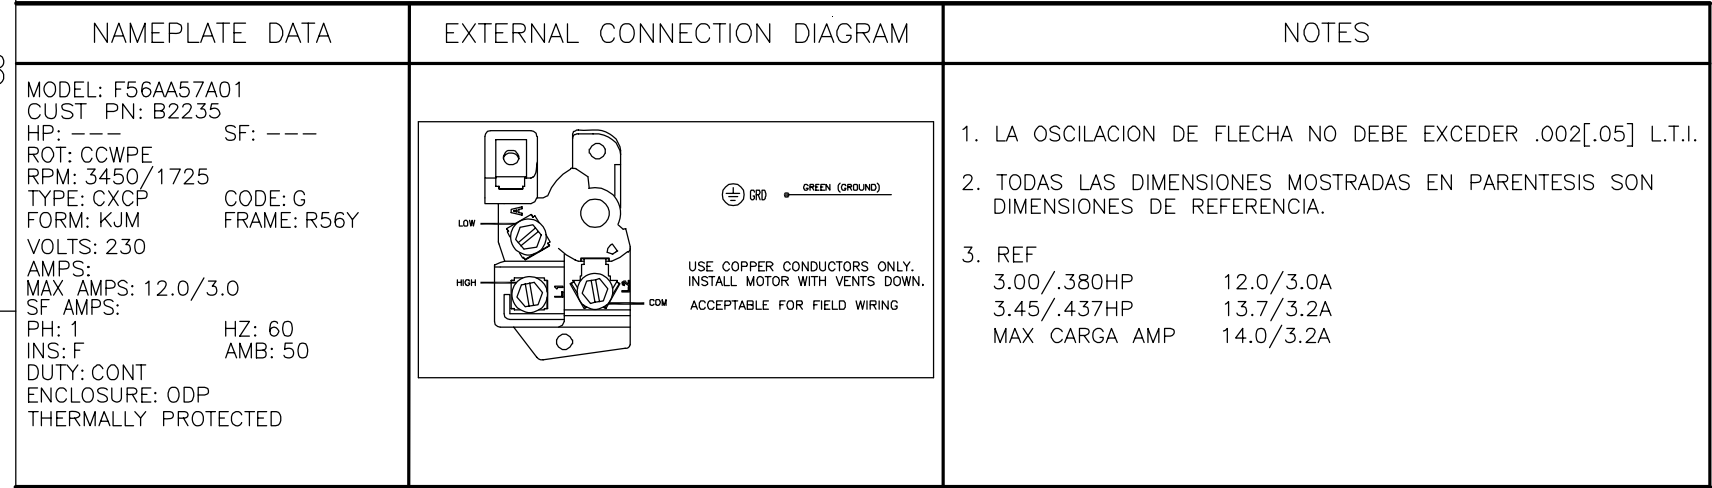

PERFORMANCE CURVE		APPROVED SAMPLE		CARACTERISTICAS DE GEOMETRIA Y SIMBOLOS		A MENOS QUE SE ESPECIFIQUE DE OTRA MANERA, LAS TOLERANCIAS DE LAS DIMS; SON LAS SIGUIENTES:		DIBUJADO POR: BL		02-08-2010		REGAL REGAL-BELOIT CORPORATION					
0116783		CSR-0000479		□ PLANICIDAD — RECTITUD ∠ ANGULARIDAD ⊥ PERPENDICULARIDAD (A ESCUADRA) // PARALELISMO ○ REDONDEZ (CIRCULARIDAD) ∅ CILINDRICIDAD △ PERFIL DE CUALQUIER SUPERFICIE ▽ PERFIL DE CUALQUIER LINEA ↗ VARIACION ⊕ POSICION REAL ⊙ CONCENTRICIDAD = SIMETRIA		PULG ±.1 ±.02 ±.005 ±.0005 mm ±0.5 ±0.13 ±0.013 ANG. ±50 GRADOS ELIMINAR REBABAS Y ORILLAS FILOSAS DEL BORDE. PULG .003-.015 mm 0.1-0.4 FILETEAR ESQUINA: PULG .020 mm 0.5 MAQUINAR SUPERFICIES PULG 125 mm 3.2		APROBADO POR: TZ		02-08-2010		DESCRIPCION:					
UL COMPONENT		CSA						TERCER ANGULO DE PROYECCION				FECHA EDS: 11-11-2011		MODEL- PFHP-56FR OUTLINE			
FILE#		CCN#		FILE#		GUIDE#		DE PROYECCION				REV. FORMATO: H				TAMAÑO: C	
E25022		XEWR2		LR43341		4211-01								ESCALA: NONE		HOJA: 1	
CUSTOMER		DISTRIBUTION		ASME Y14.5M 1994		DIMS METRICAS MOSTRADAS [PARENTESIS]											