






REV	ECO	REV BY	DATE	APPD	DATE
C	0025533	E.SINECIO	04-25-2012	R.RASCON	04-25-2012




TOP OF
NON SVRS STICKER
ABOVE OF SERIAL STICKER

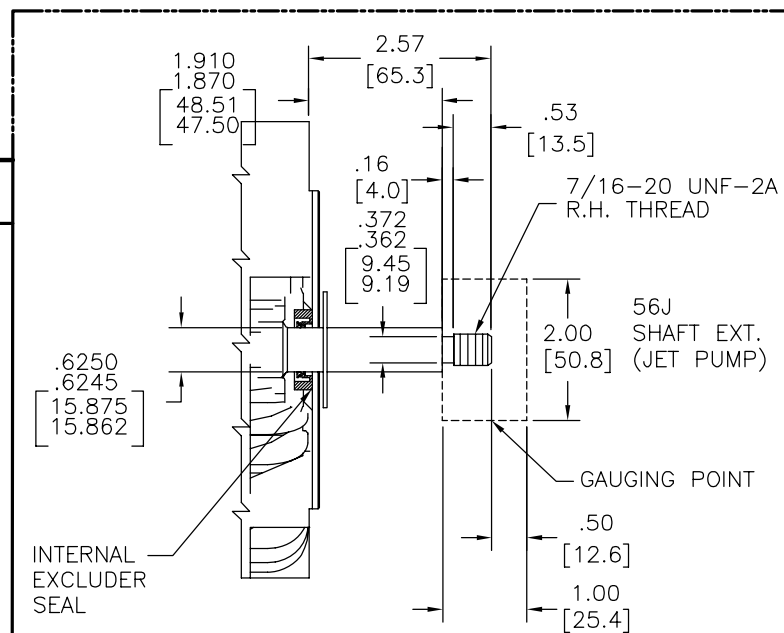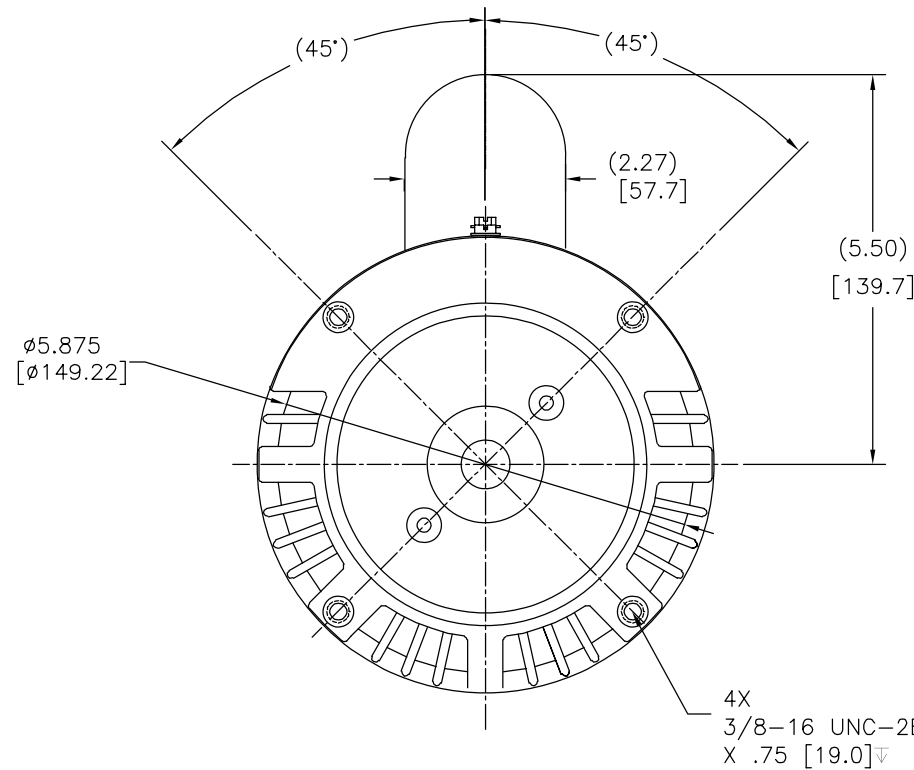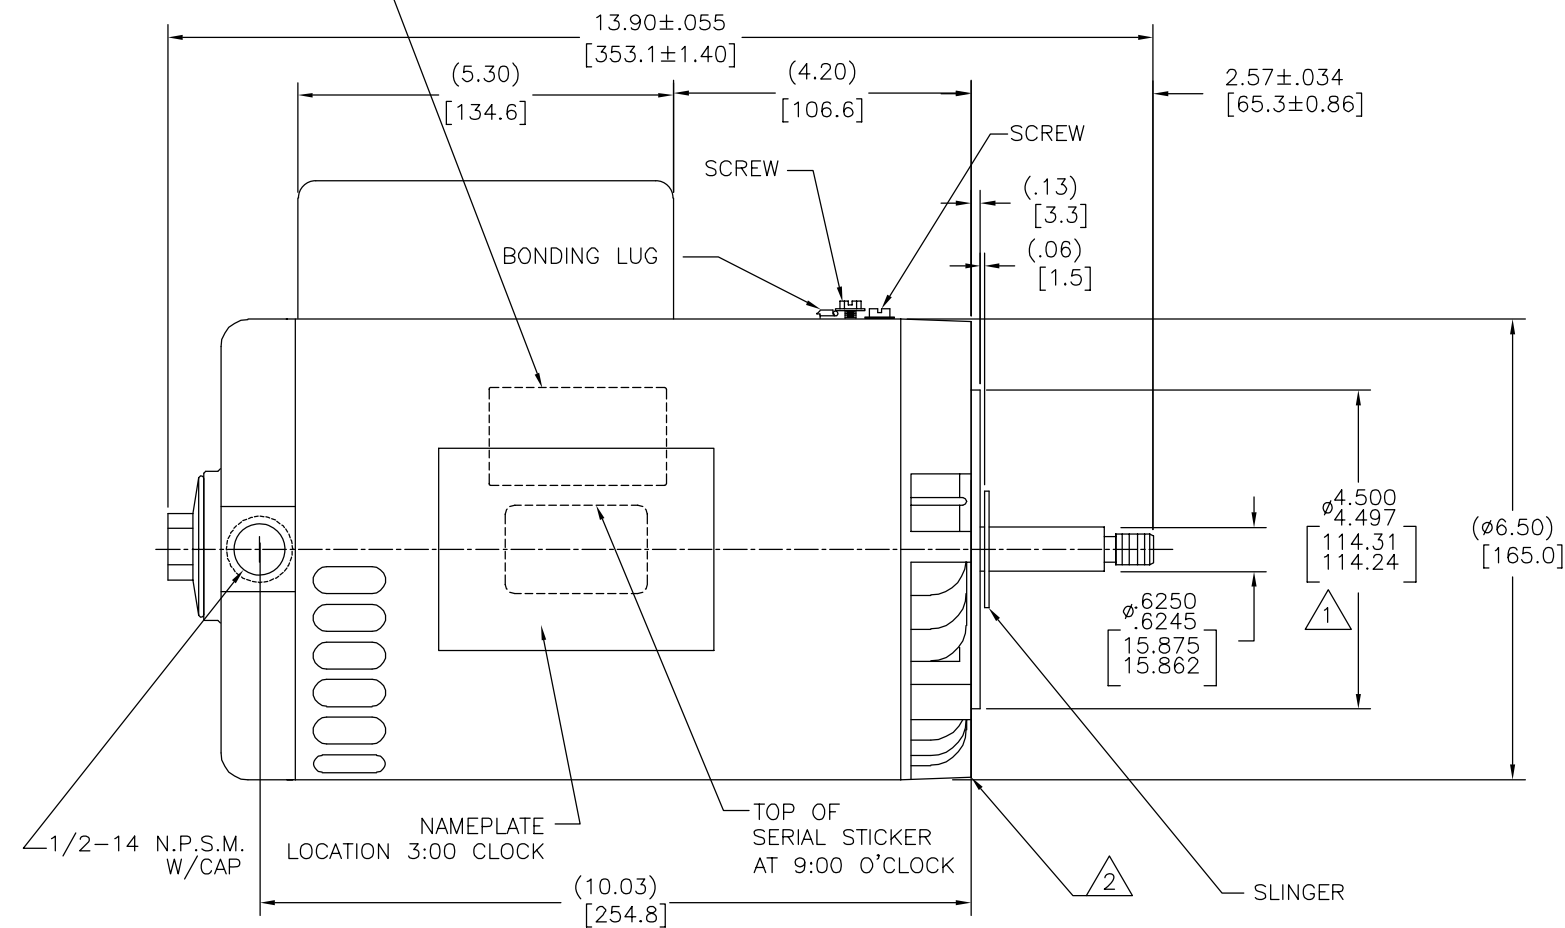

NAMEPLATE DATA	EXTERNAL CONNECTION DIAGRAM	NOTES
MODEL: 164728 CUST PN: B836 HP: 2.0 SF: 1.20 ROT: CCWPE RPM: 3450 TYPE: CX CODE: G FORM: FRAME: Y 56 J VOLTS: 230/115 AMPS: SF 10.8/21.6 MAX AMPS: ----- SF AMPS: ----- PH: 1 HZ: 60 INS: B AMB: 50°C DUTY: CONT ENCLOSURE: ODP THERMALLY PROTECTED	<p>LOW VOLTAGE</p> <p>BROWN—B</p> <p>WHITE—L1 LINE</p> <p>WHITE—L2 LINE</p> <p>A</p> <p>HIGH VOLTAGE</p> <p>WHITE—B</p> <p>L1 LINE</p> <p>L2 LINE</p> <p>BROWN—A</p> <p>NON-REVERSIBLE</p>	<p>1 PILOT DIAMETER IS CONCENTRIC WITH SHAFT CENTERLINE WITHIN .004[.10] T.I.R.</p> <p>2 FACE OF MOUNTING FLANGE IS PERPENDICULAR TO SHAFT CENTERLINE WITHIN .004[.10] T.I.R.</p> <p>3 SHAFT RUNOUT NOT TO EXCEED .002[.05] T.I.R.</p> <p>4 END PLAY NOT TO EXCEED .010[.25] MEASURED WITH NO THRUST</p> <p>5 ALL DIMENSIONS SHOWN IN PARENTHESIS ARE REFERENCE DIMENSIONS.</p>



PERFORMANCE CURVE		APPROVED SAMPLE		<div>GEOMETRIC CHARACTERISTICS & SYMBOLS □ FLATNESS — STRAIGHTNESS ∠ ANGULARITY ⊥ PERPENDICULARITY (SQUARENESS) // PARALLELISM ○ ROUNDNESS (CIRCULARITY) ⌀ CYLINDRICITY △ PROFILE OF ANY SURFACE ⌒ PROFILE OF ANY LINE ↑ RUNOUT ⊕ TRUE POSITION ◎ CONCENTRICITY ≡ SYMMETRY</div> <div>ASME Y14.5M 1994</div>		<div>UNLESS OTHERWISE SPECIFIED DIM. TOLERANCES ARE AS FOLLOWS: INCH X XX XXX XXXX ±.1 ±.02 ±.005 ±.0005 mm ±0.5 ±0.13 ±0.013 ANG. ±.50 DEG REMOVE BURRS & BREAK SHARP EDGES: INCH .003-.015 mm 0.1-0.4 CORNER FILLETS TO: INCH .020 mm 0.5 MACHINE SURFACES: INCH 125 mm 3.2</div> <div>METRIC DIMS. SHOWN IN [BRACKETS]</div>		DR BY: AS 10-21-2010		<div>REGAL-BELOIT CORPORATION</div>	
16367411		-----						APPD: TZ 10-21-2010			
UL COMPONENT		CSA						THIRD ANGLE PROJECTION  EDS DATE 02-22-2008 FORMAT REV G			
FILE#	CCN#	FILE#	GUIDE#					CONFIDENTIAL: THIS DRAWING AND ITS INFORMATION ARE THE EXCLUSIVE AND CONFIDENTIAL PROPERTY OF REGAL-BELOIT CORPORATION AND ARE NOT TO BE DISCLOSED, DUPLICATED, DISTRIBUTED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF REGAL-BELOIT CORPORATION. -ALL RIGHTS RESERVED.			
E14663	XEWR2	LR4642	4211-01					DESCRIPTION		MODEL-CFHP-56FR OUTLINE	
CUSTOMER		DISTRIBUTION						SIZE C		DWG NO B836	
								SCALE NONE		SHEET 1	

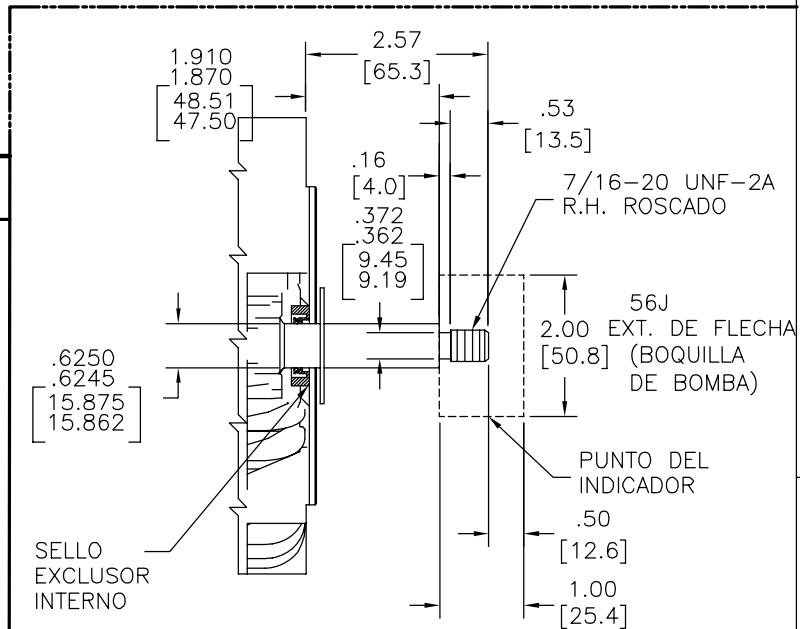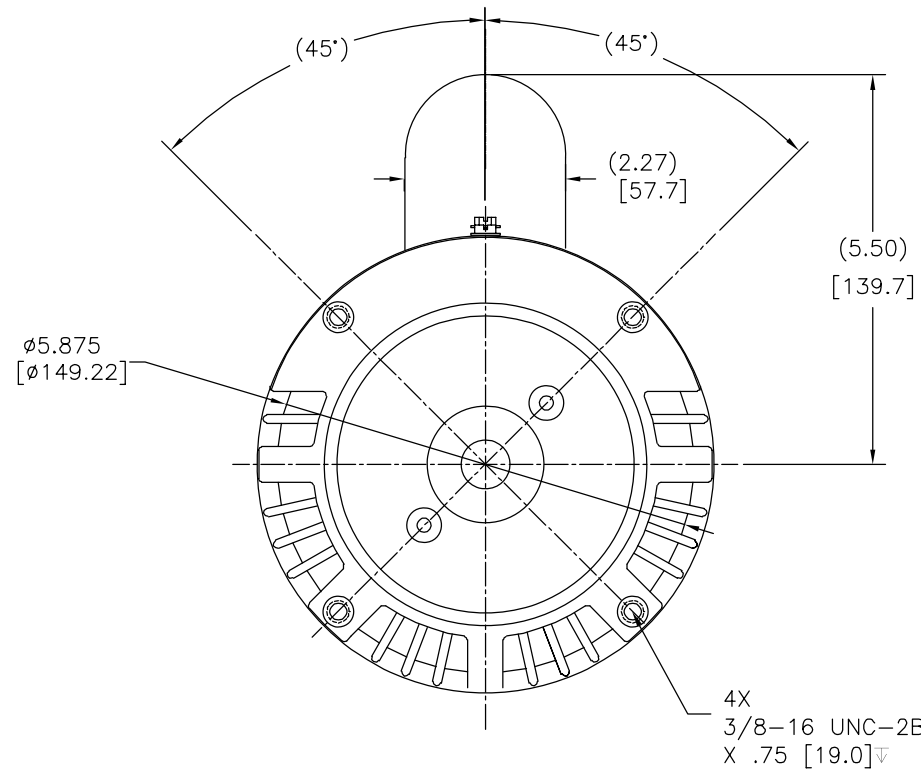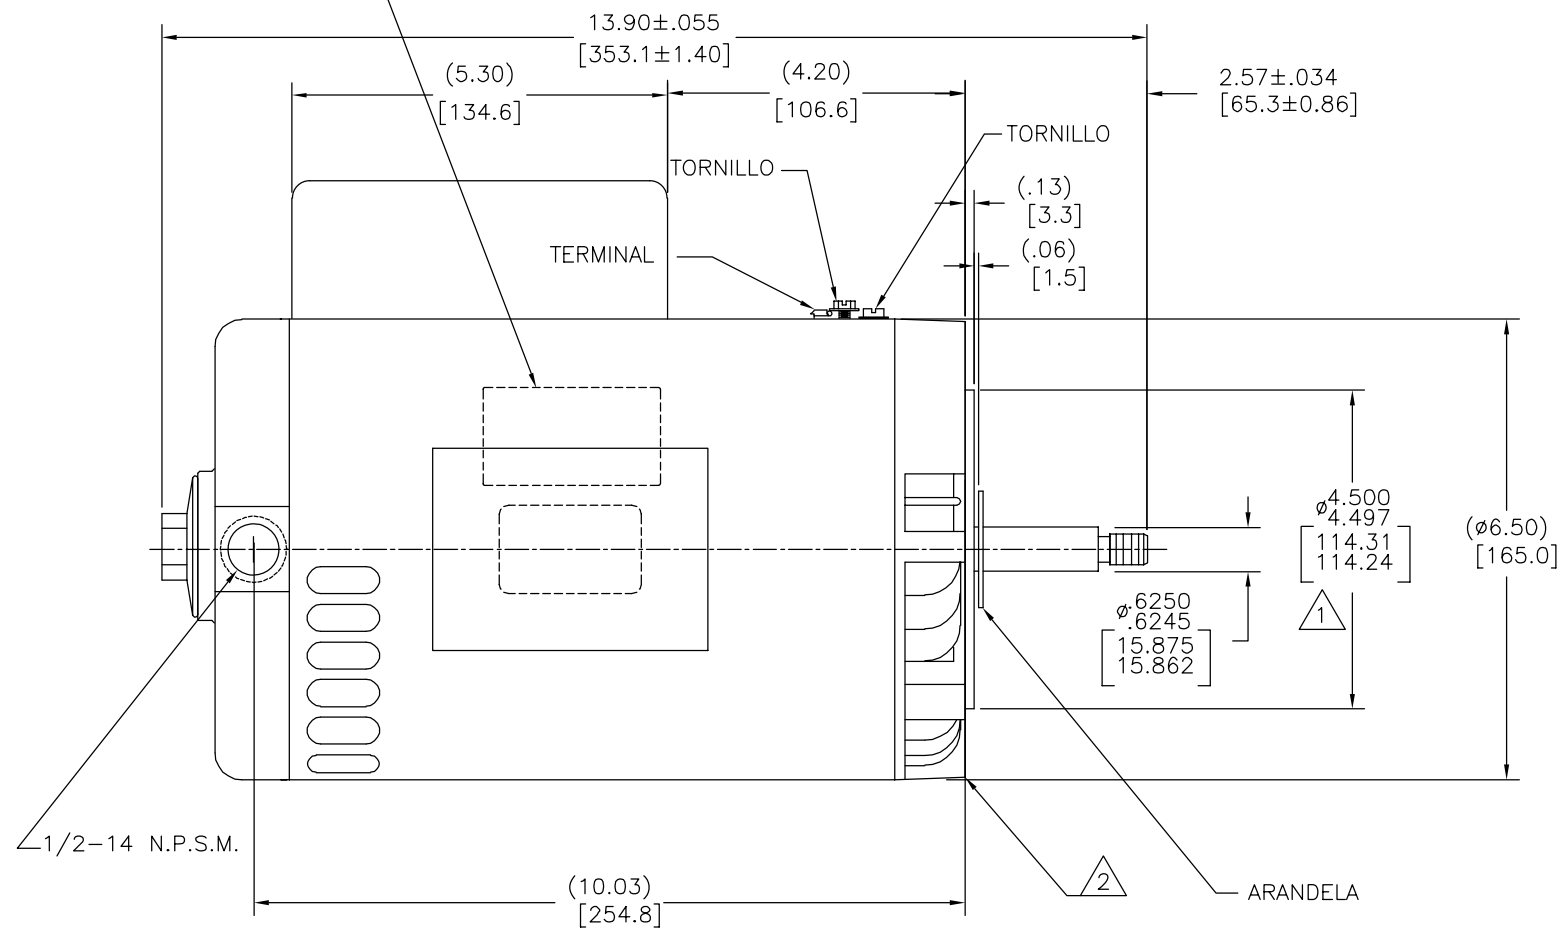

REVISION:	ECO	REVISADO POR:	FECHA:	APROBADO POR:	FECHA:
C	0025533	E.SINECIO	04-25-2012	R.RASCON	04-25-2012



NAMEPLATE DATA	EXTERNAL CONNECTION DIAGRAM	NOTES
MODEL: 164728 CUST PN: B836 HP: 2.0 SF: 1.20 ROT: CCWPE RPM: 3450 TYPE: CX CODE: G FORM: FRAME: Y 56 J VOLTS: 230/115 AMPS: SF 10.8/21.6 MAX AMPS: ----- SF AMPS: ----- PH: 1 HZ: 60 INS: B AMB: 50°C DUTY: CONT ENCLOSURE: ODP THERMALLY PROTECTED	<p>LOW VOLTAGE BROWN—B WHITE—L1 LINE WHITE—L2 LINE A NON-REVERSIBLE</p> <p>HIGH VOLTAGE WHITE—B L1 LINE L2 LINE BROWN—A</p>	NOTAS: 1. EL DIAMETRO GUIA ES CONCENTRICO A LA LINEA DE CENTRO DE LA FLECHA DENTRO DE .004[.10] L.T.I 2. LA CARA DEL REBORDE ES PERPENDICULAR A LA LINEA DE CENTRO DE LA FLECHA DENTRO DE .004[.10] L.T.I 3. LA OSCILACION DE LA FLECHA NO DEBE EXEDER DE .002[.05] L.T.I 4. NO EXCEDER .010[.25] DE JUEGO AXIAL MEDIDO SIN PRESIONAR 5. TODAS LAS DIMENSIONES MOSTRADAS EN PARENTESIS SON DIMENSIONES DE REFERENCIA.

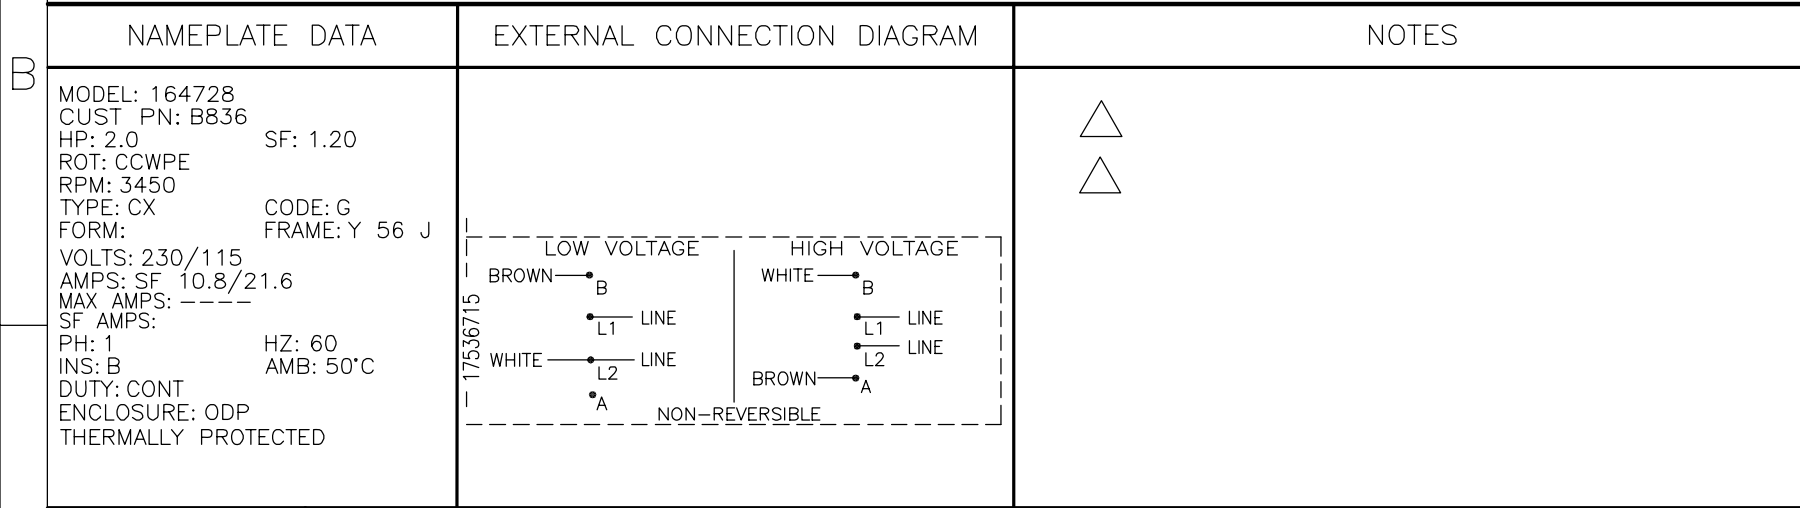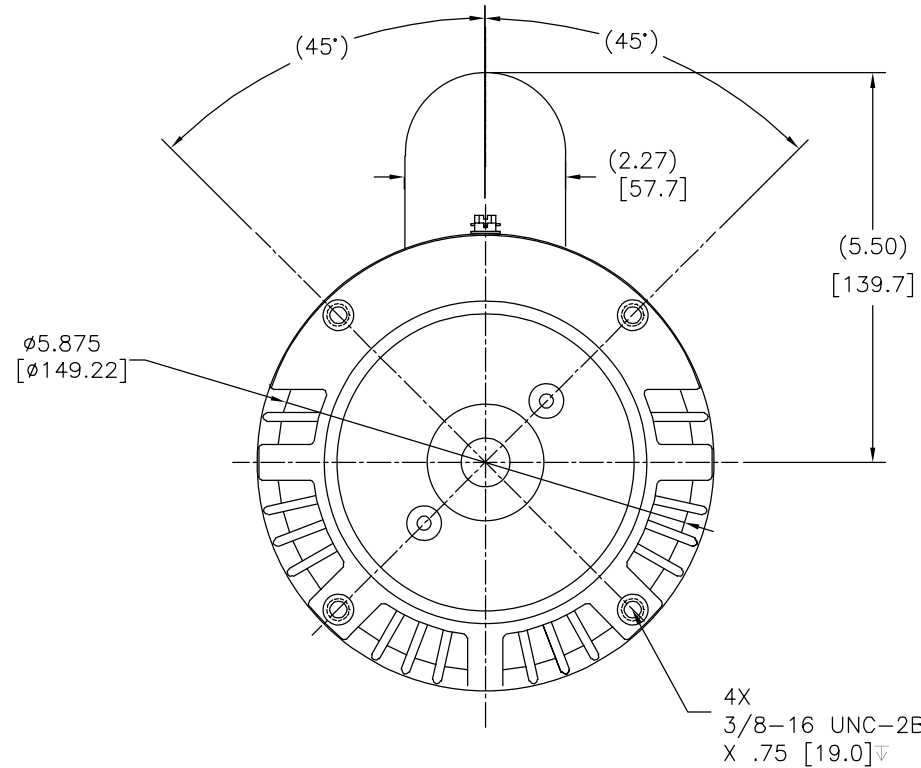PERFORMANCE CURVE	APPROVED SAMPLE	CARACTERISTICAS DE GEOMETRIA Y SIMBOLOS	A MENOS QUE SE ESPECIFIQUE DE OTRA MANERA, LAS TOLERANCIAS DE LAS DIMS: SON LAS SIGUIENTES:	DIBUJADO POR: AS	10-21-2010	 DESCRIPCION: MODEL-CFHP-56FR OUTLINE TAMAÑO: C NUMERO DE DIBUJO: B836 ESCALA: NONE HOJA: 1
16367411	-----	✓ PLANICIDAD — RECTITUD ∠ ANGULARIDAD ⊥ PERPENDICULARIDAD (A ESCUADRA) // PARALELISMO ○ REDONDEZ (CIRCULARIDAD) ⊘ CILINDRICIDAD △ PERFIL DE CUALQUIER SUPERFICIE ▽ PERFIL DE CUALQUIER LINEA ↑ VARIACION ⊕ POSICION REAL ◎ CONCENTRICIDAD ≡ SIMETRIA	PULG ±.1 ±.02 ±.005 ±.0005 mm ±0.5 ±0.13 ±0.013 ANG. ± 50 GRADOS ELIMINAR REBABAS Y ORILLAS FILOSAS DEL BORDE. PULG .003-.015 mm 0.1-0.4 FILETEAR ESQUINA: PULG .020 mm 0.5 MAQUINAR SUPERFICIES PULG 125 mm 3.2	APROBADO POR: TZ	10-21-2010	
UL COMPONENT	CSA	ASME Y14.5M 1994	DIMS METRICAS MOSTRADAS [PARENTESIS]	TERCER ANGULO DE PROYECCION	FECHA EDS: 02-22-2008 REV. FORMATO: G	
FILE#	CCN#	FILE#	GUIDE#	CONFIDENCIAL: ESTE DIBUJO Y SU INFORMACION SON PROPIEDAD DE USO EXCLUSIVO Y CONFIDENCIAL DE REGAL-BELOIT CORPORATION. Y NO DEBERAN SER REVELADOS, DUPLICADOS, DISTRIBUIDOS O USARSE DE OTRA MANERA SIN EL CONSENTIMIENTO ESCRITO DE REGAL-BELOIT CORPORATION. -TODOS LOS DERECHOS RESERVADOS.		
E14663	XEWR2	LR4642	4211-01			
CUSTOMER	DISTRIBUTION					



PERFORMANCE CURVE		APPROVED SAMPLE		<div>形位公差 □ 平面度 — 直线度 ∠ 倾斜度 ⊥ 垂直度 // 平行度 ○ 圆度 ⊙ 圆柱度 △ 面轮廓度 ∇ 线轮廓度 ! 圆跳动 ⊕ 位置度 ◎ 同轴度 ≡ 对称度</div> <div>除另有注明 尺寸公差如下: 英寸 X ±.1 XX ±.02 XXX ±.005 XXXX ±.0005 毫米 ±0.5 ±0.13 ±0.013 角度 ±.50 度 清理毛刺和尖棱 英寸 .003-.015 毫米 0.1-0.4 内圆角 英寸 .020 毫米 0.5 表面粗糙度 英制 125 米制 3.2</div> <div>ASME Y14.5M 1994</div> <div>米制尺寸显示在 []</div>	绘图: AS 10-21-2010		<div> REGAL-BELOIT CORPORATION</div> <div>名称 MODEL-CFHP-56FR OUTLINE</div> <div>图幅 C 图号 B836</div> <div>比例 NONE 页号 1</div>
16367411		-----			批准: TZ 10-21-2010		
UL COMPONENT		CSA			第三角投影  图纸格式发布日期 02-22-2008 图纸格式版本 G		
FILE#	CCN#	FILE#	GUIDE#		机密: 本图纸及相关信息所有权归REGAL-BELOIT CORPORATION. 未经REGAL-BELOIT CORPORATION书面授权, 不得泄露、 复制、传播或作其他用途。一版权所有		
E14663	XEWR2	LR4642	4211-01				
CUSTOMER		DISTRIBUTION					