



REV	ECO	REV BY	DATE	APPD	DATE
E	0025356	J.M.Ramirez	04-12-2012	R.Rascon	04-12-2012

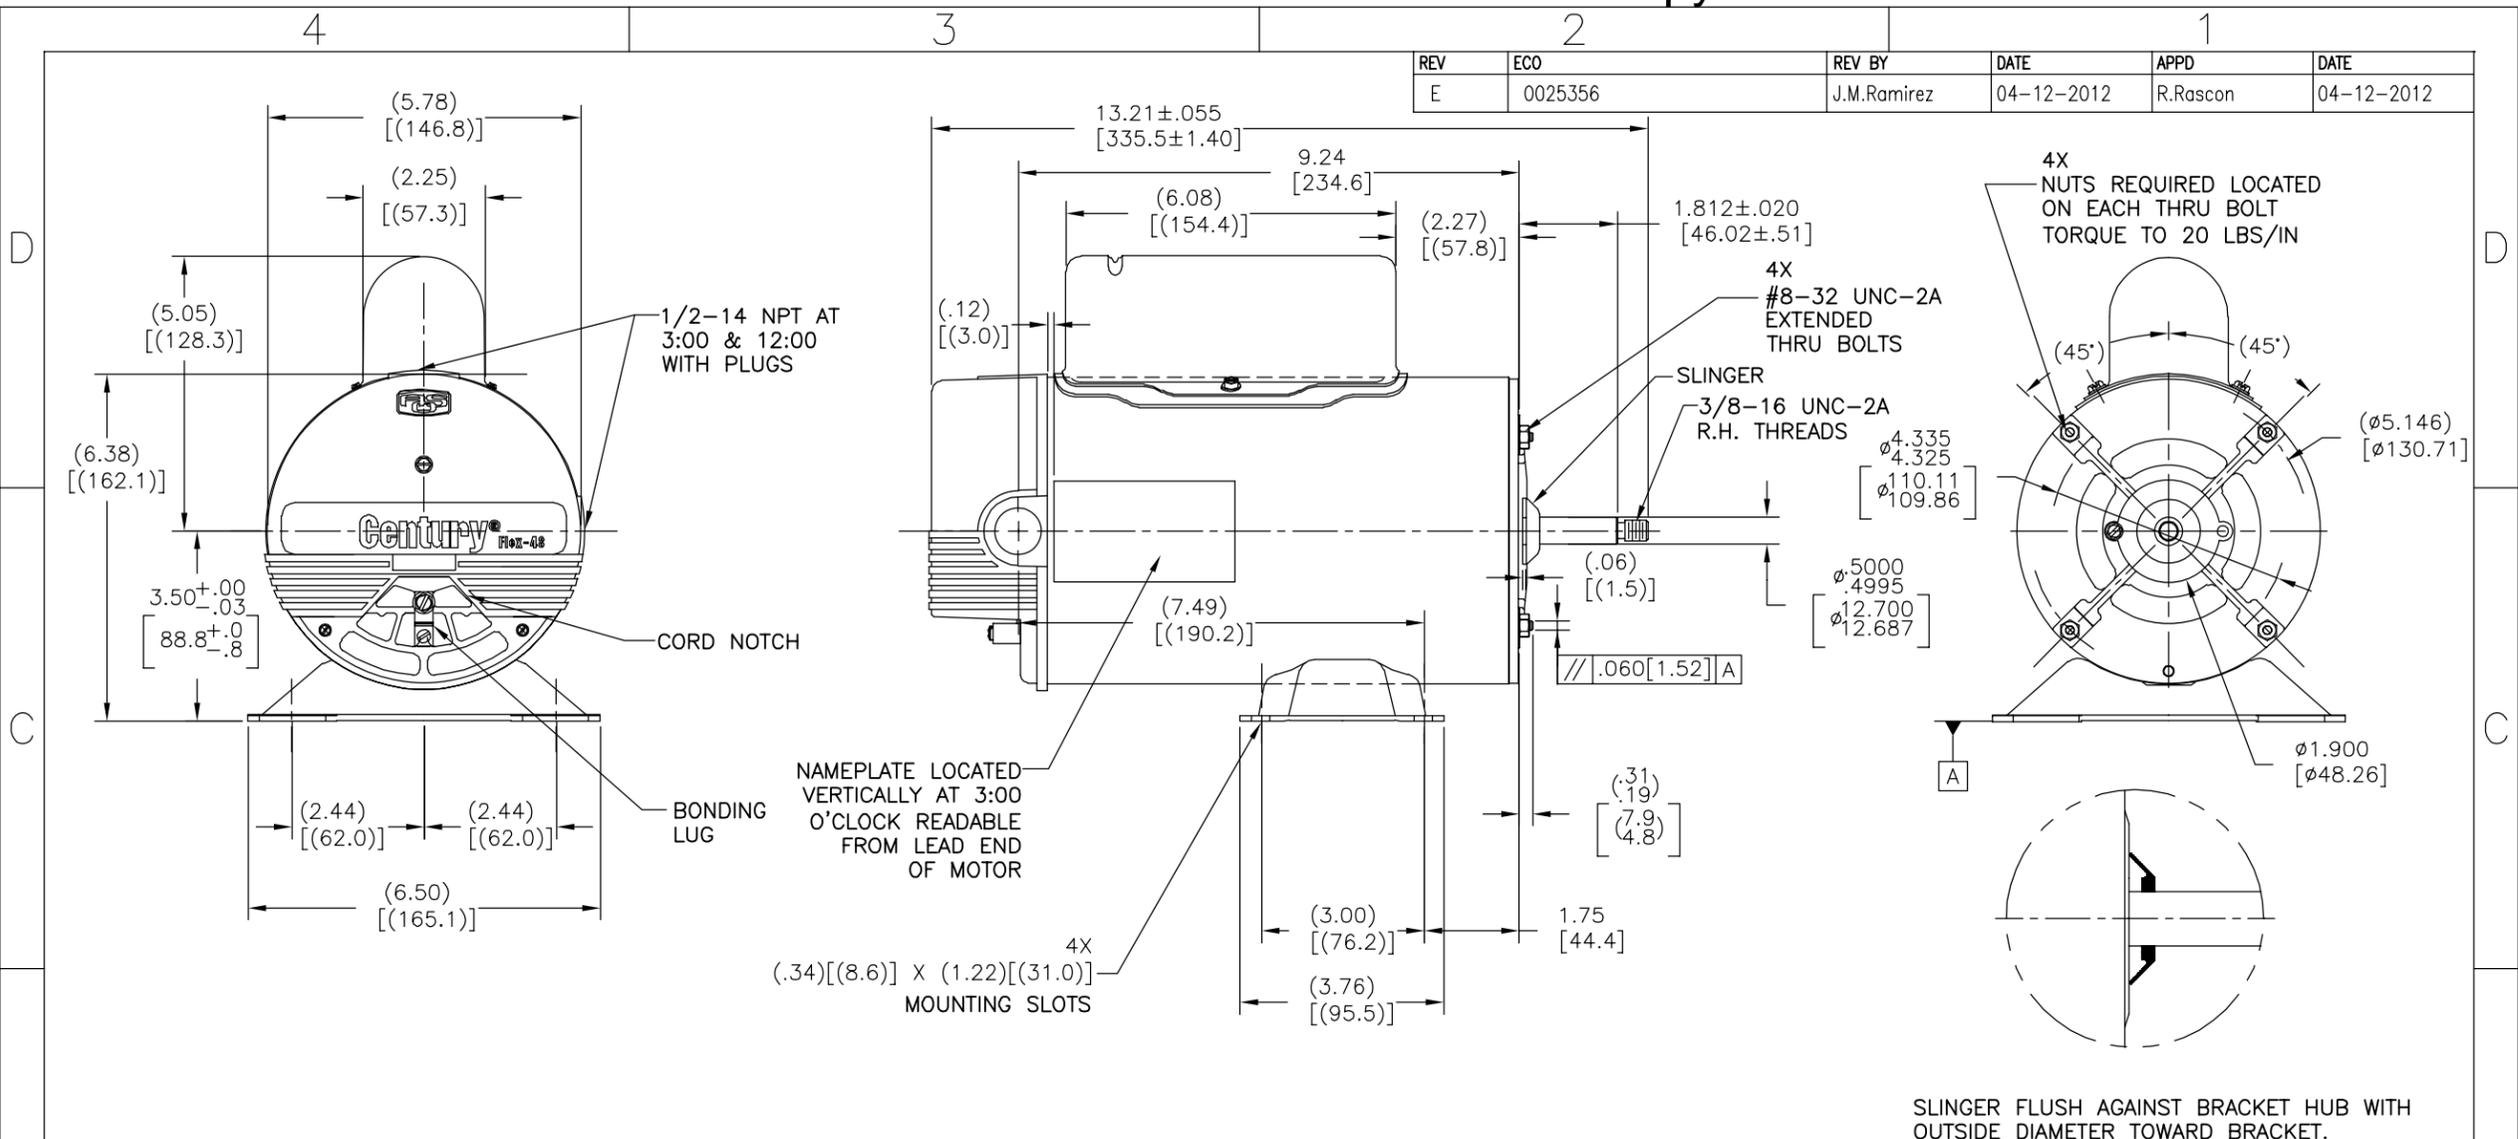


NAMEPLATE DATA	EXTERNAL CONNECTION DIAGRAM	NOTES
MODEL: F48AD44A01 CUST PN: BN34V1 HP: 1.5/.188 SF: 1.0 ROT: CCWPE RPM: 3450/1725 TYPE: C/F CODE: F FORM: FRAME: 48Y VOLTS: 230 AMPS: 6.5/2.5 MAX AMPS: SF AMPS: PH: 1 HZ: 60 INS: B AMB: 40 DUTY: CONT ENCLOSURE: ODP THERMALLY PROTECTED	<p> ⊕ GRD ● GREEN (GROUND) 1 ● HIGH SPEED 5 ● COMMON 6 ● LOW SPEED </p>	1. LEAD END FRAME TO BE ORIENTED TO DRIVE END FRAME TO WITHIN $\pm 2'$ 2. ALL DIMENSIONS SHOWN IN PARENTHESIS ARE REFERENCE DIMENSIONS.

<table border="1"> <tr> <th>PERFORMANCE CURVE</th> <th>APPROVED SAMPLE</th> </tr> <tr> <td>F48M2W1</td> <td>0802264BP2</td> </tr> <tr> <th>UL COMPONENT</th> <td>CSA</td> </tr> <tr> <th>FILE#</th> <th>CCN#</th> <th>FILE#</th> <th>GUIDE#</th> </tr> <tr> <td>PENDING</td> <td>PENDING</td> <td>PENDING</td> <td>PENDING</td> </tr> <tr> <th>CUSTOMER</th> <td colspan="3">DISTRIBUTION</td> </tr> </table>	PERFORMANCE CURVE	APPROVED SAMPLE	F48M2W1	0802264BP2	UL COMPONENT	CSA	FILE#	CCN#	FILE#	GUIDE#	PENDING	PENDING	PENDING	PENDING	CUSTOMER	DISTRIBUTION			GEOMETRIC CHARACTERISTICS & SYMBOLS □ FLATNESS — STRAIGHTNESS ∠ ANGULARITY ⊥ PERPENDICULARITY (SQUARENESS) ∥ PARALLELISM ○ ROUNDNESS (CIRCULARITY) ∅ CYLINDRICITY △ PROFILE OF ANY SURFACE ∩ PROFILE OF ANY LINE ↑ RUNOUT ⊕ TRUE POSITION ⊙ CONCENTRICITY ≡ SYMMETRY ASME Y14.5M 1994	UNLESS OTHERWISE SPECIFIED DIM. TOLERANCES ARE AS FOLLOWS: INCH X XX XXX XXXX ±.1 ±.02 ±.005 ±.0005 mm ±0.5 ±0.13 ±0.013 ANG. ±.50 DEG REMOVE BURRS & BREAK SHARP EDGES: INCH .003-.015 mm 0.1-0.4 CORNER FILLETS TO: INCH .020 mm 0.5 MACHINE SURFACES: INCH 125 mm 3.2 METRIC DIMS. SHOWN IN [BRACKETS]	DR BY: JZ 11-29-2010 APPD: SH 11-29-2010 THIRD ANGLE PROJECTION EDS DATE 11-11-2011 FORMAT REV G CONFIDENTIAL: THIS DRAWING AND ITS INFORMATION ARE THE EXCLUSIVE AND CONFIDENTIAL PROPERTY OF REGAL-BELOIT CORPORATION AND ARE NOT TO BE DISCLOSED, DUPLICATED, DISTRIBUTED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF REGAL-BELOIT CORPORATION. -ALL RIGHTS RESERVED.	REGAL-BELOIT CORPORATION DESCRIPTION: OUTLINE SIZE: C DWG NO: BN34V1 SCALE: NONE SHEET: 1
PERFORMANCE CURVE	APPROVED SAMPLE																					
F48M2W1	0802264BP2																					
UL COMPONENT	CSA																					
FILE#	CCN#	FILE#	GUIDE#																			
PENDING	PENDING	PENDING	PENDING																			
CUSTOMER	DISTRIBUTION																					

REVISION: ECO	REVISADO POR: J.M.Ramirez	FECHA: 04-12-2012	APROBADO POR: R.Rascon	FECHA: 04-12-2012
E	0025356			

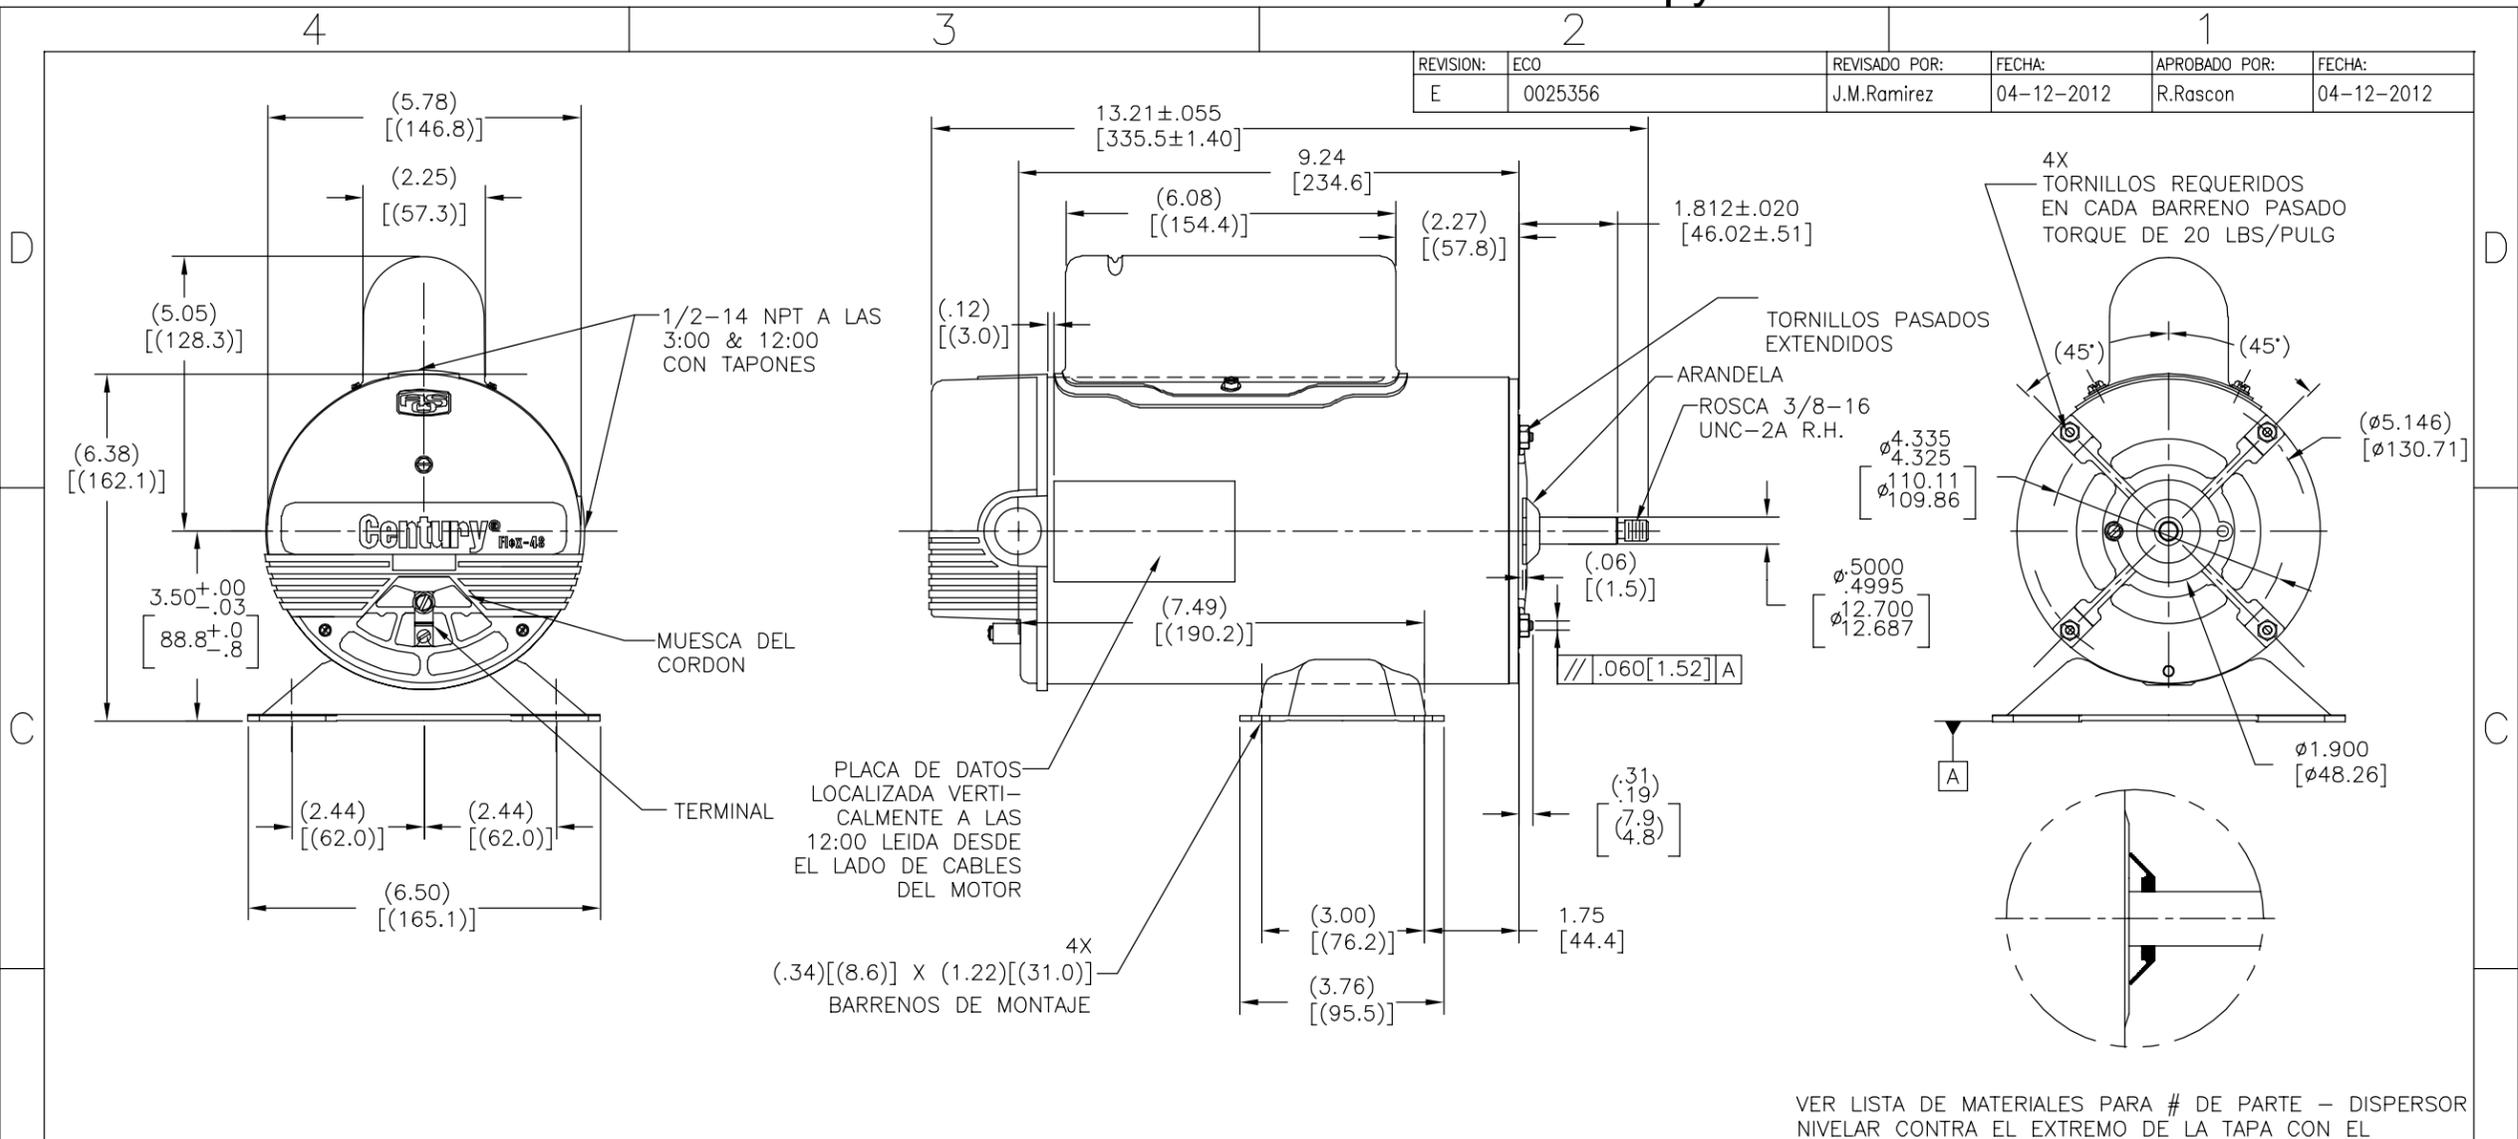


VER LISTA DE MATERIALES PARA # DE PARTE - DISPERSOR NIVELAR CONTRA EL EXTREMO DE LA TAPA CON EL DIAMETRO EXTERNO HACIA LA TAPA.

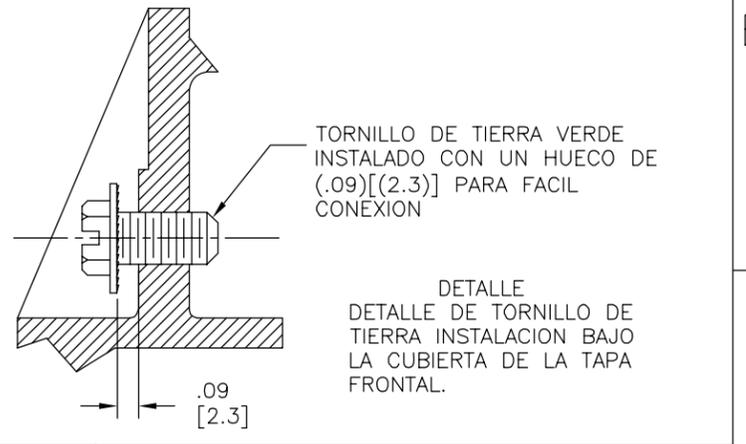


NAMEPLATE DATA	EXTERNAL CONNECTION DIAGRAM	NOTES
MODEL: F48AD44A01 CUST PN: BN34V1 HP: 1.5/.188 SF: 1.0 ROT: CCWPE RPM: 3450/1725 TYPE: C/F CODE: F FORM: FRAME: 48Y VOLTS: 230 AMPS: 6.5/2.5 MAX AMPS: SF AMPS: PH: 1 HZ: 60 INS: B AMB: 40 DUTY: CONT ENCLOSURE: ODP THERMALLY PROTECTED		1. CABLES DE LA TAPA ORIENTADOS AL LADO MOTRIZ DEL MOTOR DE LA CARCAZA CON RESPECTO A ±2° 2. TODAS LAS DIMENSIONES QUE SE MUESTREN EN PARENTESIS SON DIMENSIONES DE REFERENCIA.

PERFORMANCE CURVE	APPROVED SAMPLE	CARACTERISTICAS DE GEOMETRIA Y SIMBOLOS ▽ PLANICIDAD — RECTITUD ∠ ANGULARIDAD ⊥ PERPENDICULARIDAD (A ESQUADRA) // PARALELISMO ○ REDONDEZ (CIRCULARIDAD) ∅ CILINDRICIDAD △ PERFIL DE CUALQUIER SUPERFICIE ▲ PERFIL DE CUALQUIER LINEA † VARIACION ⊕ POSICION REAL ⊙ CONCENTRICIDAD = SIMETRIA	DIBUJADO POR: JZ	11-29-2010	DESCRIPCION: OUTLINE
F48M2W1	0802264BP2		APROBADO POR: SH	11-29-2010	
UL COMPONENT	CSA		TERCER ANGULO DE PROYECCION	FECHA EDS: 11-11-2011 REV. FORMATO: G	
FILE#	CCN#		PENDING	PENDING	
CUSTOMER	DISTRIBUTION	A MENOS QUE SE ESPECIFIQUE DE OTRA MANERA, LAS TOLERANCIAS DE LAS DIMS; SON LAS SIGUIENTES: PULG ±.1 ±.02 ±.005 ±.0005 mm ±0.5 ±0.13 ±0.013 ANG. ± 50 GRADOS ELIMINAR REBABAS Y ORILLAS FILOSAS DEL BORDE. PULG .003-.015 mm 0.1-0.4 FILETEAR ESQUINA: PULG .020 mm 0.5 MAQUINAR SUPERFICIES PULG 125 mm .32/	CONFIDENCIAL: ESTE DIBUJO Y SU INFORMACION SON PROPIEDAD DE USO EXCLUSIVO Y CONFIDENCIAL DE REGAL-BELOIT CORPORATION. Y NO DEBERAN SER REVELADOS, DUPLICADOS, DISTRIBUIDOS O USARSE DE OTRA MANERA SIN EL CONSENTIMIENTO ESCRITO DE REGAL-BELOIT CORPORATION. -TODOS LOS DERECHOS RESERVADOS.	TAMAÑO: C NUMERO DE DIBUJO: BN34V1 ESCALA: NONE HOJA: 1	

版本	ECO	编制	日期	批准	日期
E	0025356	J.M.Ramirez	04-12-2012	R.Rascon	04-12-2012

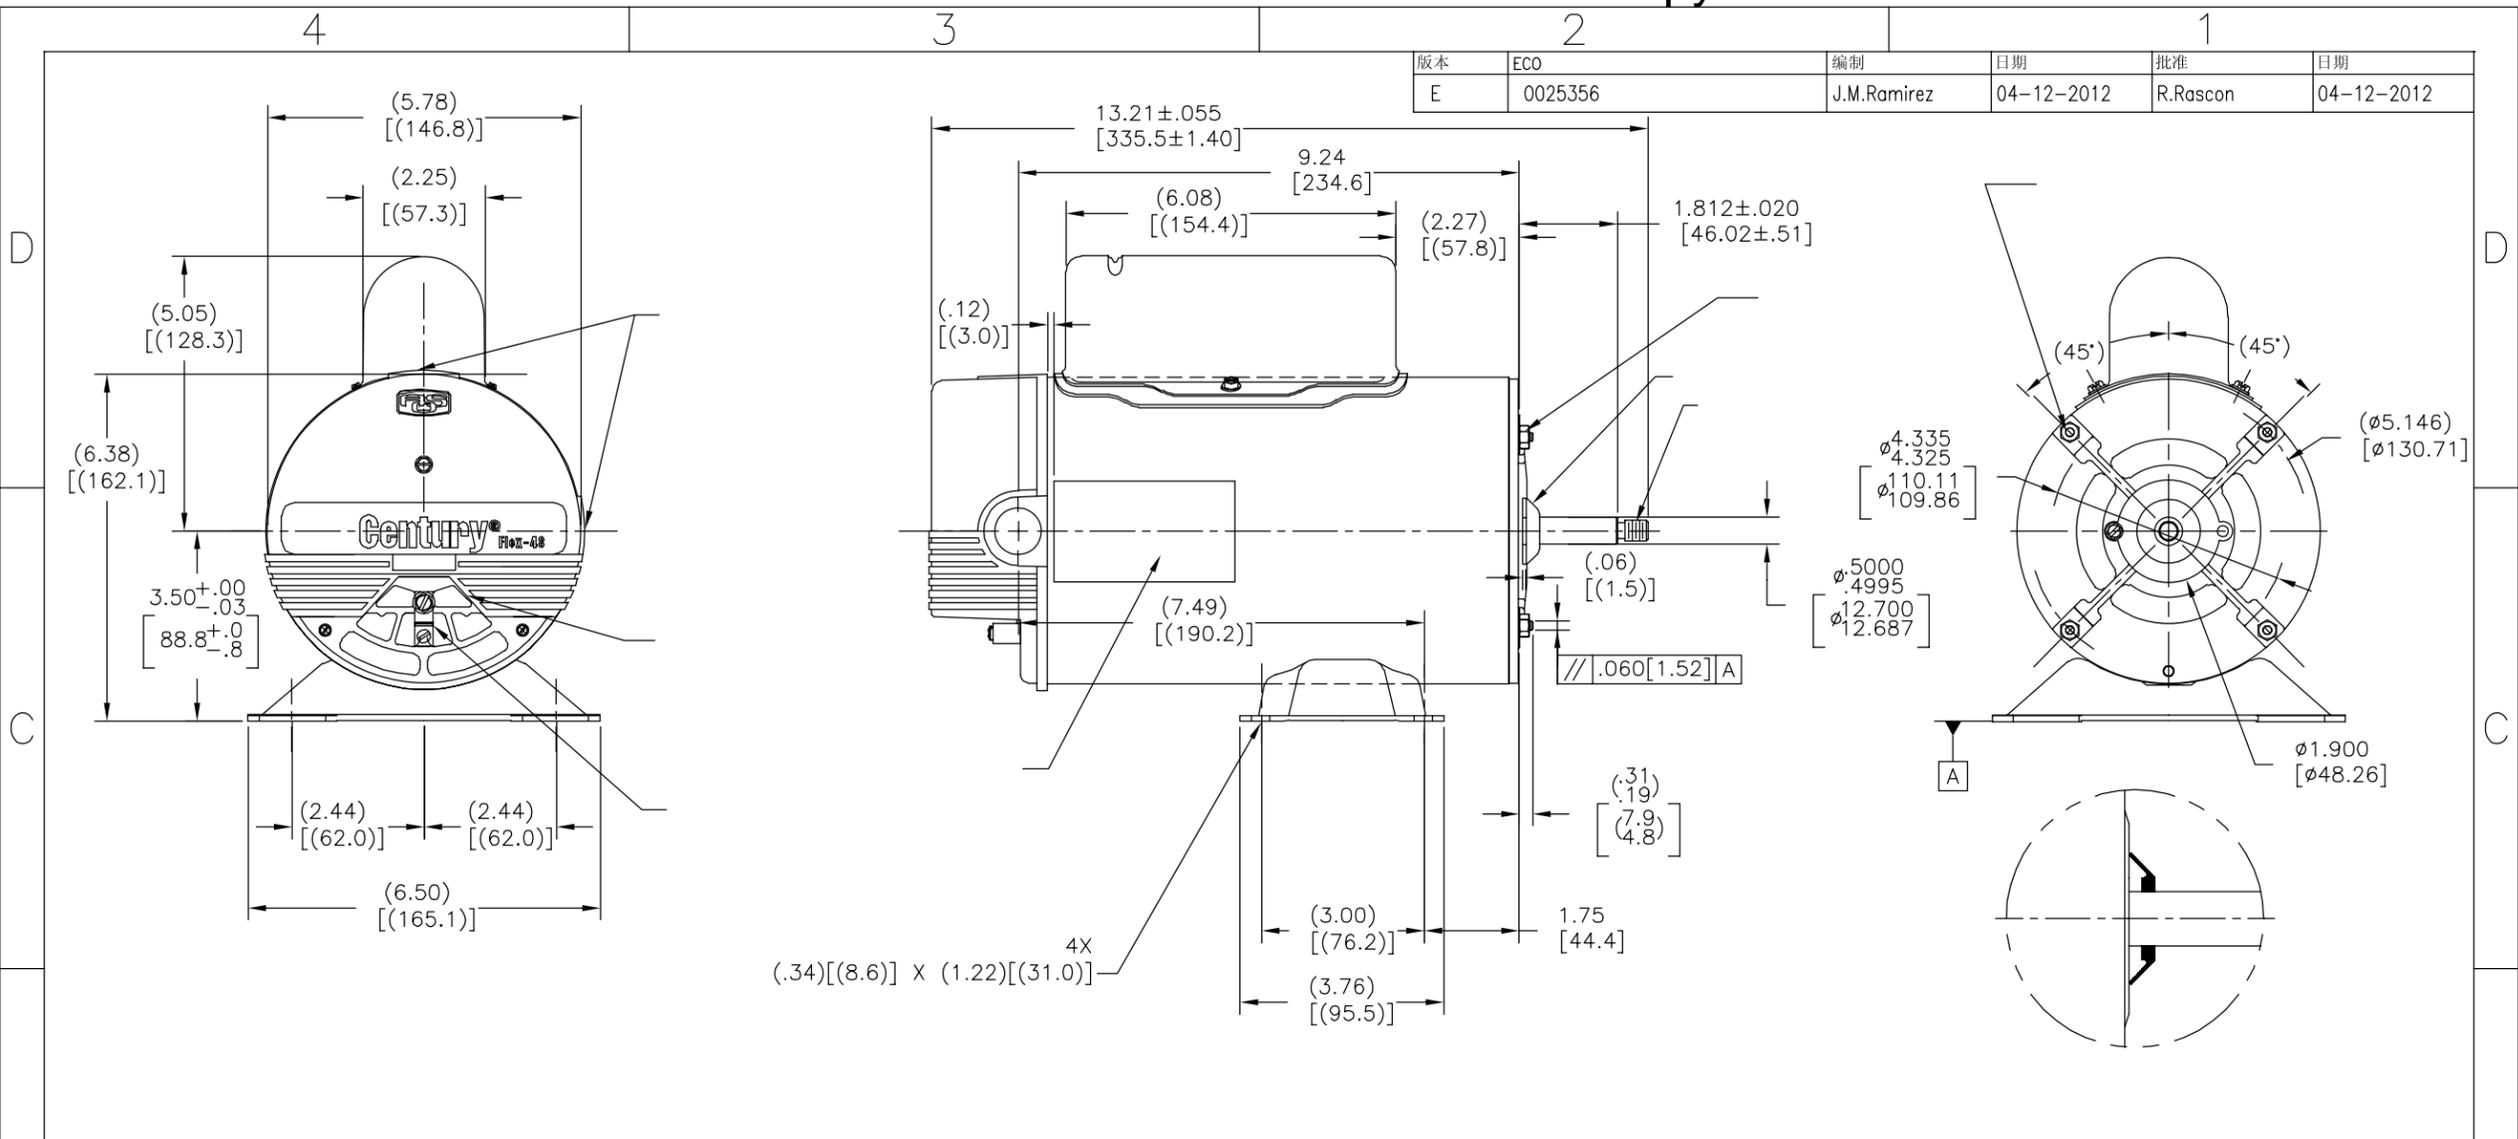


NAMEPLATE DATA	
MODEL: F48AD44A01	CUST PN: BN34V1
HP: 1.5/.188	SF: 1.0
ROT: CCWPE	
RPM: 3450/1725	
TYPE: C/F	CODE: F
FORM:	FRAME: 48Y
VOLTS: 230	
AMPS: 6.5/2.5	
MAX AMPS:	
SF AMPS:	
PH: 1	HZ: 60
INS: B	AMB: 40
DUTY: CONT	
ENCLOSURE: ODP	
THERMALLY PROTECTED	

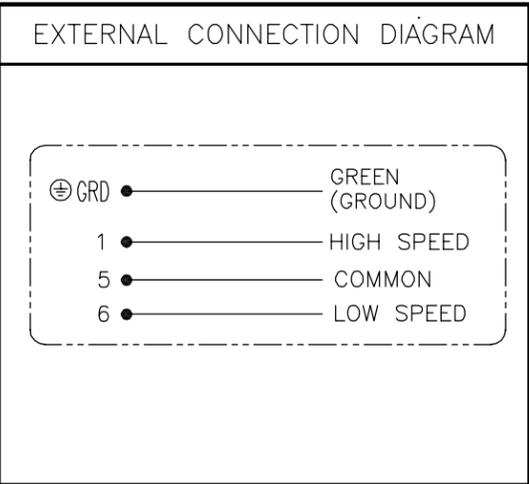

NOTES

除另有注明
尺寸公差如下:
英寸 X XX XXX XXXX
毫米 ±0.1 ±0.02 ±0.005 ±0.0005
角度 ±.50 度
清理毛刺和尖棱
英寸 .003-.015 毫米 0.1-0.4
内圆角
英寸 .020 毫米 0.5
表面粗糙度
英制 125 米制 3.2

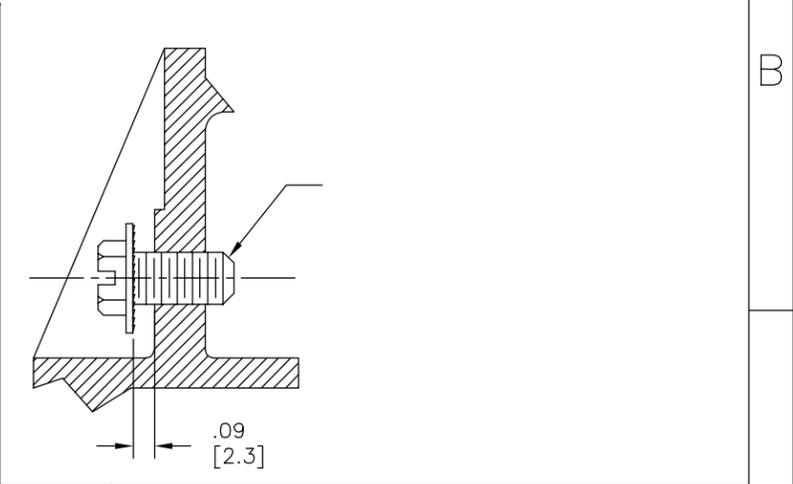

PERFORMANCE CURVE	APPROVED SAMPLE		
F48M2W1	0802264BP2		
UL COMPONENT	CSA		
FILE#	CCN#	FILE#	GUIDE#
PENDING	PENDING	PENDING	PENDING
CUSTOMER	DISTRIBUTION		

形位公差	除另有注明
□ 平面度	尺寸公差如下:
— 直线度	英寸 X XX XXX XXXX
∠ 倾斜度	毫米 ±0.1 ±0.02 ±0.005 ±0.0005
⊥ 垂直度	角度 ±.50 度
∥ 平行度	清理毛刺和尖棱
○ 圆度	英寸 .003-.015 毫米 0.1-0.4
⊘ 圆柱度	内圆角
△ 面轮廓度	英寸 .020 毫米 0.5
∩ 线轮廓度	表面粗糙度
↗ 圆跳动	英制 125 米制 3.2
⊕ 位置度	米制尺寸显示在 []
⊙ 同轴度	
≡ 对称度	

ASME Y14.5M 1994	米制尺寸显示在 []
------------------	-------------

绘图:	JZ	11-29-2010
批准:	SH	11-29-2010
第三角投影	⊕	图纸格式发布日期 11-11-2011 图纸格式版本 G
机密: 本图纸及相关信息所有权归REGAL-BELOIT CORPORATION. 未经REGAL-BELOIT CORPORATION书面授权, 不得泄露、复制、传播或作其他用途。—版权所有		

名称	OUTLINE
图幅	C
图号	BN34V1
比例	NONE
页号	1