




**ROMANSTONE**<sup>®</sup>  
INTERLOCKING PAVING STONES [romanstone.com](http://romanstone.com)

## Cobble™

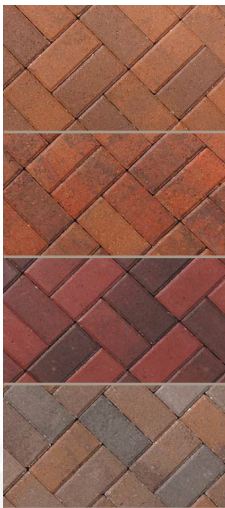


Autumn Hickory Blend

Harvest Blend

Terra Cotta Blend

Timberwood Blend

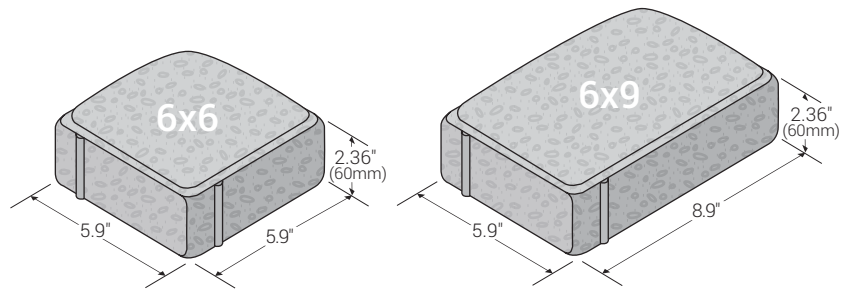

SIZE	UNITS/SQ. FT.	SQ. FT. PALLET /STRAP	UNITS PALLET /STRAP	WEIGHT /PALLET
5.9" x 5.9" x 2.36" (60 MM)	4.1	105/13.1	432/54	2,899 LBS
5.9" x 8.9" x 2.36" (60 MM)	2.8	109/21.8	300/60	2,901 LBS

This flexible paver shape incorporates rounded corners and subtly indented chamfers giving the user the option of using Cobble™ in both contemporary and traditional designs. By using a combination of the two sizes, a variety of patterns is possible.




The classic "old-world" look of Cobble™ complements traditional design.

## Specifications

Cobble™ is produced using a “no-slump” concrete mix, made under extreme pressure and high frequency vibrations. Unit pavers will meet or exceed the requirements established in the ASTM C936 (standard specification for interlocking concrete paving units). Requirements of this standard include an average compressive strength of 8,000 psi, average absorption no greater than 5%.

## Laying Patterns

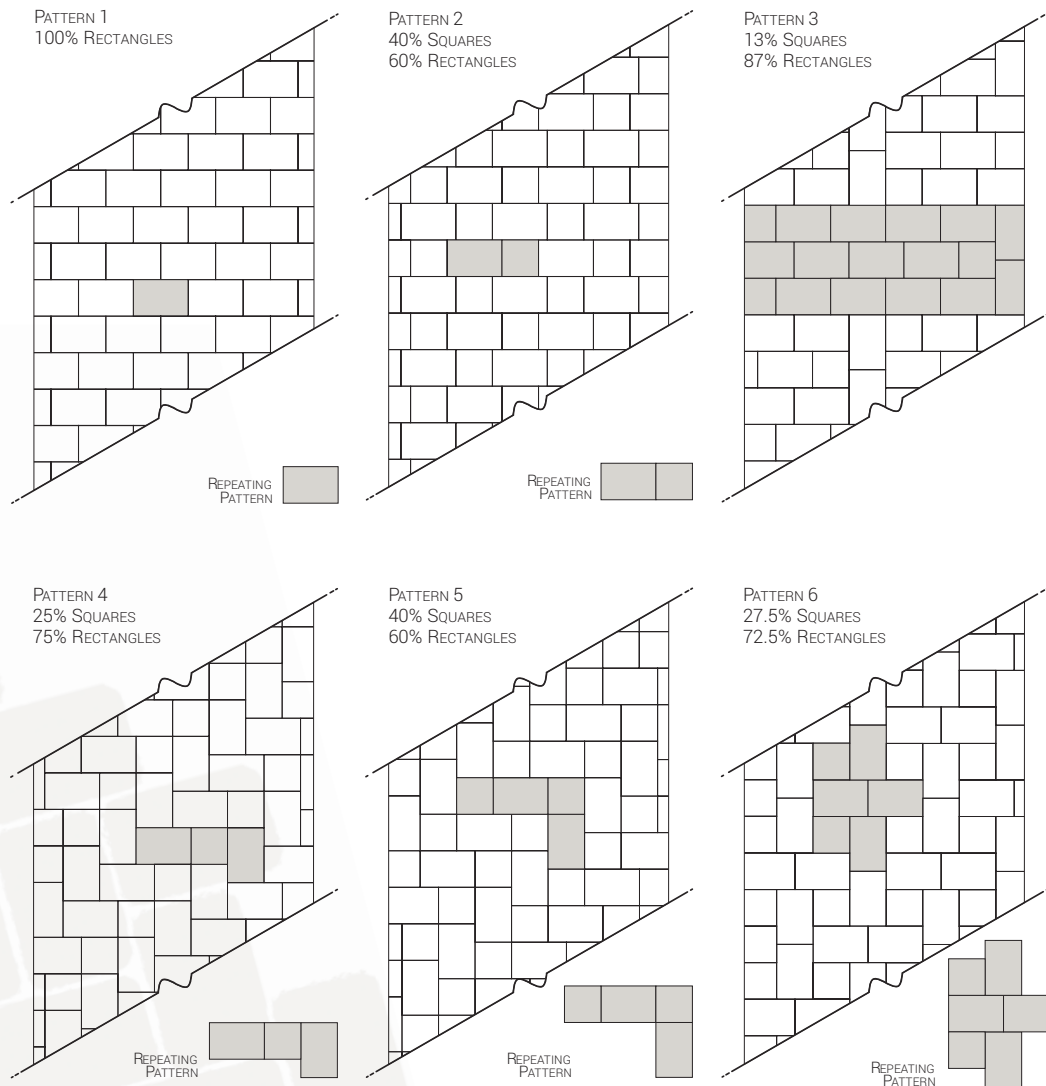

Available at: