## Plank Paver

The long and narrow design of this Nicolock favorite gives a finished and sleek appearance to complement modern design trends.



paver-shield™ pavers

paver-shield<sup>™</sup> has a tight, smooth surface texture and will not expose heavy aggregate as it wears.

Ultra-dense surface has more color and more protection. Nicolock has color from top to bottom throughout the paver ensuring a lifetime of beauty. Iron oxide pigments are guaranteed not to fade!





## Plank Paver

	WIDTH	LENGTH	THICKNESS	PCS/SF	SF/PALLET	PCS/PALLET	LBS/PALLET				
A	6"	9"	23/4"	2.66	103	54	3,122		10000		
В	6"	13"	2¾"	1.85		81		A B		C	D
C	6"	17"	23/4"	1.41		54					E
D	6"	13"	23/4"	1.85	103	189	3,122				
		GRANI	TE CITY BLEN		GRAPHITE PE	ARL BLEND*	MARE	BLE BLEND*		PEWTER	
									*	Premium Color	

## **INSTALLATION GUIDELINES: SAND**

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" – 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.


WESTCHESTER BLEND

**NICOLOCK PAVING STONE 1"-31/8" THICK** 

**SOUTH BAY BLEND\*** 

## **CROSS-SECTION OF TYPICAL INSTALLATION**

RAVEN<sup>3</sup>

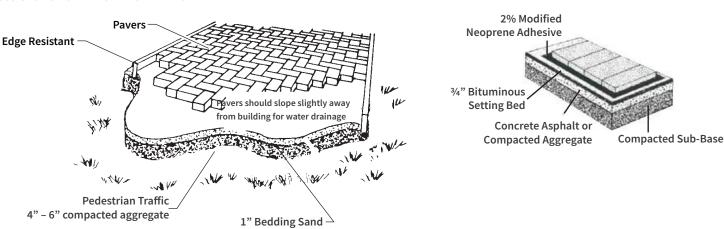

**NOTE:** All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.





naver-shield