

200 PSI CWP Bronze Gate Valves

Bronze Body • Screw-in Bonnet • Non-Rising Stem • Solid Wedge • Compact Design • Full Port

200 PSI/14 Bar Non-Shock Cold Working Pressure



MATERIAL LIST

PART	SPECIFICATION
1. Handwheel Screw	Stainless Steel, Type 430
2. Handwheel	Aluminum
3. Stem	Bronze ASTM B 99 Alloy C65100 H04
4. Stem O-Ring	EPDM
5. Bonnet	Cast Brass ASTM B 584 Alloy C84400
6. Wedge	Cast Brass ASTM B 584 Alloy C84400
7. Body	Cast Brass ASTM B 584 Alloy C84400



T-29

Threaded




S-29


Solder

DIMENSIONS — WEIGHTS

Size		A		B		C		Wt. Lbs.	
In.	mm.	In.	mm.	In.	mm.	In.	mm.	T-29	S-29
1/2	15	1.89	48	2.28	58	0.85	22	0.48	0.42
3/4	20	2.04	52	2.75	70	0.88	22	0.75	0.65
1	25	2.31	59	3.23	82	0.97	25	1.22	1.11
1 1/4	32	2.62	67	3.61	92	1.06	27	1.62	1.38
1 1/2	40	2.81	71	4.14	105	1.20	30	2.12	1.98
2	50	2.86	73	4.97	126	1.32	34	3.29	3.23

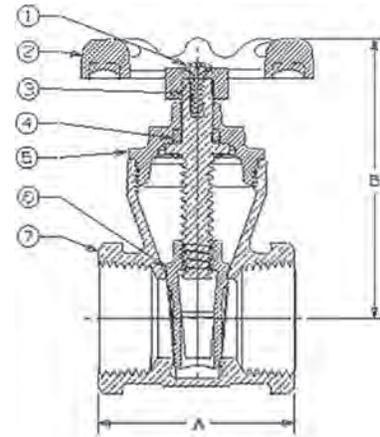

T-29
NPT x NPT

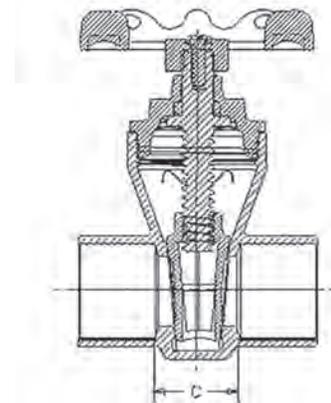

S-29
Cup x Cup



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

NOT FOR USE WITH POTABLE DRINKING WATER APPLICATIONS AFTER JANUARY 3, 2014.