

AQUALINE PERMEABLE PAVER

BELGARD PAVES THE WAY

LOW MAINTENANCE AND PROVEN DURABILITY IN A CONTEMPORARY 3-PIECE SYSTEM

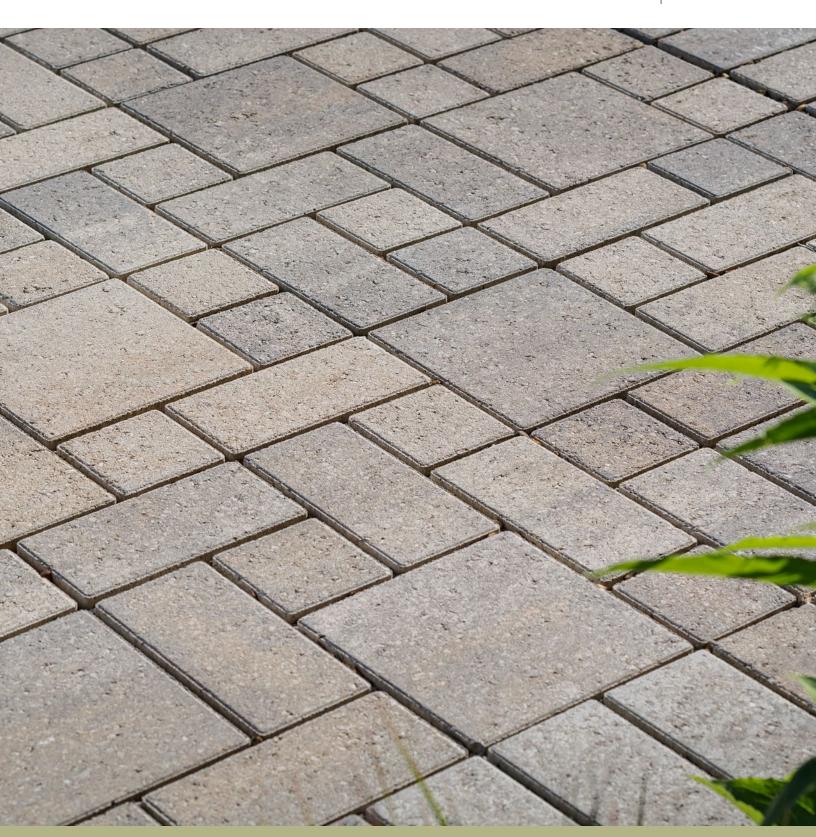

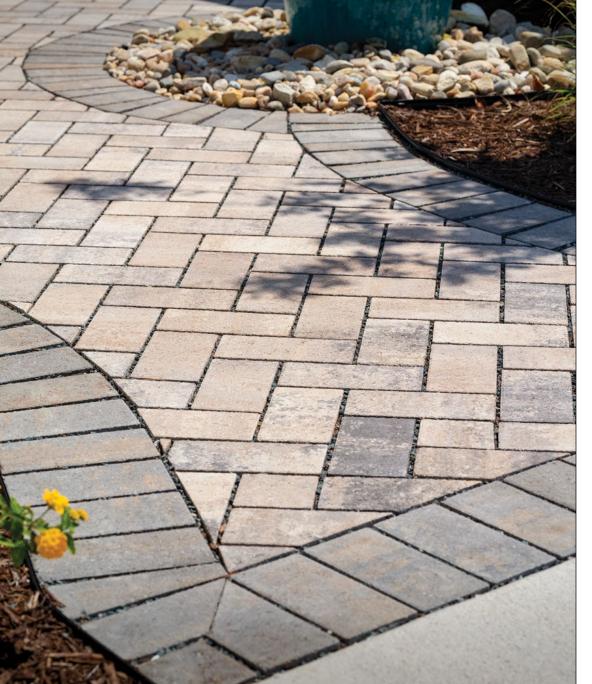

AQUALINE*

PERMEABLE PAVER

LOW MAINTENANCE AND PROVEN DURABILITY IN A CONTEMPORARY 3-PIECE SYSTEM

⊘ FEATURES & BENEFITS

- Interlocking spacer bars for increased structural performance
- Smooth surface with a microchamfer to minimize vibration and enhance wheelchair comfort
- Can be utilized to construct an ADA-compliant pavement
- True installed dimensions for design optimization
- Optimal joint openings for infiltration and maintenance
- Can eliminate stormwater runoff and improve water quality
- Meets the requirements of ASTM C936
- Chamfer Width: 3 mm
- Spacer Bar Width: 10 mm
- Surface Infiltration Rate: > 500 inches per hour (varies based on joint infill gradation)
- Surface Open Area: 12%
- · Can be installed mechanically

♦ AVAILABLE COLORS









🗞 SHAPES & SIZES

3-PIECE AQUALINE



4½ x 4½ x 31/8



41/2 x 9 x 31/8



9 x 9 x 31/8















