
STERLING°

RETAINING | FREESTANDING | COLUMN




The classic split-stone look of this retaining wall block is paired with an innovative design that allows the block to be split in half to create two-sided freestanding walls.

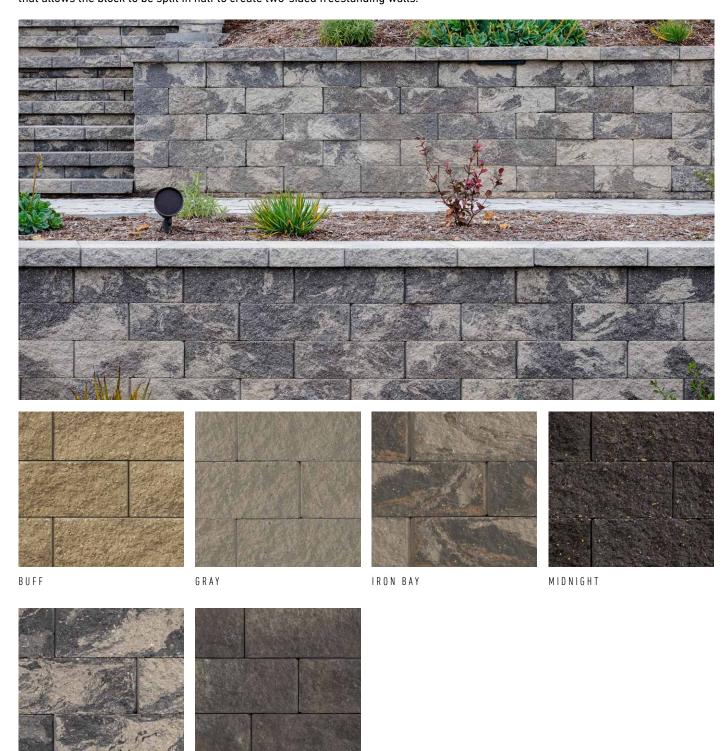

NEWPORT GRAY

TEAK

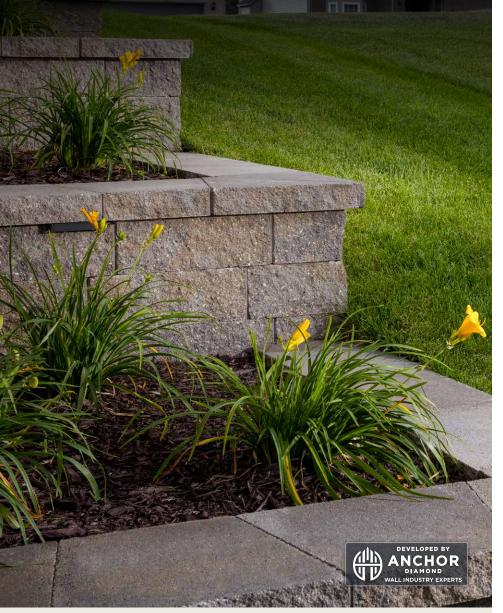















PALLET INFORMATION

STERLING®		SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ Pallet	WEIGHT/ Pallet
BLOCK	6 x 17¾ x 12	33.75	6.75	5	45	3455
CAP	3 x 18 / 12 x 13	-	-	8	72	3525

Downloadable professional resources available at **Belgard.com/Resources**

QUALITY FOR LIFE

Every step of our manufacturing process incorporates rigorous research, testing and quality assurance. We demand the highest quality from each of our facilities across North America. We believe in creating world class building products that stand the test of time. See our lifetime warranty at **Belgard.com/Warranty**

FEATURES & BENEFITS

- Build retaining walls with easy pin alignment and side view for placement visualization
- Block channels make easy pin alignment for battered or freestanding retaining walls
- Score marks for splitting block to make a twosided freestanding wall unit
- Center score mark provides guide for splitting to make corner or column units
- Hand holds allow for easier handling during installation
- Maximum gravity retaining wall height is 4 ft*
- Retaining wall minimum inside radius, measured on the base course to the front of the units: 6 ft
- Retaining wall minimum outside radius, measured on the top course to the front of the units: 4 ft
- Maximum freestanding wall (FSW) height is 3 ft*
- Freestanding wall minimum radius 4 ft
- Maximum column height is 4 ft*
- Segmental retaining wall setback/ system batter 10.6°

*Gravity wall heights are based on project specific conditions and may be lower than this value.

SHAPES & SIZES

BLOCK



6 x 17¾ x 12

CAP



3 x 18 / 12 x 13

View the product page on **Belgard.com** for more information



SHAKOPEE