

# AQUALINE™

*PERMEABLE PAVER*


LOW MAINTENANCE AND PROVEN DURABILITY  
IN A CONTEMPORARY PERMEABLE PAVER



**BELGARD**  
PAVES THE WAY™





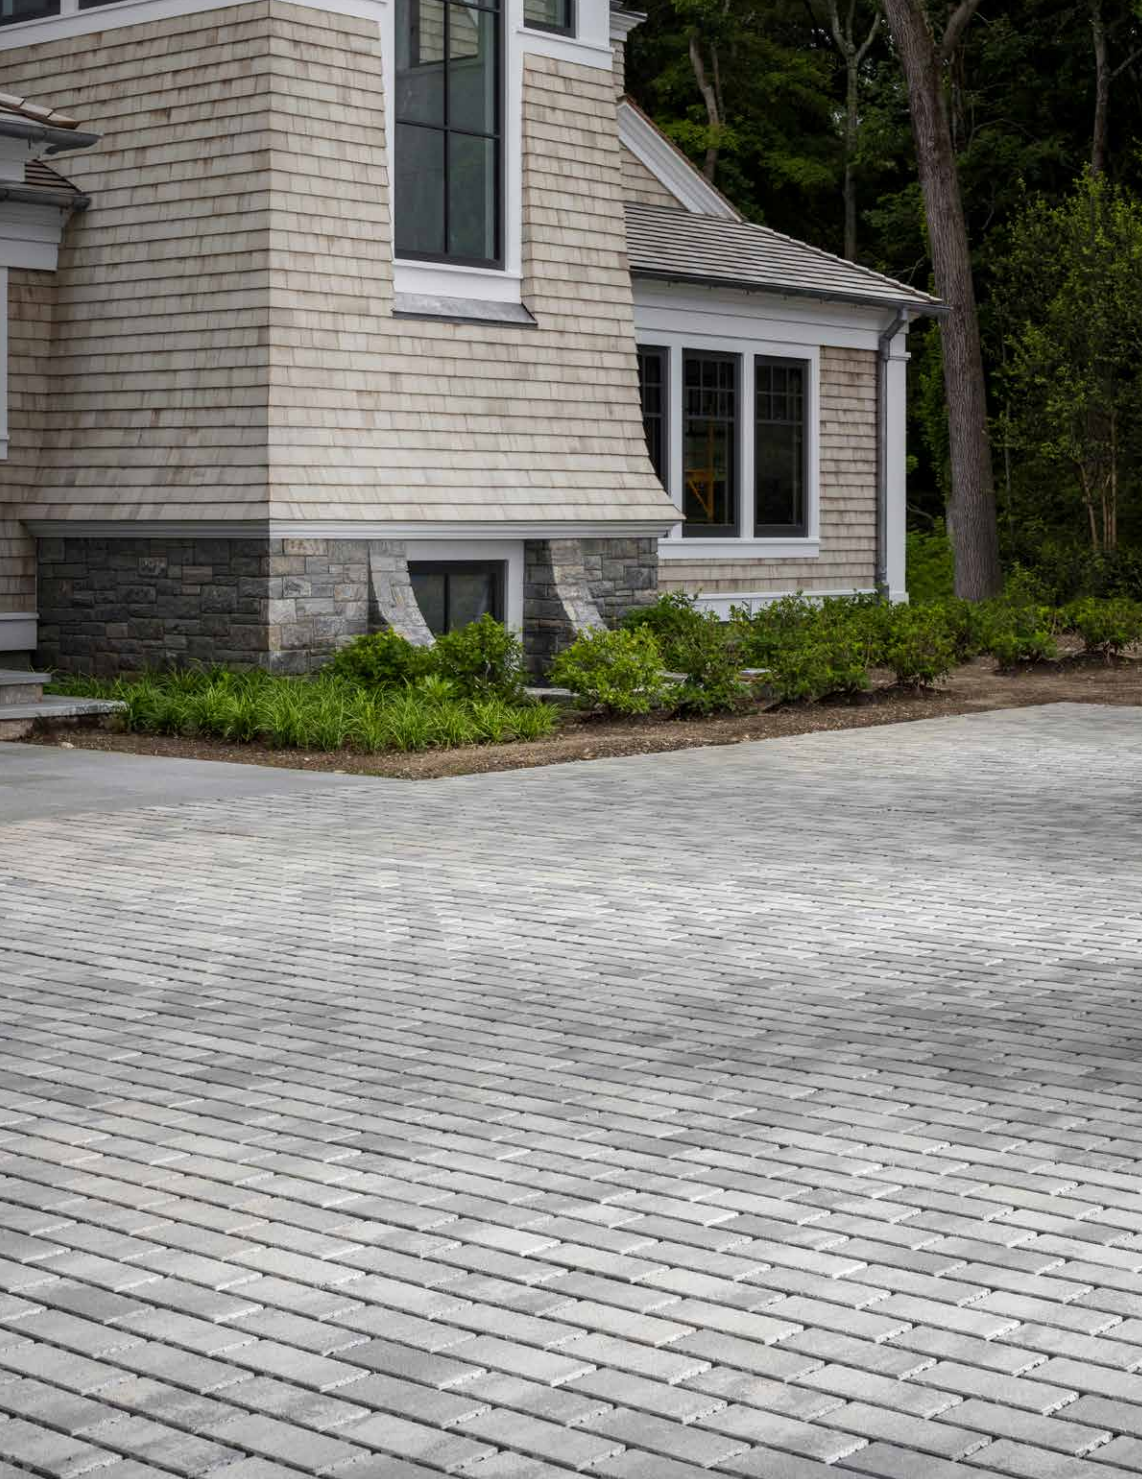

# AQUALINE™

## PERMEABLE PAVER


LOW MAINTENANCE AND PROVEN DURABILITY IN A CONTEMPORARY PERMEABLE PAVER

### ☑ FEATURES & BENEFITS

- Interlocking spacer bars for increased structural performance
- Smooth surface with a micro-chamfer to minimize vibration and enhance wheelchair comfort
- Can be utilized to construct an ADA-compliant pavement
- True installed dimensions for design optimization
- Optimal joint openings for infiltration and maintenance
- Can eliminate stormwater runoff and improve water quality
- Meets the requirements of ASTM C936
- Chamfer Width: 3 mm
- Spacer Bar Width: 10 mm
- Surface Infiltration Rate: > 500 inches per hour (varies based on joint infill gradation)
- Surface Open Area: 10%
- Can be installed mechanically

*Belgard permeable pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions, including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard Representative when specifying products for vehicular applications.*

### 🔹 AVAILABLE COLORS



DARK CHARCOAL\*



GRAY\*



VICTORIAN\*\*

### 🧱 SHAPES & SIZES

#### 80MM



4.5 x 9 x 3/8"



9 x 9 x 3/8"

\*Dark Charcoal & Gray - 9x9 ONLY

\*\*Victorian - 4.5 x 9 ONLY