


# Fiberglass INSTALLATION


## Removing and Installing Light

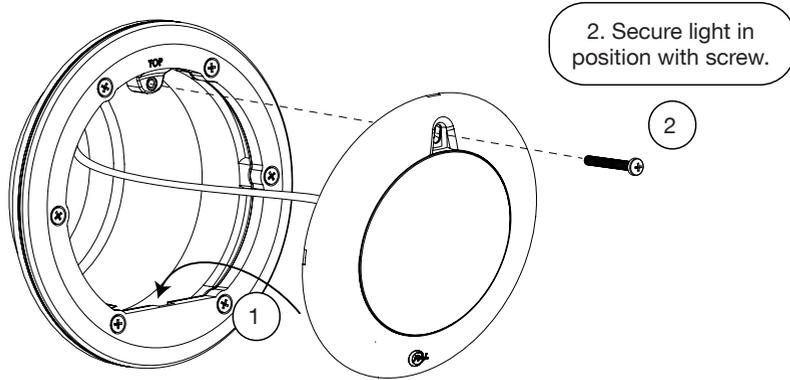

1. Rotate light onto face plate using hook.


2. Secure light in position with screw.

### Final Installation

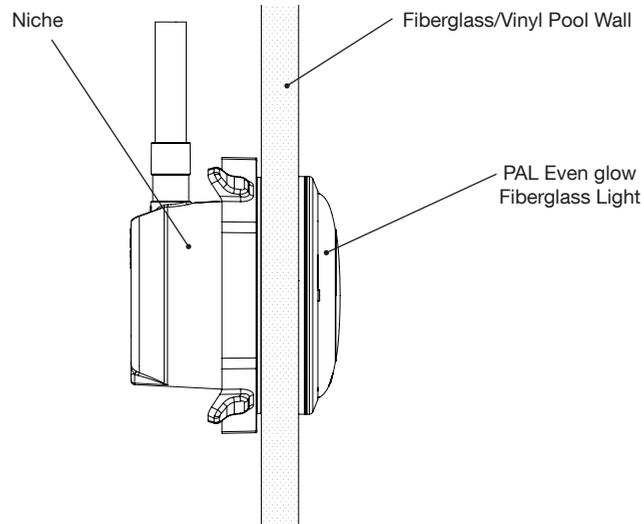

# PAL LIGHTING VINYL/FIBERGLASS NICHE INSTALLATION

## Drilling hole in Vinyl or Fiberglass pool

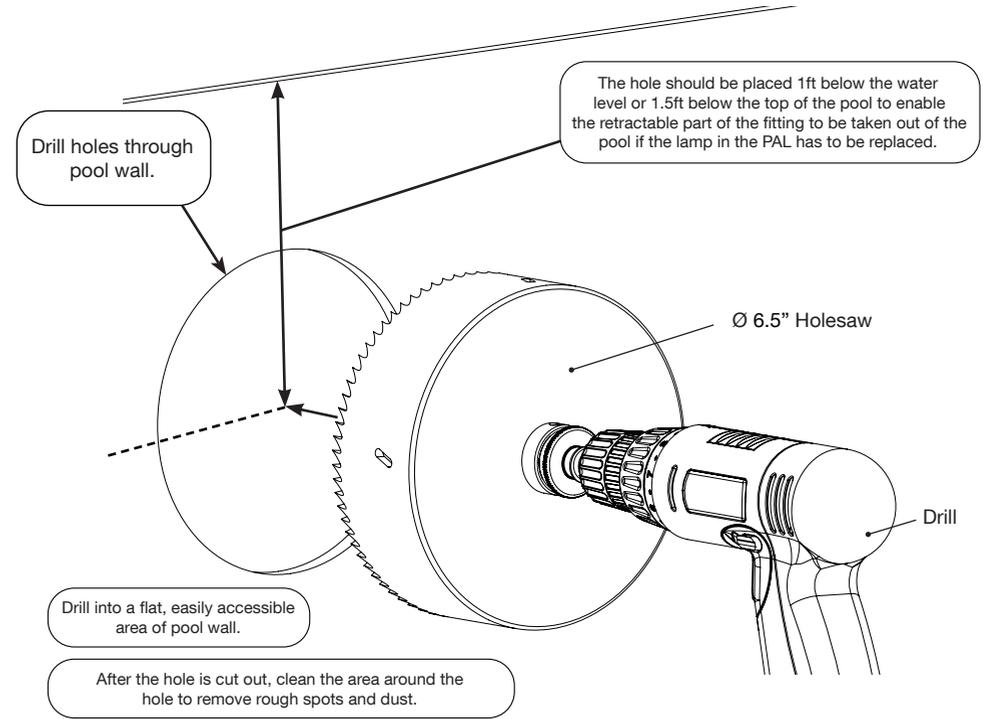

Drill holes through pool wall.


The hole should be placed 1ft below the water level or 1.5ft below the top of the pool to enable the retractable part of the fitting to be taken out of the pool if the lamp in the PAL has to be replaced.

Ø 6.5" Holesaw

Drill

Drill into a flat, easily accessible area of pool wall.

After the hole is cut out, clean the area around the hole to remove rough spots and dust.

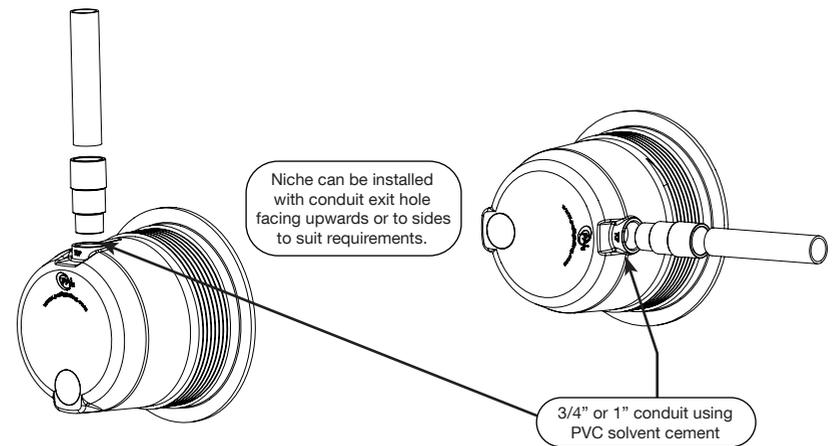


Niche can be installed with conduit exit hole facing upwards or to sides to suit requirements.


3/4" or 1" conduit using PVC solvent cement

# VINYL/ FIBERGLASS INSTALLATION


## Installing Fiberglass Light

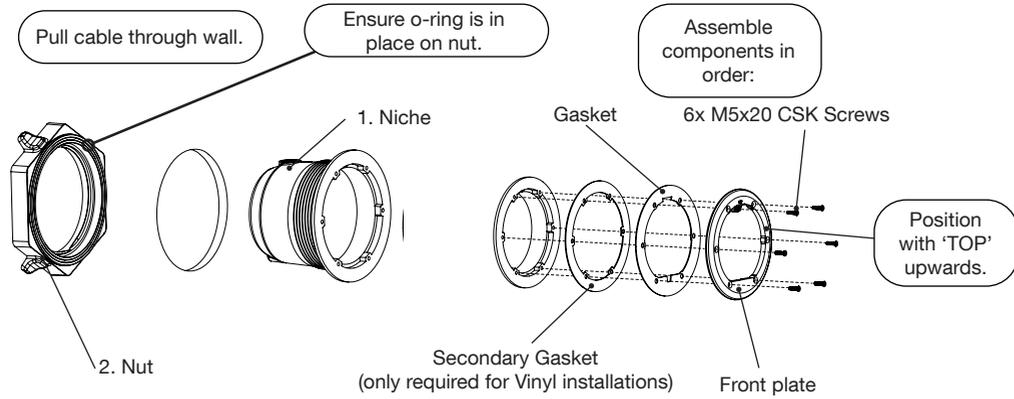

## Sealing Light to Pool Shell

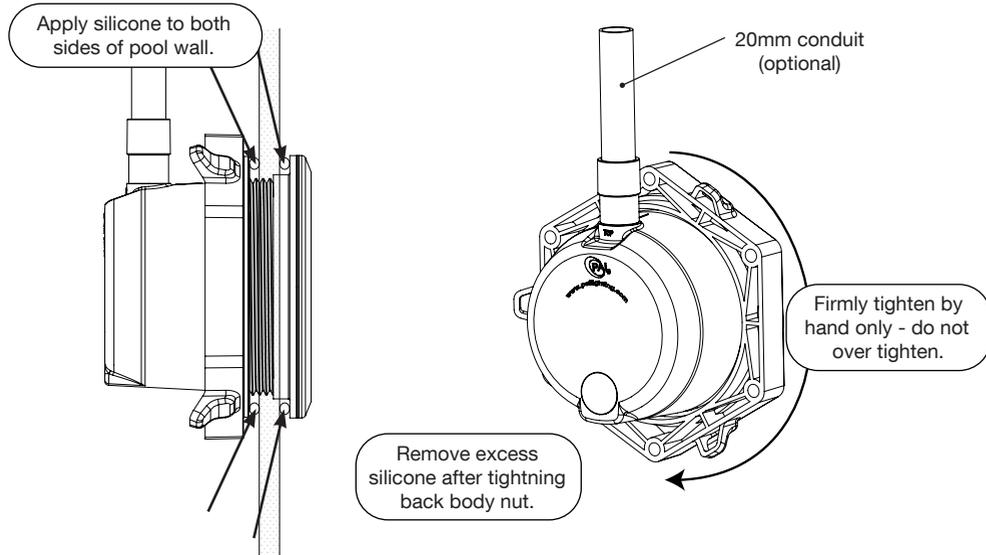

# INSTALL CABLE

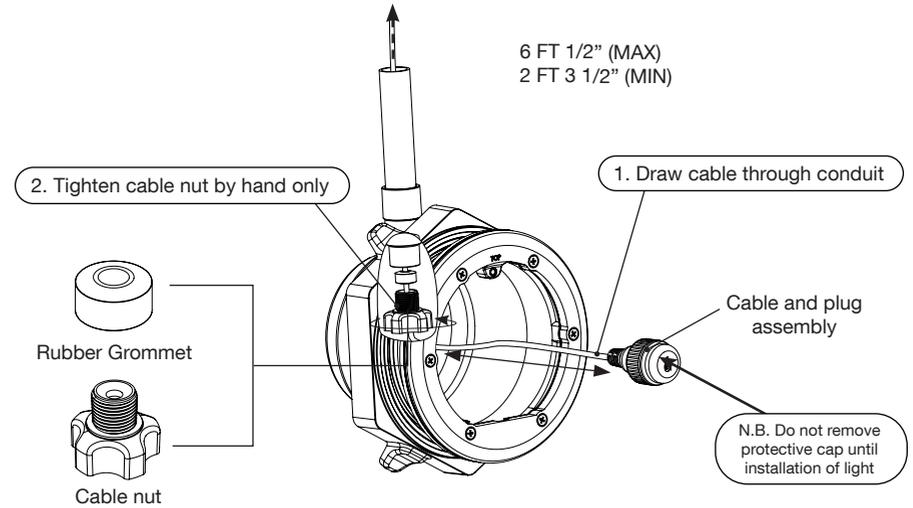

# CONNECTING TO LIGHT

