

Project Name:

Qty:  Type:

Product Number:

## FEATURES

- ▶ Outdoor - Water resistant
- ▶ RGB
- ▶ Instant color change
- ▶ UL listed for pool use
- ▶ DMX controllable
- ▶ Smart-home compatible

## QUICK SPEC

Lumens:	Color Output:	Voltage:	Cutting increment:	Max Length:
35 Lm/ft	RGB: Color changing	Standard: 24V DC	1" 25 MM	115' 35 M

## DISTRIBUTION



## STRIP BEND



## WIRE




## DIMENSIONS



Electrical:	Controls:	Lifespan:	Housing:	Bending Radius:
3 W/FT	Standard driver: On/Off RF or WiFi driver: On/Off - dimming - color change - light shows through remote.	Standard: L70 > 84,000 hr. @ 25° C	Integrated anti-tension silicone extrusion. Special t-type TPU material, chlorine resistance ≤ 10ppm NaCl resistance < 4%	>2.36" >60 MM

Optics:	Warranty:	Operating temp:	Certification	Remote Driver
238° beam angle	3 Year limited warranty.	-40°C to 50°C (-40°F to 122°F)	UL listed for pool use. IP68 and IK08 rated.	<ul style="list-style-type: none"> <li>· 1 Zone / 2 Zone / 8 Zone</li> <li>· 24V DC output</li> <li>· 120-277V AC input</li> <li>· Wi-Fi and RF</li> <li>· IP 65</li> <li>· UL Listed</li> </ul>

## CABLE ENTRY OPTIONS

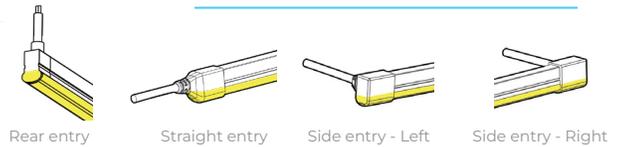

## ORDERING GUIDE

### ORDERING EXAMPLE:

**64-PAL-NFWB8-RGB-CUS-40**

1: SERIES	2: FORM	3: OUTPUT	4: CABLE*	5: LENGTH
<b>64-PAL</b>	<b>NFWB8</b>	<b>RGB</b>	<b>CUS</b>	
SERIES	LUMINAIRE TYPE	COLOR/CCT	POWER CABLE	STRIP LENGTH
<b>64-PAL</b> PAL Lighting lighting product	<b>NFWB8</b> LED Strip - Wide Beam - Side bending	<b>RGB</b> RGB - 4-Wire	<b>CUS</b> Built to project need	Enter length needed in inches - up to 1" increments.

\*Project details - please include cable entry specifics

## REMOTE DRIVERS

## ACCESSORIES

RGB REMOTE DRIVER	DMX REMOTE DRIVER
<b>64-PCR-1ZW-65</b> Remote control / PAL Lighting APP controlled - 65W -24VDC	<b>64-PCR-2DMX-65</b> DMX - 65W Driver - 24VDC - 2 Zones
<b>64-PCR-2ZW-65</b> Remote control / PAL Lighting APP controlled - 65W -24VDC - 2 Zones	<b>64-PCR-3DMX-120</b> DMX - 120W Driver - 24VDC - 2 Zones
<b>64-PCR-3DW-120</b> Remote control / PAL Lighting APP controlled - 120W -24VDC - 2 Zones	<b>64-PCR-3DMX-500</b> DMX - 500W Driver - 24VDC - 2 Zones
<b>64-PCR-3DW-500</b> Remote control / PAL Lighting APP controlled - 500W -24VDC - 2 Zones	<b>64-PCR-3DMX-500-8Z</b> DMX - 500W Driver - 24VDC - 8 Zones

MOUNTING TRACKS
<b>64-PAL-NFWB2-MT-E-6</b> 6' PC mounting track for 64-PAL-NFWB8 LED strip



**General Product Wiring**

Individual driver boards may vary - please reference driver installation guides on [www.pallighting.com](http://www.pallighting.com)

