

Project Name:

Qty: Type:

Product Number:

FEATURES

- ▶ Outdoor - Water resistant
- ▶ Instant color change
- ▶ DMX controllable
- ▶ RGB
- ▶ UL listed for pool use
- ▶ Smart-home compatible


QUICK SPEC

Lumens:	Color Output:	Voltage:	Cutting increment:	Max Length:
35 Lm/ft	RGB: Color changing	Standard: 24V DC	1" 25 MM	115' 35 M

DISTRIBUTION



STRIP BEND




Side bending


WIRE



DIMENSIONS

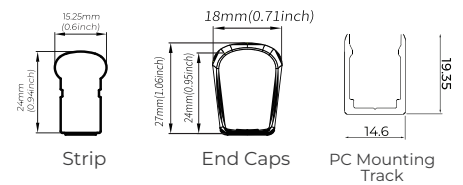

CABLE ENTRY OPTIONS

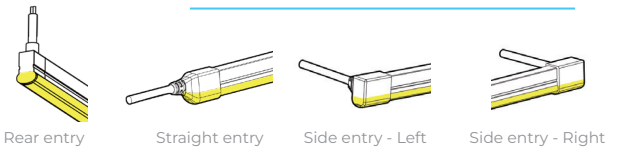

Electrical:	Controls:	Lifespan:	Housing:	Bending Radius:
3 W/FT	Standard driver: On/Off RF or WiFi driver: On/Off - dimming - color change - light shows through remote.	Standard: L70 > 84,000 hr. @ 25° C	Integrated anti-tension silicone extrusion. Special t-type TPU material, chlorine resistance ≤ 10ppm NaCl resistance < 4%	>2.36" >60 MM

Optics:	Warranty:	Operating temp:	Certification	Remote Driver
238° beam angle	3 Year limited warranty.	-40°C to 50°C (-40°F to 122°F)	UL listed for pool use. IP68 and IK08 rated.	<ul style="list-style-type: none"> · 1 Zone / 2 Zone / 8 Zone · 24V DC output · 120-277V AC input · Wi-Fi and RF · IP 65 · UL Listed

ORDERING GUIDE

ORDERING EXAMPLE:

64-PAL-NFWB8-RGB-CUS-40

1: SERIES	2: FORM	3: OUTPUT	4: CABLE*	5: LENGTH
64-PAL	NFWB8	RGB	CUS	
SERIES	LUMINAIRE TYPE	COLOR/CCT	POWER CABLE	STRIP LENGTH
64-PAL PAL Lighting lighting product	NFWB8 LED Strip - Wide Beam - Side bending	RGB RGB - 4-Wire	CUS Built to project need	Enter length needed in inches - up to 1" increments.

*Project details - please include cable entry specifics

REMOTE DRIVERS

ACCESSORIES

RGB REMOTE DRIVER	DMX REMOTE DRIVER
64-PCR-1ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC	64-PCR-2DMX-65 DMX - 65W Driver - 24VDC - 2 Zones
64-PCR-2ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC - 2 Zones	64-PCR-3DMX-120 DMX - 120W Driver - 24VDC - 2 Zones
64-PCR-3DW-120 Remote control / PAL Lighting APP controlled - 120W -24VDC - 2 Zones	64-PCR-3DMX-500 DMX - 500W Driver - 24VDC - 2 Zones
64-PCR-3DW-500 Remote control / PAL Lighting APP controlled - 500W -24VDC - 2 Zones	64-PCR-3DMX-500-8Z DMX - 500W Driver - 24VDC - 8 Zones

MOUNTING TRACKS
64-PAL-NFWB2-MT-E-6 6' PC mounting track for 64-PAL-NFWB8 LED strip



General Product Wiring

Individual driver boards may vary - please reference driver installation guides on www.pallighting.com

