


PARALEVEL®

AUTOMATIC WATER LEVELER

INSTALLING PARALEVEL EXTENSION

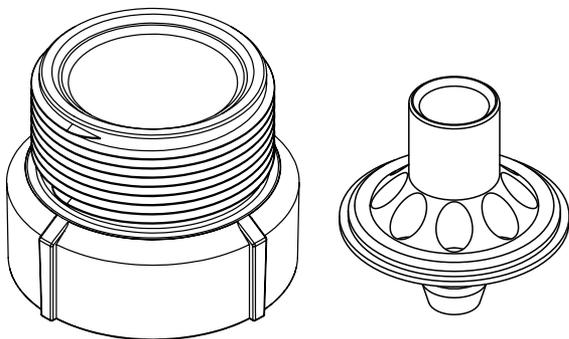

004-027-7807-00 REV040714

US and Foreign patents and patents pending see www.1paramount.com/about/patents/

295 East Corporate Place • Suite 100 • Chandler, AZ 85225

Toll Free: 1.800.621.5886 • Phone: 480.893.7607

Fax: 480.753.3397

Paramount@1Paramount.com • www.1Paramount.com




Paramount

Pool Life. Simplified.

NOTE THIS EXTENSION RAISES THE FLOAT ASSEMBLY AND YOU MUST HAVE ENOUGH CLEARANCE UNDER THE DECK LID FOR IT TO CLEAR THE NEW FLOAT ASSEMBLY HEIGHT.

1. Turn off the water to the Paralevel. Remove the float assembly by pushing down on the top and turning it counter clockwise. Remove the plastic retainer nut in the bottom of the Paralevel housing (The optional PV-3 nozzle removal tool can be used to remove and reinstall this nut).
2. Screw the retainer nut to the 1 inch extension housing and hand tighten.
3. Apply a small amount of silicone lube on the yellow O-ring on the 1 inch extension and insert this piece into the Paralevel housing with the O-ring side down.
4. Screw the retainer nut and 1 inch extension housing assembly tightly back into the bottom of the Paralevel. If more than 1 inch of rise is needed, a second extension can be used between the retainer nut and the first extension and extension housing.
5. Place a small amount of silicon lube on the Paralevel float assembly yellow O-ring and carefully insert it into the unit, moving it around a little, until you feel the end drop slightly into the center of the retainer nut. Push down and turn clockwise to lock in place. Adjust the float as needed.

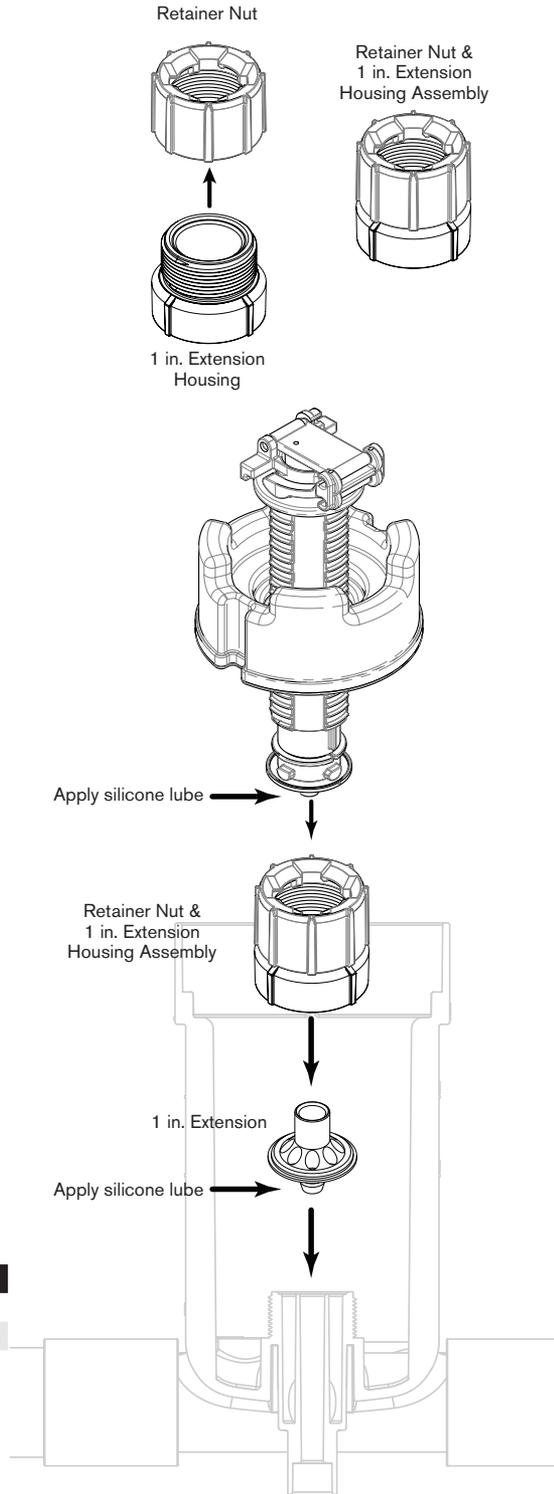

Paramount Part#	Description
005-761-2934-00	Paralevel Float 1 in. Extension
005-761-2935-00	Paralevel Float 2 in. Extension
004-627-5452-00	PV3 Nozzle Removal Tool