



CAPRIANA

PAVERS





CAPRIANA

From expansive courtyards to intimate patios, Capriana provides grand scale and elegance to hardscape designs. A trio of large-format pavers with a nature-inspired surface texture and proprietary joint profile combine for a modern interpretation of an Italian piazza.

UNITS



#671 - Small 50mm



#672 - Medium 50mm



#673 - Large 50mm

BUNDLED



Small



Medium



Large

#670 - Combo 50mm

Before specifying a specific product, please confirm availability with your local Keystone Hardscapes producer.

UNIT DIMENSIONS

PRODUCT	DIMENSIONS			PRODUCT #
	Width	Length	Height	
Small 50mm	14.00" 356mm	7.00" 178mm	2.00" 50.8mm	671
Medium 50mm	14.00" 356mm	14.00" 356mm	2.00" 50.8mm	672
Large 50mm	14.00" 356mm	21.00" 534mm	2.00" 50.8mm	673

PRODUCT		DIMENSIONS			PRODUCT #
		Width	Length	Height	
Combo 50mm	Small	14.00" 356mm	7.00" 178mm	2.00" 50.8mm	670
	Medium	14.00" 356mm	14.00" 356mm		
	Large	14.00" 356mm	21.00" 534mm		

FEATURES & BENEFITS

Perfect For:

- Pedestrian applications.
- Made of durable concrete with iron oxide pigments that will not fade with extended UV exposure. Meets or exceeds applicable requirements of ASTM C936 and C1782.

Ease of Installation

- Joints and surfaces are designed to create a natural look, minimize furniture wobble, and meet ADA gap and lippage requirements.
- Designed to be installed in an efficient repeating runner or ashlar pattern, with equal numbers of 1/2, square, and 3/2 stones.

Aesthetics

- Lightly crinkled surfaces and notchy edges create an understated yet natural look.

Note: Unit color, dimensions, weight, and availability varies by manufacturer.



PEDESTRIAN



PATIOS



POOL DECKS





INSTALLATION INSTRUCTIONS

STEP 1: Excavate unsuitable, unstable or unconsolidated subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for base material - typically minimum 4-8 inches thick (101.6mm - 203.2mm). Compact base to optimum moisture/density or as otherwise directed by Site Engineer/ Architect/Landscape Architect.

STEP 2: Place bedding course of washed sand conforming to the grading requirements of ASTM C 33 to a maximum uniform depth of 1-inch (25.4mm). Screed to the grade and profile required.

STEP 3: Install Capriana with joints to a nominal $\frac{1}{8}$ inch (3mm).

STEP 4: Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaged edges.


STEP 5: Use a low-amplitude plate compactor capable of at least minimum of 4,000 lbf (18 kN) at a frequency of 75-100 Hz to vibrate the pavers into the sand. Remove any cracked or damaged pavers and replace with new units.

STEP 6: Post compaction, spread and sweep dry ASTM C 33 or ASTM C 144 sand over the entire paving area.


STEP 7: Make one more pass with the plate compactor to completely fill the joints with sand.

STEP 8: Sweep paver surface clean for final acceptance by owner/ owner's agent.


NOTE: Colors are shown as accurately as possible in brochures and samples, but due to the nature of the product, regional color differences and variables in print reproduction, colors may not match exactly. For best results in maintaining color consistency, pavers must be installed from several cubes at a time. Efflorescence, a whitish, powder-like deposit, may appear on concrete pavers. This is a natural occurrence in any concrete product and will usually wear off over time.

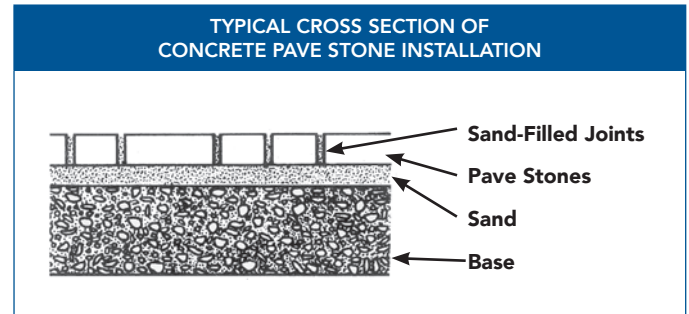

INSTALLATION PATTERNS



3-Pc Ashlar 01



3-Pc Ashlar 02

Complete installation and specification details are available by contacting your Keystone Hardscapes Sales Representative.



www.keystonehardscapes.com

© 2019 The QUIKRETE Companies – KHS 02/19

FOLLOW US

