



ADIRONDACK

PAVERS





ADIRONDACK

This captivating pave stone features the historic combination of square and rectangular modules working in tandem to create a random segmental paving surface. While its unique and distinct cast edge treatment sets this stone apart from its class, Adirondack's textured surface creates the feel of old cobble paving. This pave stone is strong and durable enough for residential as well as commercial applications. It is available in a standard and tumbled finish and a variety of colors to accommodate any project design.

UNITS

BUNDLED

Unit A

Unit B

Unit C

Unit D

#504 - Runner 60mm

#514 - Jumper 60mm

BUNDLED

Unit A

Unit B

Unit C

Unit D

#524 - Runner Mech 60mm

Before specifying a specific product, please confirm availability with your local Keystone Hardscapes producer.

FEATURES & BENEFITS

Perfect For:

- Light vehicular applications.
- Made of durable concrete with iron oxide pigments that will not fade with extended UV exposure. Meets or exceeds applicable requirements of ASTM C936.

Ease of Installation

- Designed for the traditional and efficient random runner bond installation pattern, with common stone widths and various lengths.
- Joints and surfaces are designed to create a natural look and minimize furniture wobble.

Aesthetics

- Gently undulating surfaces and edges create the timeless, old-world look of quarried basalt setts.

Note: Unit color, dimensions, weight, and availability varies by manufacturer.





UNIT DIMENSIONS

PRODUCT		DIMENSIONS			PRODUCT #
		Width	Length	Height	
Runner 60mm	A	5.51" 140mm	4.69" 119mm	2.36" 60mm	504
	B	5.51" 140mm	6.69" 170mm		
	C	5.51" 140mm	7.81" 198.3mm		
	D	5.51" 140mm	9.37" 238mm		
Jumper 60mm		9.37" 238mm	11.02" 280mm	2.36" 60mm	514

PRODUCT		DIMENSIONS			PRODUCT #
		Width	Length	Height	
Runner Mech 60mm	A	5.51" 140mm	4.69" 119mm	2.36" 60mm	524
	B	5.51" 140mm	6.69" 170mm		
	C	5.51" 140mm	7.81" 198.3mm		
	D	5.51" 140mm	9.37" 238mm		





INSTALLATION INSTRUCTIONS

STEP 1: Excavate unsuitable, unstable or unconsolidated subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for base material - typically minimum 4-8 inches thick (101.6mm - 203.2mm). Compact base to optimum moisture/density or as otherwise directed by Site Engineer/Architect/Landscape Architect.

STEP 2: Place bedding course of washed sand conforming to the grading requirements of ASTM C 33 to a maximum uniform depth of 1-inch (25.4mm). Screed to the grade and profile required.

STEP 3: Install Adirondack with joints to a $\frac{1}{8}$ inch (3mm).

STEP 4: Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaged edges.


STEP 5: Use a low-amplitude plate compactor capable of at least minimum of 4,000 lbf (18 kN) at a frequency of 75-100 Hz to vibrate the pavers into the sand. Remove any cracked or damaged pavers and replace with new units.

STEP 6: Post compaction, spread and sweep dry ASTM C 33 or ASTM C 144 sand over the entire paving area.


STEP 7: Make one more pass with the plate compactor to completely fill the joints with sand.

STEP 8: Sweep paver surface clean for final acceptance by owner/owner's agent.


NOTE: Colors are shown as accurately as possible in brochures and samples, but due to the nature of the product, regional color differences and variables in print reproduction, colors may not match exactly. For best results in maintaining color consistency, pavers must be installed from several cubes at a time. Efflorescence, a whitish, powder-like deposit, may appear on concrete pavers. This is a natural occurrence in any concrete product and will usually wear off over time.

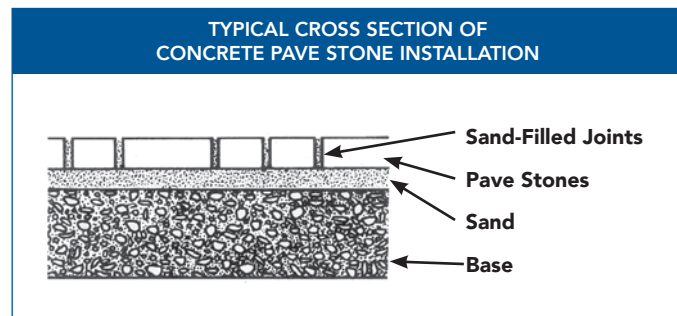


INSTALLATION PATTERNS



Random Runner



Ashlar



Mech Lay

Complete installation and specification details are available by contacting your Keystone Hardscapes Sales Representative.



www.keystonehardscapes.com

FOLLOW US

