



**VINTAGE STONE®**

**PAVERS**





# VINTAGE STONE®

The Vintage Stone series removes all topography from stone surfaces and joints, creating a smooth and nearly textureless pavement to evoke clay and draw attention to color patterns. Vintage is available in a wide range of sizes to suit a variety of installation patterns including random runner, repeating runner and ashlar, and single shape patterns. Vintage is available in a tumbled finish, which weathers the stones by breaking and softening edges and corners.

## UNITS



**#214** - 4x4 60mm  
**#214T** - 4x4 60mm Tumbled



**#235** - 4x8 40mm  
**#235T** - 4x8 40mm Tumbled



**#237** - 4x8 60mm  
**#237T** - 4x8 60mm Tumbled



**#239** - 4x8 80mm  
**#239T** - 4x8 80mm Tumbled




**#282** - 6x6 60mm  
**#282T** - 6x6 60mm Tumbled



**#292/#290\*\*** - 6x9 60mm  
**#292T/#290T\*\*** - 6x9 60mm Tumbled



**#280** - 9x9 60mm  
**#280T** - 9x9 60mm Tumbled

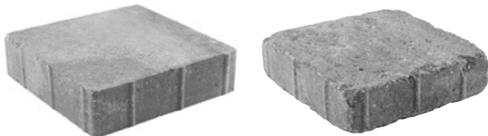

**#273** - 12x12 60mm  
**#273T** - 12x12 60mm Tumbled

### BUNDLED



3x6                      6x6  
**#291** - 2-pc Combo 60mm  
**#291T** - 2-pc Combo 60mm Tumbled

### BUNDLED



3x6                      6x6                      6x9  
**#293** - 3-pc Combo 60mm  
**#293T** - 3-pc Combo 60mm Tumbled

### BUNDLED



**A**                      **B**                      **C**                      **D**  
**#401** - Runner 60mm    **#401T** - Runner 60mm Tumbled

Before specifying a specific product, please confirm availability with your local Keystone Hardscapes producer.



## UNIT DIMENSIONS

PRODUCT	DIMENSIONS			APPLICATION	PRODUCT #	
	Width	Length	Height		Standard	Tumbled
4x4 60mm	3.94" 100mm	3.94" 100mm	2.36" 60mm	Light <sup>2</sup>	214	214T
4x8 40mm	3.94" 100mm	7.87" 200mm	1.57"* 40mm	Pedestrian <sup>1</sup>	235	235T
4x8 60mm	3.94" 100mm	7.87" 200mm	2.36" 60mm	Light <sup>2</sup>	237	237T
4x8 80mm	3.94" 100mm	7.87" 200mm	3.15" 80mm	Heavy <sup>3</sup>	239	239T
6x6 60mm	5.91" 150mm	5.91" 150mm	2.36" 60mm	Light <sup>2</sup>	282	282T
6x9 60mm	5.91" 150mm	8.86" 225mm	2.36" 60mm	Light <sup>2</sup>	292	292T
					290**	290T**
9x9 60mm	8.86" 225mm	8.86" 225mm	2.36" 60mm	Light <sup>2</sup>	280	280T
12x12 60mm	11.81" 300mm	11.81" 300mm	2.36" 60mm	Light <sup>2</sup>	273	273T

PRODUCT		DIMENSIONS			APPLICATION	PRODUCT #	
		Width	Length	Height		Standard	Tumbled
2-pc Combo 60mm	3x6	5.91" 150mm	2.95" 75mm	2.36" 60mm	Light <sup>2</sup>	291	291T
	6x6	5.91" 150mm	5.91" 150mm				
3-pc Combo 60mm	3x6	5.91" 150mm	2.95" 75mm	2.36" 60mm	Light <sup>2</sup>	293	293T
	6x6	5.91" 150mm	5.91" 150mm				
	6x9	5.91" 150mm	8.86" 225mm				
Runner 60mm	A	5.91" 150mm	5.12" 130mm	2.36" 60mm	Light <sup>2</sup>	401	401T
	B	5.91" 150mm	5.91" 150mm				
	C	5.91" 150mm	6.69" 170mm				
	D	5.91" 150mm	7.38" 187.5mm				

\* Not for use in vehicular applications.

\*\* Item not available at all locations. Special unit per pallet count.

## FEATURES & BENEFITS

### Perfect For:

- Suitable for multiple applications. **See chart above.**
- Made of durable concrete with iron oxide pigments that will not fade with extended UV exposure. Meets or exceeds applicable requirements of ASTM C936.

### Ease of Installation

- Joints and surfaces meet ADA gap and lippage requirements.
- Square shape easily forms stacked and runner patterns.

### Aesthetics

- Smooth surfaces and chamferless edges create the sleekest segmental pavement possible, with crisp elements and tight joints.

**Note:** Unit color, dimensions, weight, and availability varies by manufacturer.





## INSTALLATION INSTRUCTIONS

**STEP 1:** Excavate unsuitable, unstable or unconsolidated subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for base material - typically minimum 4-8 inches thick (101.6mm - 203.2mm). Compact base to optimum moisture/density or as otherwise directed by Site Engineer/Architect/Landscape Architect.

**STEP 2:** Place bedding course of washed sand conforming to the grading requirements of ASTM C 33 to a maximum uniform depth of 1-inch (25.4mm). Screed to the grade and profile required.


**STEP 3:** Install Vintage Stone with joints to a nominal 1/8 inch (3mm).

**STEP 4:** Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaged edges.

**STEP 5:** Use a low-amplitude plate compactor capable of at least minimum of 5,000 lbf (18 kN) at a frequency of 75-100 Hz to vibrate the pavers into the sand. Remove any cracked or damaged pavers and replace with new units.

**STEP 6:** Post compaction, spread and sweep dry ASTM C 33 or ASTM C 144 sand over the entire paving area.

**STEP 7:** Make one more pass with the plate compactor to completely fill the joints with sand.

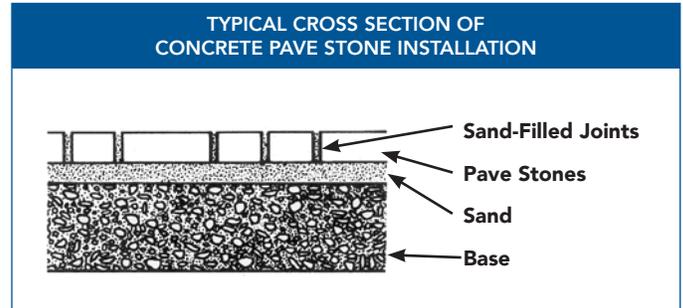


**STEP 8:** Sweep paver surface clean for final acceptance by owner/owner's agent.

**NOTE:** Colors are shown as accurately as possible in brochures and samples, but due to the nature of the product, regional color differences and variables in print reproduction, colors may not match exactly. For best results in maintaining color consistency, pavers must be installed from several cubes at a time. Efflorescence, a whitish, powder-like deposit, may appear on concrete pavers. This is a natural occurrence in any concrete product and will usually wear off over time.

Complete installation and specification details are available by contacting your Keystone Hardscapes Sales Representative.

## INSTALLATION PATTERNS

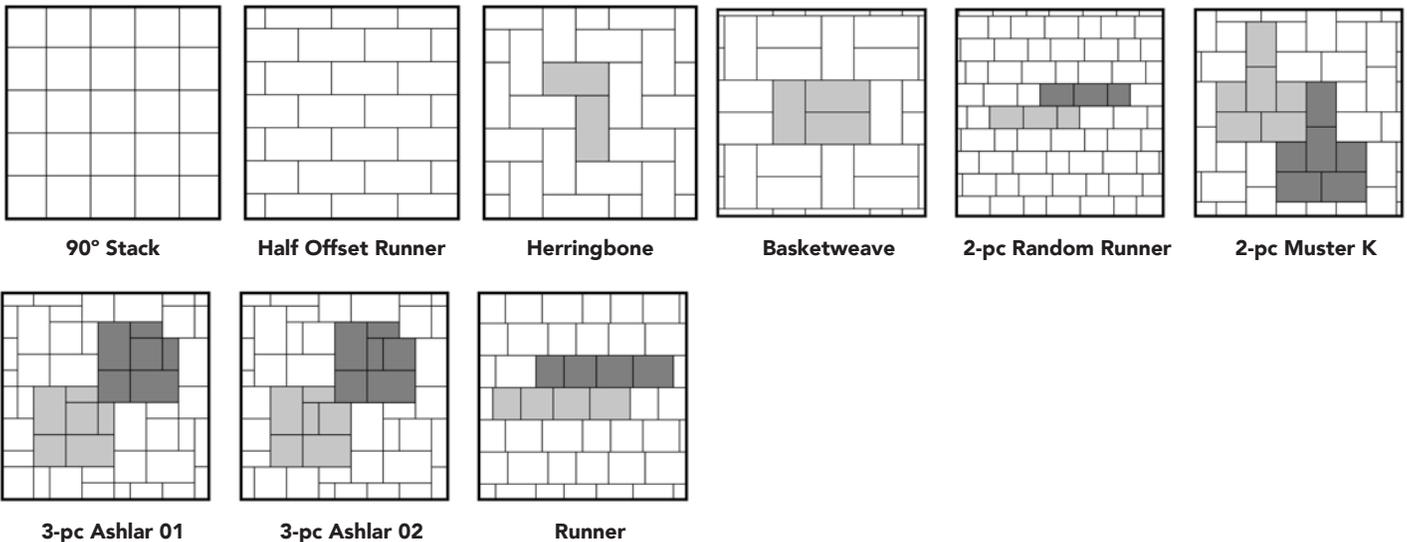

[www.keystonehardscapes.com](http://www.keystonehardscapes.com)

FOLLOW US

