

COPING

PAVERS





COPING

The Coping Stone is designed to complement any concrete pave stone pedestrian application. It can be used for pool coping, step treads and decorative patio borders. It allows the designer consistency in the paver pavement's visual edge. This consistency will provide confidence that the edge profile will parallel with the finished project paving surface.

UNITS







#302 - Bullnose Drop 60mm



#303 - Remodel 30mm

Before specifying a specific product, please confirm availability with your local Keystone Hardscapes producer.

UNIT DIMENSIONS

PRODUCT	DIMENSIONS			PRODUCT #
	Width	Length	Height	PRODUCT#
Bullnose 60mm	3.54" 90mm	9.00" 228.6mm	2.36" 60mm	301
Bullnose Drop 60mm	3.86" 98mm	14.00" 356mm	2.36" 60mm	302

PRODUCT	DIMENSIONS			PRODUCT #
	Width	Length	Height	FRODUCT#
Remodel 30mm	3.62" 92mm	9.09" 231mm	1.38" 35mm	303

FEATURES & BENEFITS

Perfect For:

- Pedestrian applications.
- Made of durable concrete with iron oxide pigments that will not fade with extended UV exposure.

Ease of Installation

- Joints and surfaces meet ADA gap and lippage requirements.
- Designed to be installed with 3/8 in mortar joints.

Aesthetics

 Smooth and rounded surfaces are ideal for bare feet







Note: Unit color, dimensions, weight, and availability varies by manufacturer.

PEDESTRIAN

PATIOS

POOL DECKS









INSTALLATION INSTRUCTIONS


STEP 1: Clean concrete bond beam or concrete slab surfaces to be free of dirt, oils or other contaminant's prior to placement of bedding material for the Coping Stone.

STEP 2: Coping Stone is placed on a setting bed over a prepared subbase, concrete bond beam or concrete slab. Use of sand, bitumen, mortar and adhesive are applicable as bedding agents.


STEP 3: Place Coping Stone as per plans and drawings. Joints may be filled with sand or mortar. Take care to remove mortar on top surfaces of Coping Stone prior to mortar the joint material setting up. Rake joints to required depth. Do use acid based cleaners.


STEP 4: Coping units shall be level from unit to unit. Pool coping applications may require a sealant between the paving joints and adjacent pool deck pavement materials.

NOTE: Colors are shown as accurately as possible in brochures and samples, but due to the nature of the product, regional color differences and variables in print reproduction, colors may not match exactly. For best results in maintaining color consistency, pavers must be installed from several cubes at a time. Efflorescence, a whitish, powder-like deposit, may appear on concrete pavers. This is a natural occurrence in any concrete product and will usually wear off over time.

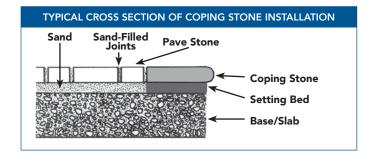

INSTALLATION PATTERNS





Pool Coping

Complete installation and specification details are available by contacting your Keystone Hardscapes Sales Representative.



www.keystonehardscapes.com

