



VENETIAN®

PAVERS





VENETIAN®

The Venetian® Stone's uniquely attractive cleft surface sets it apart from other pavement treatments, while its texture resembles Old World charm and invokes a traditional convention. The larger scale units lend themselves to stately residential settings and more expansive commercial applications while the modular pattern equalizes the scale of any project and is fitting to most any architectural element.

UNITS



#251 - 6x6 45mm



#254 - 6x6 60mm



#246 - 6x6 80mm



#252 - 6x9 45mm



#255 - 6x9 60mm



#269/#256** - 6x12 60mm



#248 - 6x12 80mm



#270 - 12x12 60mm



#249 - 12x12 80mm



#265 - 12x18 60mm

BUNDLED



#262 - 2-pc Combo 45mm

BUNDLED



#267/#258** - 2-pc Combo 60mm

BUNDLED



#247 - 2-pc Combo 80mm

BUNDLED



Stone A



Stone B



Stone C




Stone D



Stone E

#369 - Venetian Flag

Before specifying a specific product, please confirm availability with your local Keystone Hardscapes producer.

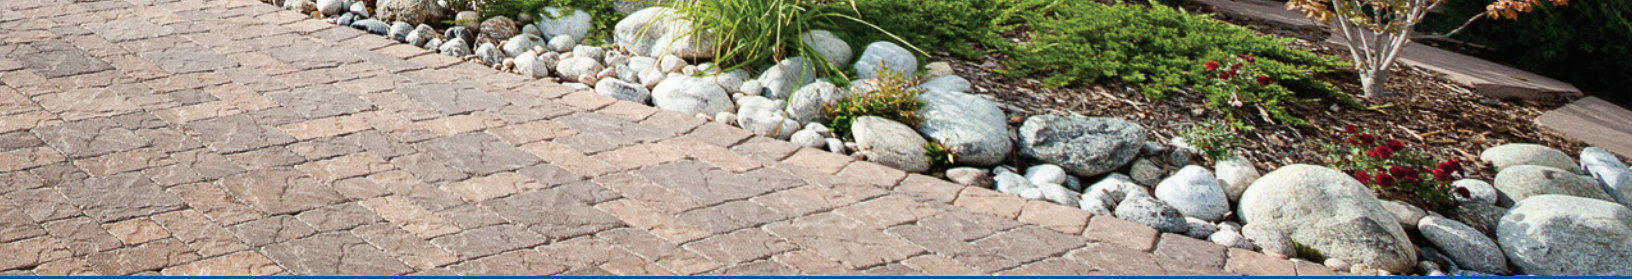

UNIT DIMENSIONS

PRODUCT	DIMENSIONS			APPLICATION	PRODUCT #
	Width	Length	Height		
6x6 45mm	5.91" 150mm	5.91" 150mm	1.77"* 45mm	Light ²	251
6x6 60mm	5.91" 150mm	5.91" 150mm	2.36" 60mm	Light ²	254
6x6 80mm	5.91" 150mm	5.91" 150mm	3.15" 80mm	Heavy ⁴	246
6x9 45mm	5.91" 150mm	8.86" 225mm	1.77"* 45mm	Light ²	252
6x9 60mm	5.91" 150mm	8.86" 225mm	2.36" 60mm	Light ²	255
6x12 60mm	5.91" 150mm	11.81" 300mm	2.36" 60mm	Light ²	269, 256**
6x12 80mm	5.91" 150mm	11.81" 300mm	3.15" 80mm	Medium ³	248
12x12 60mm	11.81" 300mm	11.81" 300mm	2.36" 60mm	Light ²	270
12x12 80mm	11.81" 300mm	11.81" 300mm	3.15" 80mm	Light ²	249
12x18 60mm	11.81" 300mm	17.72" 450mm	2.36" 60mm	Pedestrian ¹	265

PRODUCT		DIMENSIONS			APPLICATION	PRODUCT #
		Width	Length	Height		
2-pc Combo 45mm	6x6	5.91" 150mm	5.91" 150mm	1.77"* 45mm	Light ²	262
	6x9	5.91" 150mm	8.86" 225mm			
2-pc Combo 60mm	6x6	5.91" 150mm	5.91" 150mm	2.36" 60mm	Light ²	267, 258**
	6x9	5.91" 150mm	8.86" 225mm			
2-pc Combo 80mm	6x6	5.91" 150mm	5.91" 150mm	3.15" 80mm	Heavy ⁴	247
	6x9	5.91" 150mm	8.86" 225mm			
Flag 60mm	A	18.00" 457.2mm	24.00" 609.6mm	2.36" 60mm	Pedestrian ¹	369*
	B	18.00" 457.2mm	24.00" 609.6mm			
	C	18.00" 457.2mm	24.00" 609.6mm			
	D	18.00" 457.2mm	12.00" 304.8mm			
	E	18.00" 457.2mm	12.00" 304.8mm			

* Not for use in vehicular applications.

** Item not available at all locations. Special unit per pallet count.

FEATURES & BENEFITS

Perfect For:


- Suitable for multiple applications. **See chart above.**
- Made of durable concrete with iron oxide pigments that will not fade with extended UV exposure. Meets or exceeds applicable requirements of ASTM C936 and C1782.

Ease of Installation

- Joints and surfaces are designed to create a natural look and minimize furniture wobble.

Aesthetics

- Riven stone surfaces and chamferless edges create the striking shadow lines and textures of dimensioned flagstone.

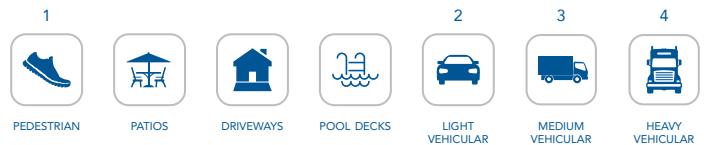

Note: Unit color, dimensions, weight, and availability varies by manufacturer.





INSTALLATION INSTRUCTIONS

STEP 1: Excavate unsuitable, unstable or unconsolidated subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for base material - typically minimum 4-8 inches thick (101.6mm - 203.2mm). Compact base to optimum moisture/density or as otherwise directed by Site Engineer/Architect/Landscape Architect.

STEP 2: Place bedding course of washed sand conforming to the grading requirements of ASTM C 33 to a maximum uniform depth of 1-1½ inch (25-38mm). Screed to the grade and profile required.


STEP 3: Install Venetian with joints to a nominal 1/8 inch (3mm).

STEP 4: Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaged edges.

STEP 5: Use a low-amplitude plate compactor capable of at least minimum of 4,000 lbf (18 kN) at a frequency of 75-100 Hz to vibrate the pavers into the sand. Remove any cracked or damaged pavers and replace with new units.

STEP 6: Post compaction, spread and sweep dry ASTM C 33 or ASTM C 144 sand over the entire paving area.

STEP 7: Make one more pass with the plate compactor to completely fill the joints with sand.

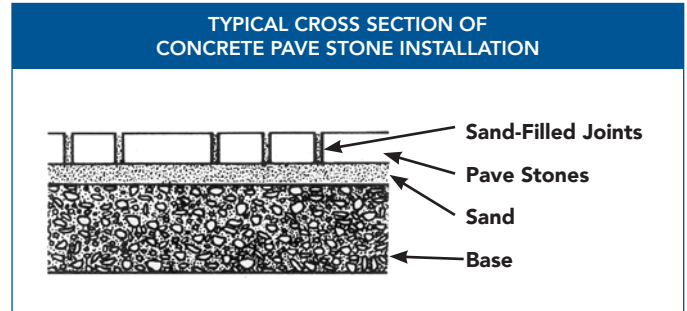


STEP 8: Sweep paver surface clean for final acceptance by owner/owner's agent.

NOTE: Colors are shown as accurately as possible in brochures and samples, but due to the nature of the product, regional color differences and variables in print reproduction, colors may not match exactly. For best results in maintaining color consistency, pavers must be installed from several cubes at a time. Efflorescence, a whitish, powder-like deposit, may appear on concrete pavers. This is a natural occurrence in any concrete product and will usually wear off over time.

Complete installation and specification details are available by contacting your Keystone Hardscapes Sales Representative.

INSTALLATION PATTERNS

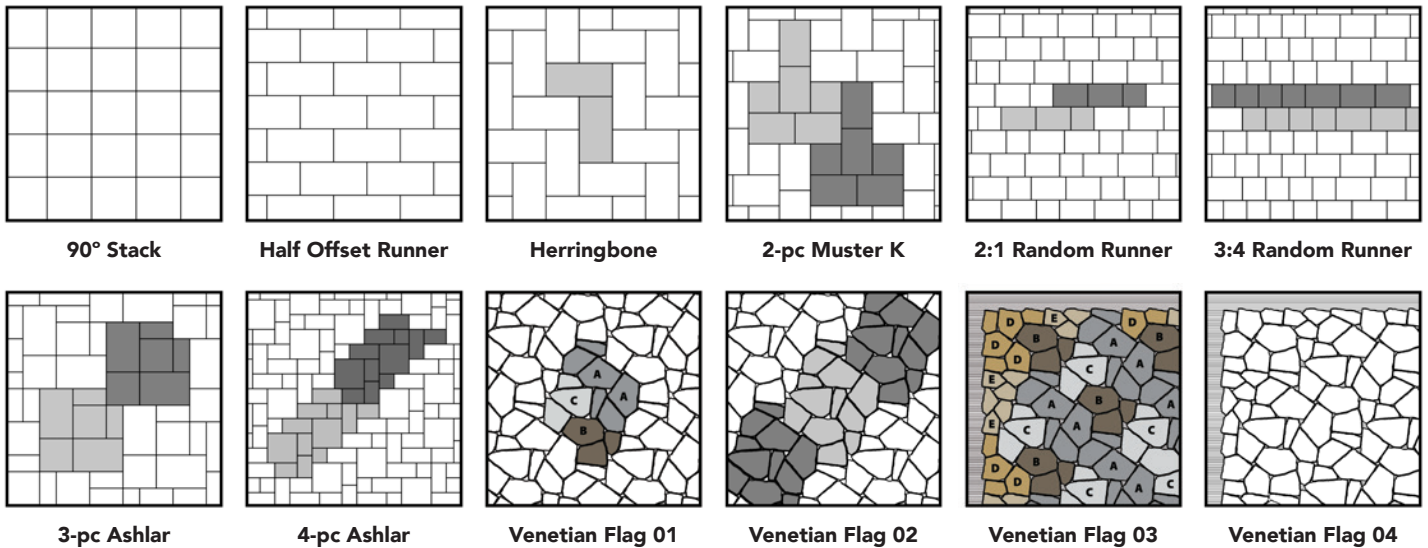

www.keystonehardscapes.com

© 2021 The QUIKRETE Companies – KHS 06/2021

FOLLOW US

