




PAVERS

CITYSTONE™ Demi & Supra

Joint patterns are what give the CityStone series its recognizable surface texture and classic appeal. CityStone is a proven paver on projects including patios, sidewalks, and plazas. This contemporary paver creates a timeless design with enduring beauty and durability.

UNITS

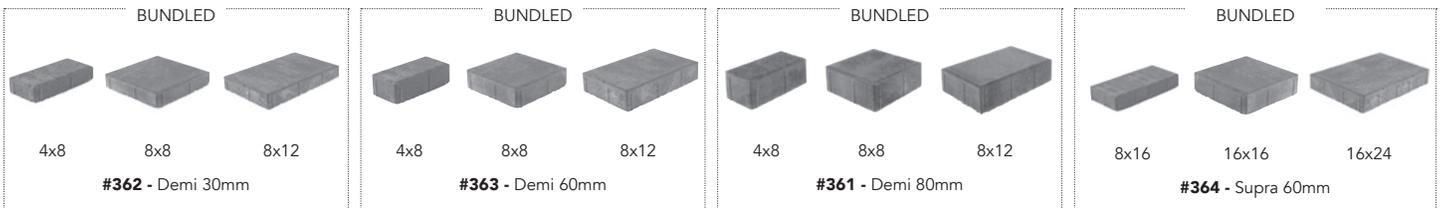

Before specifying a specific product, please confirm availability with your local Keystone Hardscapes producer.

UNIT DIMENSIONS

PRODUCT		DIMENSIONS			APPLICATION	PRODUCT #
		Width	Length	Height		
Demi 30mm	4x8	7.87" 200mm	3.94" 100mm	1.18" 30mm	Pedestrian ¹	362
	8x8	7.87" 200mm	7.87" 200mm			
	8x12	7.87" 200mm	11.81" 300mm			
Demi 60mm	4x8	7.87" 200mm	3.94" 100mm	2.36" 60mm	Light ²	363
	8x8	7.87" 200mm	7.87" 200mm			
	8x12	7.87" 200mm	11.81" 300mm			

PRODUCT		DIMENSIONS			APPLICATION	PRODUCT #
		Width	Length	Height		
Demi 80mm	4x8	7.87" 200mm	3.94" 100mm	3.15" 80mm	Heavy ³	361
	8x8	7.87" 200mm	7.87" 200mm			
	8x12	7.87" 200mm	11.81" 300mm			
Supra 60mm	8x16	15.75" 400mm	7.87" 200mm	2.36" 60mm	Pedestrian ¹	364
	16x16	15.75" 400mm	15.75" 400mm			
	16x24	15.75" 400mm	23.62" 600mm			

FEATURES & BENEFITS

Perfect For:

- Suitable for multiple applications. **See chart above.**
- Made of durable concrete with iron oxide pigments that will not fade with extended UV exposure. Meets or exceeds applicable requirements of ASTM C936 and C1782.

Ease of Installation

- Joints and surfaces are designed to create a natural look and minimize furniture wobble.

Aesthetics

- Smooth surfaces and finely chamfered edges combine to create a sleek and contemporary look.

Note: Unit color, dimensions, weight, and availability varies by manufacturer.



PATIOS



DRIVEWAYS



POOL DECKS



PEDESTRIAN



LIGHT VEHICULAR



HEAVY VEHICULAR



INSTALLATION INSTRUCTIONS

STEP 1: Excavate unsuitable, unstable or unconsolidated subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for base material - typically minimum 4-8 inches thick (101.6mm - 203.2mm). Compact base to optimum moisture/density or as otherwise directed by Site Engineer/Architect/Landscape Architect.

STEP 2: Place bedding course of washed sand conforming to the grading requirements of ASTM C 33 to a maximum uniform depth of 1-1½ inch (25-38mm). Screed to the grade and profile required.

STEP 3: Install ADA pavers with joints to a nominal ⅛ inch (3mm).

STEP 4: Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaged edges.


STEP 5: Use a low-amplitude plate compactor capable of at least minimum of 4,000 lbf (18 kN) at a frequency of 75-100 Hz to vibrate the pavers into the sand. Remove any cracked or damaged pavers and replace with new units.

STEP 6: Post compaction, spread and sweep dry ASTM C 33 or ASTM C 144 sand over the entire paving area.


STEP 7: Make one more pass with the plate compactor to completely fill the joints with sand.

STEP 8: Sweep paver surface clean for final acceptance by owner/owner's agent.


NOTE: Colors are shown as accurately as possible in brochures and samples, but due to the nature of the product, regional color differences and variables in print reproduction, colors may not match exactly. For best results in maintaining color consistency, pavers must be installed from several cubes at a time. Efflorescence, a whitish, powder-like deposit, may appear on concrete pavers. This is a natural occurrence in any concrete product and will usually wear off over time.

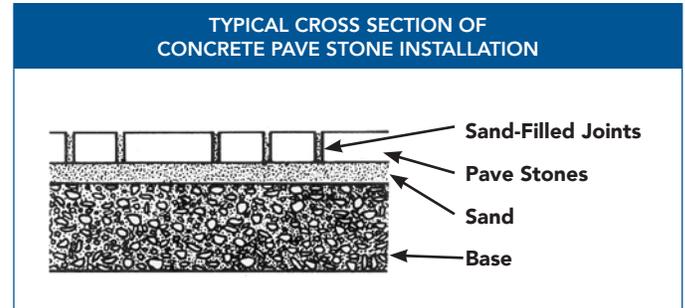


INSTALLATION PATTERNS



3-pc Ashlar 01



3-pc Ashlar 02



3-pc Random Runner

Complete installation and specification details are available by contacting your Keystone Hardscapes Sales Representative.



www.keystonehardscapes.com

© 2021 The QUIKRETE Companies – KHS 06/2021

FOLLOW US