


## ECO-CITYLOCK® 5X10 80MM

PRODUCT NUMBER # 315

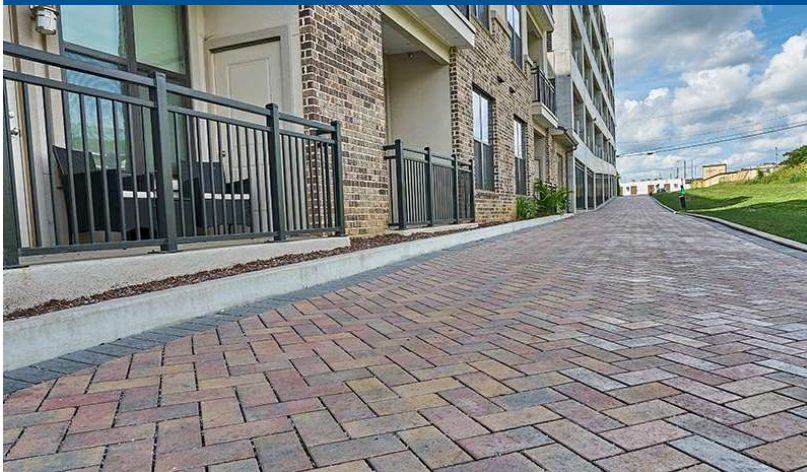

- Smooth surfaces and finely chamfered edges combine to create a sleek and contemporary look
- Versatile 2:1 shape easily forms stacked, runner, basketweave, and herringbone patterns
- Heavy duty vehicular applications
- Initial infiltration rate exceeds 700 in/hour per ASTM C1781.
- Made of durable concrete with iron oxide pigments which helps prevent fading from extended UV exposure.

The CityLock series of standard and permeable pavers includes a wide range of shapes to suit most site pavement conditions. All CityLock units share a common joint design which increases design versatility while also helping installation patterns maintain their bond lines. Each unit features fine chamfers which create a contemporary aesthetic and smooth rolling surface. Sleek and innovative, CityLock units are ideal for architectural purposed applications.

### STONE(S)



#### 5x10

<b>Height</b>	<i>in</i>	3.15
	<i>mm</i>	80
<b>Length</b>	<i>in</i>	10
	<i>mm</i>	254
<b>Width</b>	<i>in</i>	5
	<i>mm</i>	127
<b>Units</b>	<i>/pl</i>	280

### PALLET INFO

<b>Pallet Weight</b>	3612 lbs
<b>Sq Ft/Pallet</b>	97 sq.ft.