



CITYSTONE™

PAVERS



CITYSTONE™

Joint patterns are what give the CityStone series its recognizable surface texture and classic appeal. CityStone is a proven paver on projects including patios, sidewalks, and plazas. This paver creates a timeless design with enduring beauty and durability.

UNITS



#213 - 4x4 60mm



#666 - 6x6 60mm



#668 - 6x6 80mm




#297 - 6x9 60mm



#298 - 6x9 80mm



#257 - 8x8 60mm



#259 - 8x8 80mm



#383 - 8x12 60mm



#281 - 9x9 60mm



#380 - 3x12 60mm



#287 - 6x12 60mm



#289/#288** - 6x12 80mm



#276 - 12x12 30mm



#277 - 12x12 60mm



#279 - 12x12 80mm



#384 - 12x24 60mm



#385 - 24x24 60mm

BUNDLED



3x6

6x6

#296 - 2-pc Combo 60mm

BUNDLED



4x8

8x8

8x12

#362 - Demi 30mm

BUNDLED



4x8

8x8

8x12

#363 - Demi 60mm

BUNDLED



4x8

8x8

8x12

#361 - Demi 80mm

BUNDLED



8x16

16x16

16x24

#364 - Supra 60mm

Before specifying a specific product, please confirm availability with your local Keystone Hardscapes producer.

UNIT DIMENSIONS

PRODUCT	DIMENSIONS			APPLICATION	PRODUCT #
	Width	Length	Height		
4x4 60mm	3.94" 100mm	3.94" 100mm	2.36" 60mm	Light ²	213
6x6 60mm	5.91" 150mm	5.91" 150mm	2.36" 60mm	Light ²	666
6x6 80mm	5.91" 150mm	5.91" 150mm	3.15" 80mm	Heavy ¹	668
6x9 60mm	5.91" 150mm	8.86" 225mm	2.36" 60mm	Light ²	297
6x9 80mm	5.91" 150mm	8.86" 225mm	3.15" 80mm	Heavy ¹	298
8x8 60mm	7.87" 200mm	7.87" 200mm	2.36" 60mm	Light ²	257
8x8 80mm	7.87" 200mm	7.87" 200mm	3.15" 80mm	Heavy ¹	259
8x12 60mm	7.87" 200mm	11.8" 300mm	2.36" 60mm	Light ²	383
9x9 60mm	8.86" 225mm	8.86" 225mm	2.36" 60mm	Light ²	281
3x12 60mm	2.95" 75mm	11.80" 300mm	2.36" 60mm	Pedestrian ¹	380
6x12 60mm	5.91" 150mm	11.81" 300mm	2.36" 60mm	Light ²	287
6x12 80mm	5.91" 150mm	11.81" 300mm	3.15" 80mm	Medium ³	289/288**
12x12 30mm	11.81" 300mm	11.81" 300mm	1.18" 30mm	Pedestrian ¹	276
12x12 60mm	11.81" 300mm	11.81" 300mm	2.36" 60mm	Light ²	277
12x12 80mm	11.81" 300mm	11.81" 300mm	3.15" 80mm	Medium ³	279
12x24 60mm	12.00" 300mm	24.00" 600mm	2.36" 60mm	Pedestrian ¹	384

PRODUCT		DIMENSIONS			APPLICATION	PRODUCT #
		Width	Length	Height		
24x24 60mm		24.00" 600mm	24.00" 600mm	2.36" 60mm	Pedestrian ¹	385
2-pc Combo 60mm	3x6	5.91" 150mm	2.96" 75mm	2.36" 60mm	Light ²	296
	6x6	5.91" 150mm	5.91" 150mm			
Demi 30mm	4x8	7.87" 200mm	3.94" 100mm	1.18" 30mm	Pedestrian ¹	362
	8x8	7.87" 200mm	7.87" 200mm			
	8x12	7.87" 200mm	11.81" 300mm			
Demi 60mm	4x8	7.87" 200mm	3.94" 100mm	2.36" 60mm	Light ²	363
	8x8	7.87" 200mm	7.87" 200mm			
	8x12	7.87" 200mm	11.81" 300mm			
Demi 80mm	4x8	7.87" 200mm	3.94" 100mm	3.15" 80mm	Heavy ³	361
	8x8	7.87" 200mm	7.87" 200mm			
	8x12	7.87" 200mm	11.81" 300mm			
Supra 60mm	8x16	15.75" 400mm	7.87" 200mm	2.36" 60mm	Pedestrian ¹	364
	16x16	15.75" 400mm	15.75" 400mm			
	16x24	15.75" 400mm	23.62" 600mm			

*Not suitable for commercial parking lots.

** Item not available at all locations. Special unit per pallet count.

FEATURES & BENEFITS

Perfect For:

- Suitable for multiple applications.
See chart above.
- Made of durable concrete with iron oxide pigments that will not fade with extended UV exposure. Meets or exceeds applicable requirements of ASTM C936 and C1782.

Ease of Installation

- Joints and surfaces are designed to create a natural look and minimize furniture wobble.

Aesthetics

- Smooth surfaces and finely chamfered edges combine to create a sleek and contemporary look.



Note: Unit color, dimensions, weight, and availability varies by manufacturer.





INSTALLATION INSTRUCTIONS

STEP 1: Excavate unsuitable, unstable or unconsolidated subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for base material - typically minimum 4-8 inches thick (101.6mm - 203.2mm). Compact base to optimum moisture/density or as otherwise directed by Site Engineer/Architect/Landscape Architect.

STEP 2: Place bedding course of washed sand conforming to the grading requirements of ASTM C 33 to a maximum uniform depth of 1-inch (25.4mm). Screed to the grade and profile required.

STEP 3: Install CityStone with joints to a nominal $\frac{1}{8}$ inch (3mm).

STEP 4: Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaged edges.


STEP 5: Use a low-amplitude plate compactor capable of at least minimum of 4,000 lbf (18 kN) at a frequency of 75-100 Hz to vibrate the pavers into the sand. Remove any cracked or damaged pavers and replace with new units.

STEP 6: Post compaction, spread and sweep dry ASTM C 33 or ASTM C 144 sand over the entire paving area.


STEP 7: Make one more pass with the plate compactor to completely fill the joints with sand.

STEP 8: Sweep paver surface clean for final acceptance by owner/owner's agent.

NOTE: Colors are shown as accurately as possible in brochures and samples, but due to the nature of the product, regional color differences and variables in print reproduction, colors may not match exactly. For best results in maintaining color consistency, pavers must be installed from several cubes at a time. Efflorescence, a whitish, powder-like deposit, may appear on concrete pavers. This is a natural occurrence in any concrete product and will usually wear off over time.

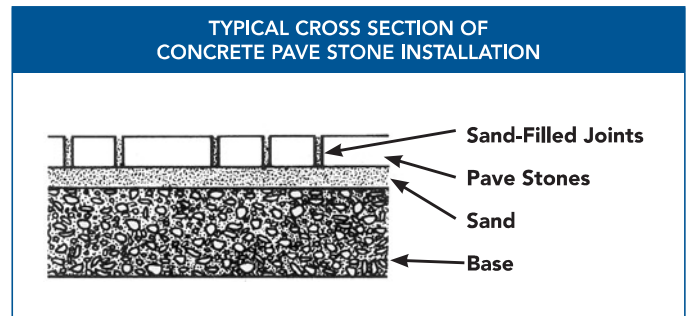


INSTALLATION PATTERNS

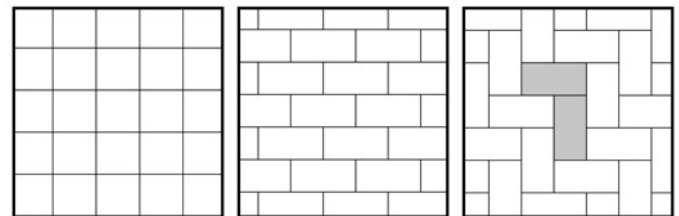

90° Stack

Half Offset Runner

Herringbone

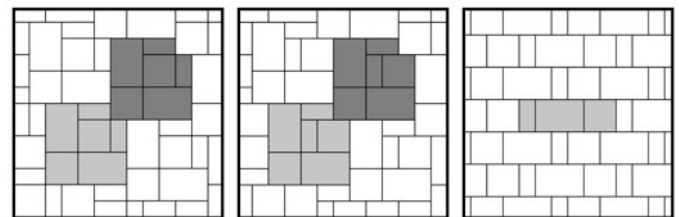

3-pc Ashlar 01

3-pc Ashlar 02

3-pc Random Runner

Complete installation and specification details are available by contacting your Keystone Hardscapes Sales Representative.



www.keystonehardscapes.com

© 2021 The QUIKRETE Companies – KHS 06/2021

FOLLOW US

