

SureRack™

XFIIRE™

Features

- Double the heating capacity of your boiler or water heater without doubling your footprint with the XFIIRE™ SureRack™ Vertical Racking system
- Packaged disassembled for easy transportation and mobility at the job site
- Simple Assembly
- Heavy-Duty construction with powder coated finish
- Indoor/Outdoor



Hi Delta®

Features

- Double the heating capacity of your boiler or water heater without doubling your footprint with the Hi Delta® SureRack™ Vertical Racking system
- Packaged disassembled for easy transportation and mobility at the job site
- Simple Assembly
- Heavy-Duty construction with powder coated finish
- Indoor/Outdoor





Learn more at
Raypak.com

SureRack™ FOR XFIIRE™ & Hi Delta®

XFIIRE™

XFIIRE Model	SureRack Kit					Approx Unit Weight Dry Lbs. (Kg)	Stacked Boiler Height in. (mm)
	Part No.	Approx. Weight Lbs. (Kg)	Dimensions in. (mm)				
			A	B	C		
300	100-10000609	266 (1207)	36.83 (935)	41.3 (1049)	46.4 (1179)	371 (168)	86.61 (2200)
400						390 (177)	
500						457 (207)	
650	100-10000612	286 (1295)	45.25 (1149)	49.8 (1265)		499 (226)	
800						565 (256)	
1000	100-10000608	296 (1344)	50.0 (127)	54.5 (1384)			


XFIIRE Model	Anchoring Dimensions in. (mm)		
	A	B	C
300	27.8 (707)	30.5 (775)	5 (127)
400			
500			
650	39.7 (1008)		
800			
1000	44.5 (1130)		

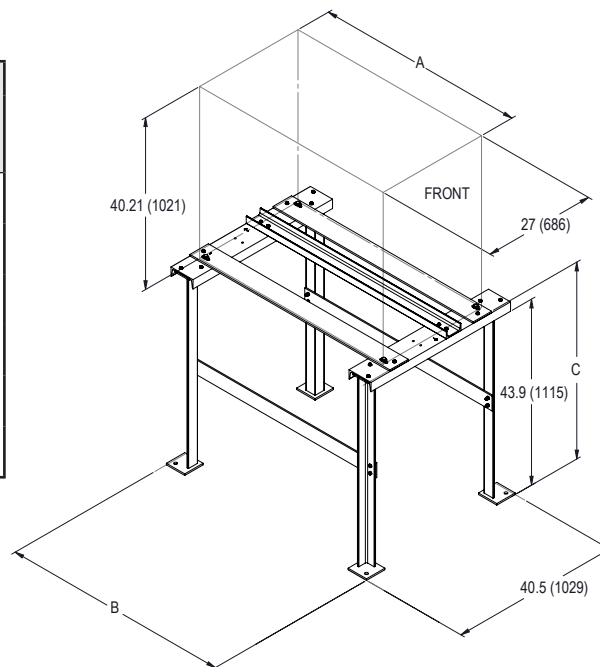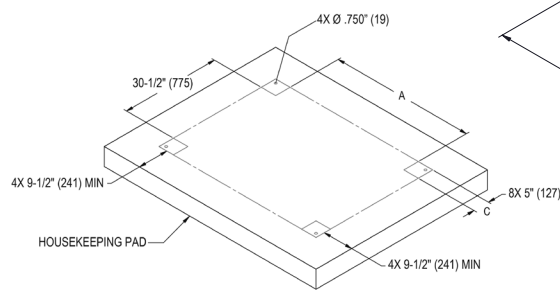

Hi Delta®

Hi Delta Model	Anchoring Dimensions in. (mm)		
	A	B	C
302C	34.28 (870.9)	22.70 (577)	3.50 (89)
402C	41.28 (1048.7)		
502C	48.28 (1226.5)		
652C	58.78 (1493.2)		
752C	65.78 (1671)		
902C	76.28 (1937)	30.81 (782.3)	3.5 (88.9)
992C	55.62 (1412)		
1262C	66.94 (1700)		
1532C	78.28 (1988)		
1802C	89.6 (2276)		
2002C	100.97 (2565)		
2072C			
2342C	112.31 (2853)		

Hi Delta Model	SureRack Kit (X-1)						Approx Unit Weight Dry Lbs.	Above-Grade Add-On (X-2)	Stacked Boiler Height in. (mm)	
	Part No.	Weight Lbs. (Kg)	Dimensions in. (mm)			Cross Beams				
			A	B	C					W
302C	6906	201 (91.2)	30 (762)	42.8 (1087)	37.75	CTR.	3	380	P/N 011919	72.25 (1835)
402C	6907	214 (97.1)		49.8 (1265)				445		
502C	6908	228 (103.4)		56.8 (1442)				545		
652C	6909	257 (116.6)		67.3 (1709)				590		
752C	6910	265 (120.2)		74.3 (1887)				675		
902C	6911	276 (125.2)		84.8 (2154)				74		
992C	11563	340 (154.2)	38 (965)	64.12 (1629)	45.94	16.81 (427)	4	900	P/N 011920	82.50 (2096)
1262C	11564	361 (163.7)		75.5 (1918)		20.57 (522)		1010		
1532C	11565	371 (168.3)		86.78 (2210)		24.38 (619)		1225		
1802C	11566	408 (185)		98.13 (2492)		28.13 (715)		1350		
2002C	11567	428 (194.1)		109.5 (2781)		31.94 (811)		1450		
2072C	11567	428 (194.1)		109.5 (2781)		31.94 (811)		1450		
2342C	11568	458 (207.7)		120.81 (3073)		35.69 (907)		1520		

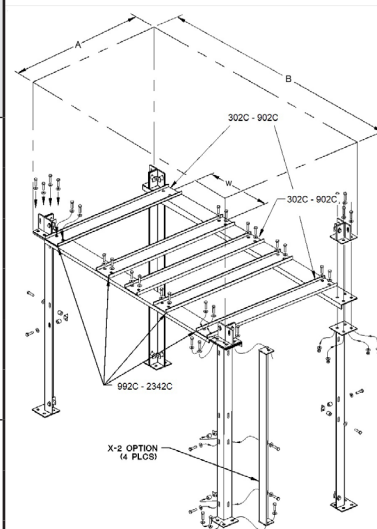

NOTE: The Hi-Delta SureRack is designed to connect to the lower unit to provide lateral bracing. Raypak cannot support using a SureRack as a platform to elevate an upper unit with no lower unit.