

resilience[®]
E Series

Revolutionary
in-line salt
chlorinator for
pools

sölaxx
WATER TREATMENT SOLUTIONS



*Patents Pending


Resilience E - Natural Salt Chlorinator

Unique Features:

- Simplest installation in the market
- Designed to work with variable speed pumps
- Bi-directional flow sensor
- Double "low flow" protection
- Full range input voltage 110-220 Vac
- Built in salinity and water temperature sensors
- Replaceable electrolysis cartridge

Control Panel Display:

- 24 hours super chlorination mode
- Service and maintenance built in alerts
- 4 button operation
- Cell life low LED indicator
- Clean cell identification and alert

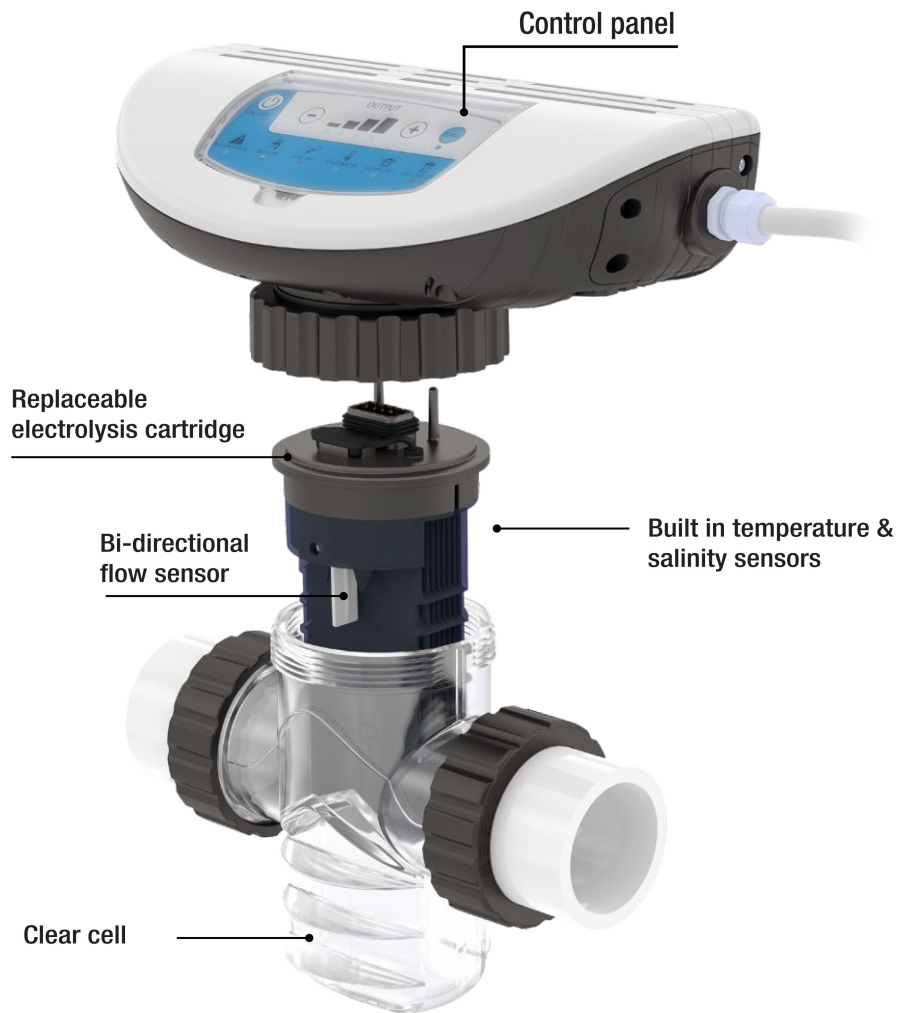

Choosing the Correct Cell Model for Pool Size

Cell Model	E 40
Maximum pool size	40,000 Gallons
Chlorine Output	1.4 lb/day

* Maximum pool size is subjected to using Cyanuric acid to balance pool water.

* Suitable for private pools!

* In special pools (Overflow pools, Lap pools, , Hydrotherapy pools, Public/Commercial pools) or in cases of heightened chlorine demand (such as warmer climates, high bathers load, etc.), it is recommended to choose a larger model.

Standards & Certifications

ISO 9001:2015	International
ISO 14001:2015	International
IP66	International
UL	U.S.A
CE	Europe

