

BADU[®] Pro

Variable Speed Pumps

SPECK X
pumps

Welcome to the next level of replacement pump. Not only does the BADU[®] Pro fit directly up to the majority of the installed pump base in the U.S., it now, uniquely, talks to their automation too.

- Directly Replaces the Majority of Pumps on the Market
- Available with our Universal Automation Control Board for Seamless Communication with all Major Equipment Manufacturers.
- 1.65, 2.25, 2.7 & 3.45 THP VS



BADU[®] Pro-V UVS (2.7THP)
(WEF: 7.8, HHP: 1.405)



*Proudly Assembled
in the USA*

WE BRING WATER TO LIFE![®]

8125 Bayberry Road
Jacksonville, FL 32256 USA
info.usa@speck-pumps.com

Toll Free 800.223.8538
Telephone 904.739.2626
usa.speck-pumps.com

BADU® Pro UVS Series

Self-Priming High Flow Pump



Our flagship pump, the BADU® Pro was designed with pool service pros in mind. A drop-in replacement for both the Hayward® Super Pump® and Pentair® SuperFlo®, WhisperFlo®, it not only replaces the majority of pumps on the market, but also communicates with their automation.



BADU Pro-III

Features


- Easily serviceable 4-bolt design & handle
- Lid lock ring that incorporates handles. These handles provide the user with a convenient way to easily remove the lid.
- Suction and Discharge comes equipped with quick disconnect unions as well as internal threads for easy installation and maintenance.
- Every pump is wet tested before leaving the Speck factory.
- All variable speed models are equipped with an LED light in the basket lid, for ease of maintenance.
- The 1.65, 2.25, 2.7, and 3.45 models are additionally available with our **Universal Automation Control Board**, allowing for seamless communication with all major equipment manufacturers.
- Optional Communication Cable available for use with universal automation control boards (part# 7155001113A).
- The 1.65, 2.25, 2.7, and 3.45 THP variable speeds also come with discrete switch inputs, for easy connection to automation.
- The models use our Cyclam 20mm seal, allowing the pump to run dry for up to an hour.
- Some models can be ordered with 1.5" or 2.0" fittings.
- Pump includes riser allows for direct replacement of WhisperFlo® and IntelliFlo® models.

Trademarks and Certifications



Select Models are ENERGY STAR certified

Performance Curves

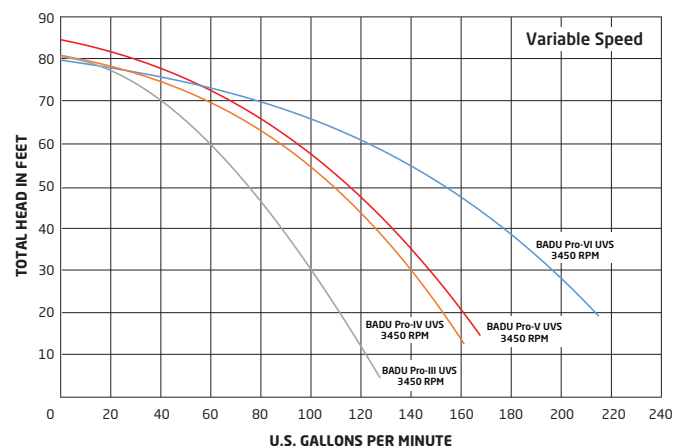

Part Numbers

Variable Speed (TEFC Motor) - Energy Star

| Order # | Model # | THP | WEF | HHP | Volts | Amps | Port Size | Weight* (lbs.) |
|------------------------|--------------|------|-----|-------|---------|----------|-----------|----------------|
| Standard Models | | | | | | | | |
| IG385-V165T-OUS | BADU Pro-III | 1.65 | 8.4 | 0.871 | 115/230 | 13.6/6.8 | 1.5" | 44 |
| IG385-V165T-TUS | BADU Pro-III | 1.65 | 8.8 | 0.940 | 115/230 | 13.6/6.8 | 2.0" | 44 |
| IG385-V225T-TUS | BADU Pro-IV | 2.25 | 7.6 | 1.354 | 230 | 9.5 | 2.0" | 45 |
| IG385-V270T-TUS | BADU Pro-V | 2.7 | 7.8 | 1.405 | 230 | 11.1 | 2.0" | 48 |
| IG385-V345T-TUS | BADU Pro-VI | 3.45 | 6.8 | 1.558 | 230 | 14.0 | 2.0" | 50 |

Models with Universal Automation Control Board

| | | | | | | | | |
|-----------------|--------------|------|-----|-------|---------|----------|------|----|
| IG385-V165T-OCB | BADU Pro-III | 1.65 | 8.4 | 0.871 | 115/230 | 13.6/6.8 | 1.5" | 44 |
| IG385-V165T-TCB | BADU Pro-III | 1.65 | 8.8 | 1.042 | 115/230 | 13.6/6.8 | 2.0" | 44 |
| IG385-V225T-TCB | BADU Pro-IV | 2.25 | 7.6 | 1.354 | 230 | 9.5 | 2.0" | 45 |
| IG385-V270T-TCB | BADU Pro-V | 2.7 | 7.8 | 1.405 | 230 | 11.1 | 2.0" | 48 |
| IG385-V345T-TCB | BADU Pro-VI | 3.45 | 6.8 | 1.558 | 230 | 14.0 | 2.0" | 50 |

NOTE: The BADU Pro-IV (2.25 THP) and BADU Pro-VI (3.45 THP) Models are not listed on Energy Star.

*Estimated Shipping Weights

Hayward® & Super Pump® are trademarks and/or registered trademarks of Hayward Industries, Inc.

Pentair®, SuperFlo®, WhisperFlo®, and IntelliFlo® are trademarks and/or registered trademarks of Pentair Water Pool and Spa, Inc. and/or its affiliated companies.

8125 Bayberry Road, Jacksonville, Florida 32256 USA | Phone: (904) 739-2626 | Website: usa.speck-pumps.com

Rev. 02/2025