

# Normblock Multi Series


**SPECK** 

*All Polyurethane Pump 1750 RPM  
(7.5, 10, 15, 20, 25 & 30 HP)*

*Redefining the limits of plastic pumps. The Normblock Multi takes the non-corrosive and lightweight benefits of plastic higher than any other American manufacturer.*

## Features

- This pump has a robust horizontal single stage design.
- Superior slow (1750 rpm) running design reduces vibrations, resulting in quiet operation.
- The housing is made of high performance, corrosion resistant polyurethane.
- Heavy duty, energy efficient, totally enclosed fan cooled (TEFC) motor, Class F insulation, protection class IP 55. Sealed ball bearings need no lubrication.
- Shaft coupling allows motor to be replaced without replacing mechanical seal.
- A high wear, rugged Carbon/SiC - EPDM mechanical seal allows for long life and long maintenance intervals.
- SiC/SiC seals available for marine applications.
- Various suction flange options available including 4", 5", 6" and 8" for most models.
- Optional 4", 6" and 8" strainer tanks for horizontal flooded suction applications.
- Impeller shaves available for exact duty points with minimal turnaround time.
- Every pump is tested to factory & customer specifications, with comprehensive individualized test results.

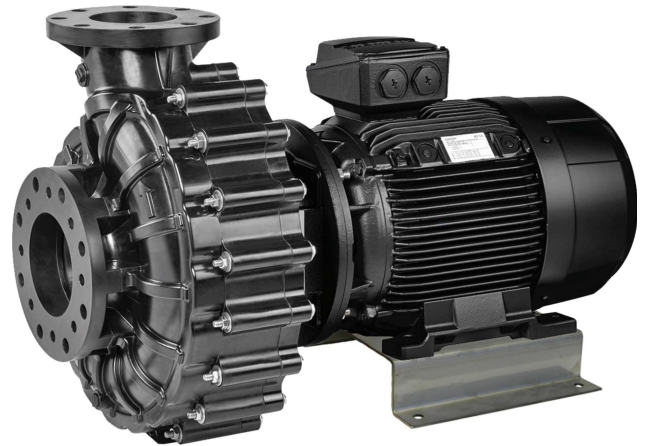


*Normblock Multi 125/250*

## Trademarks and Certifications



## Performance Curves

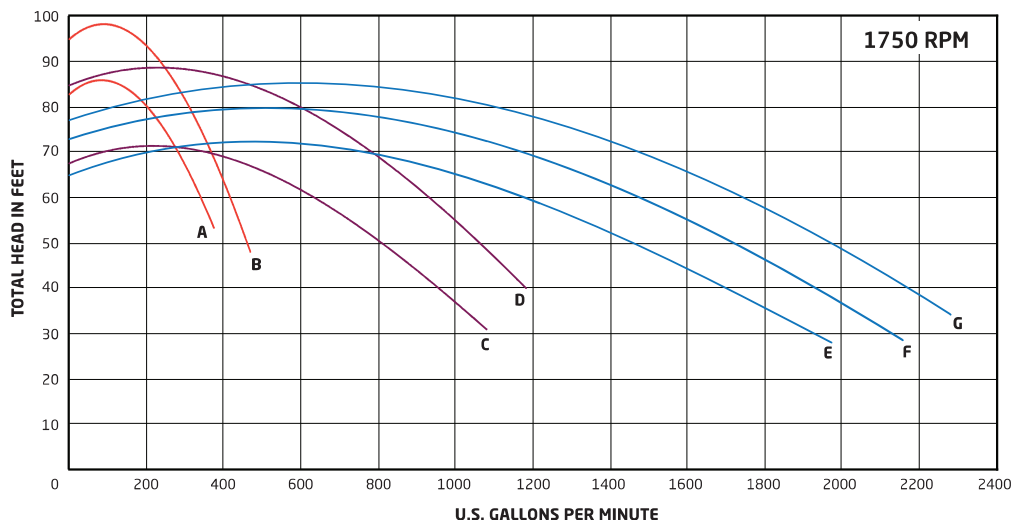

- A. Normblock Multi 65/250** (Ø 225mm) - 7.5 HP S.F. 1.25  
**B. Normblock Multi 65/250** (Ø 240mm) - 10.0 HP S.F. 1.25  
**C. Normblock Multi 100/250** (Ø 220mm) - 15.0 HP S.F. 1.25  
**D. Normblock Multi 100/250** (Ø 240mm) - 20.0 HP S.F. 1.25

- E. Normblock Multi 125/250** (Ø 235mm) - 20.0 HP S.F. 1.25  
**F. Normblock Multi 125/250** (Ø 245mm) - 25.0 HP S.F. 1.15  
**G. Normblock Multi 125/250** (Ø 255mm) - 30.0 HP S.F. 1.15