

MODEL 95-VIII

Plastic Commercial Pool Pump



Features

- Largest one-piece housing design with integrated strainer basket and easy on/off two piece lid.
- Quiet and efficient medium head pump performance.
- This high performance pump comes complete with our unique mechanical shaft seal that allows the pump, if mistreated, to run dry for up to one hour.
- The pump can be used for pool water with a salt concentration of up to 5000 ppm.
- Suction and discharge are equipped with 4" quick disconnect unions for easy installation and maintenance.
- Wrench for unions and lid is included with each pump. Flanges are available on request.
- 56 Frame, ODP (open drip proof) motor to achieve the ideal combination of value, performance and reliability.
- Available in single phase and 2-speed configurations for increased energy savings.
- Motor is easy to remove without disturbing the plumbing. Reusable o-rings throughout.
- Two year warranty on the motor and all pump parts, including normal wear of the mechanical seal.
- Every pump is performance tested before leaving the Speck factory.




Model 95-VIII




Applications

- In-ground pools
- High rate sand filter applications
- Water Features

Dimensional Drawing

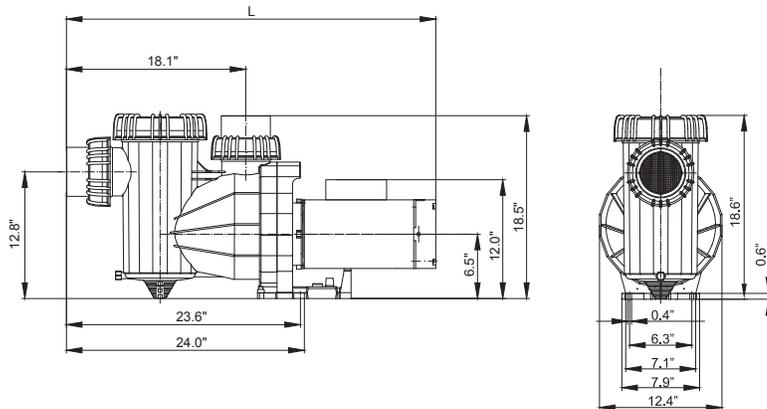

Performance Curves

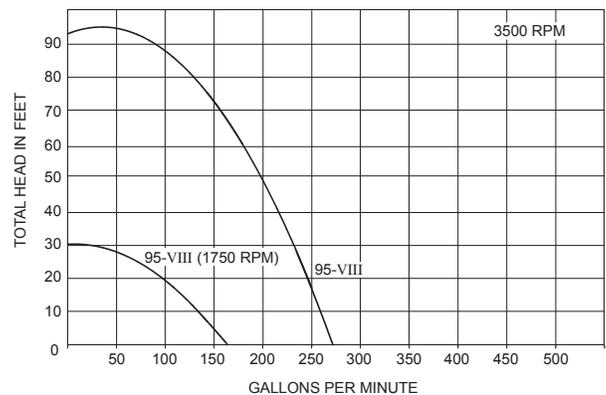

Technical Data

ORDER #	MODEL	MAX RATE		S.F. AMPS	VOLTS	MOTOR/FRAME	SPEED	DIMENSION "L"	SHIPPING WEIGHT
		HP	THP						
IG274-1500M-000	95-VIII (1PH)	5.0	5.0	21.0-19.4	208-230	ODP 56	single	36.8"	75 lbs.
IG271-2500M-000	95-VIII (1PH)	5.0	5.0	19.4/4.0	230	ODP 56	2-speed	36.8"	75 lbs.
IG273-1500M-000	95-VIII (3PH)	5.0	5.0	13.7-13.0/6.5	208-230/460	ODP 56	single	36.8"	80 lbs.