


XL Capacity Lane Line Reel



| | |
|-------------------------|--|
| Specification Number: | SR1003 |
| Product Description: | Lane Line Reel |
| S.R. Smith Part Number: | 36000 |
| Revision: | B |
| Written By: | Mikha Kaiel |
| Approved By: | Bill Svendsen |
| Page 1 of 2 | Proprietary and confidential: The information contained in this specification is the sole property of S.R. Smith LLC. Any reproduction in part or whole without the written consent of S.R. Smith LLC is prohibited. |

S.R. Smith, LLC
 P.O. Box 400, 1017 SW Berg Parkway
 Canby, Oregon 97013
 Tel: (888) 677-7776 (503) 266-2231
 Fax: (503) 266-4334
www.srsmith.com

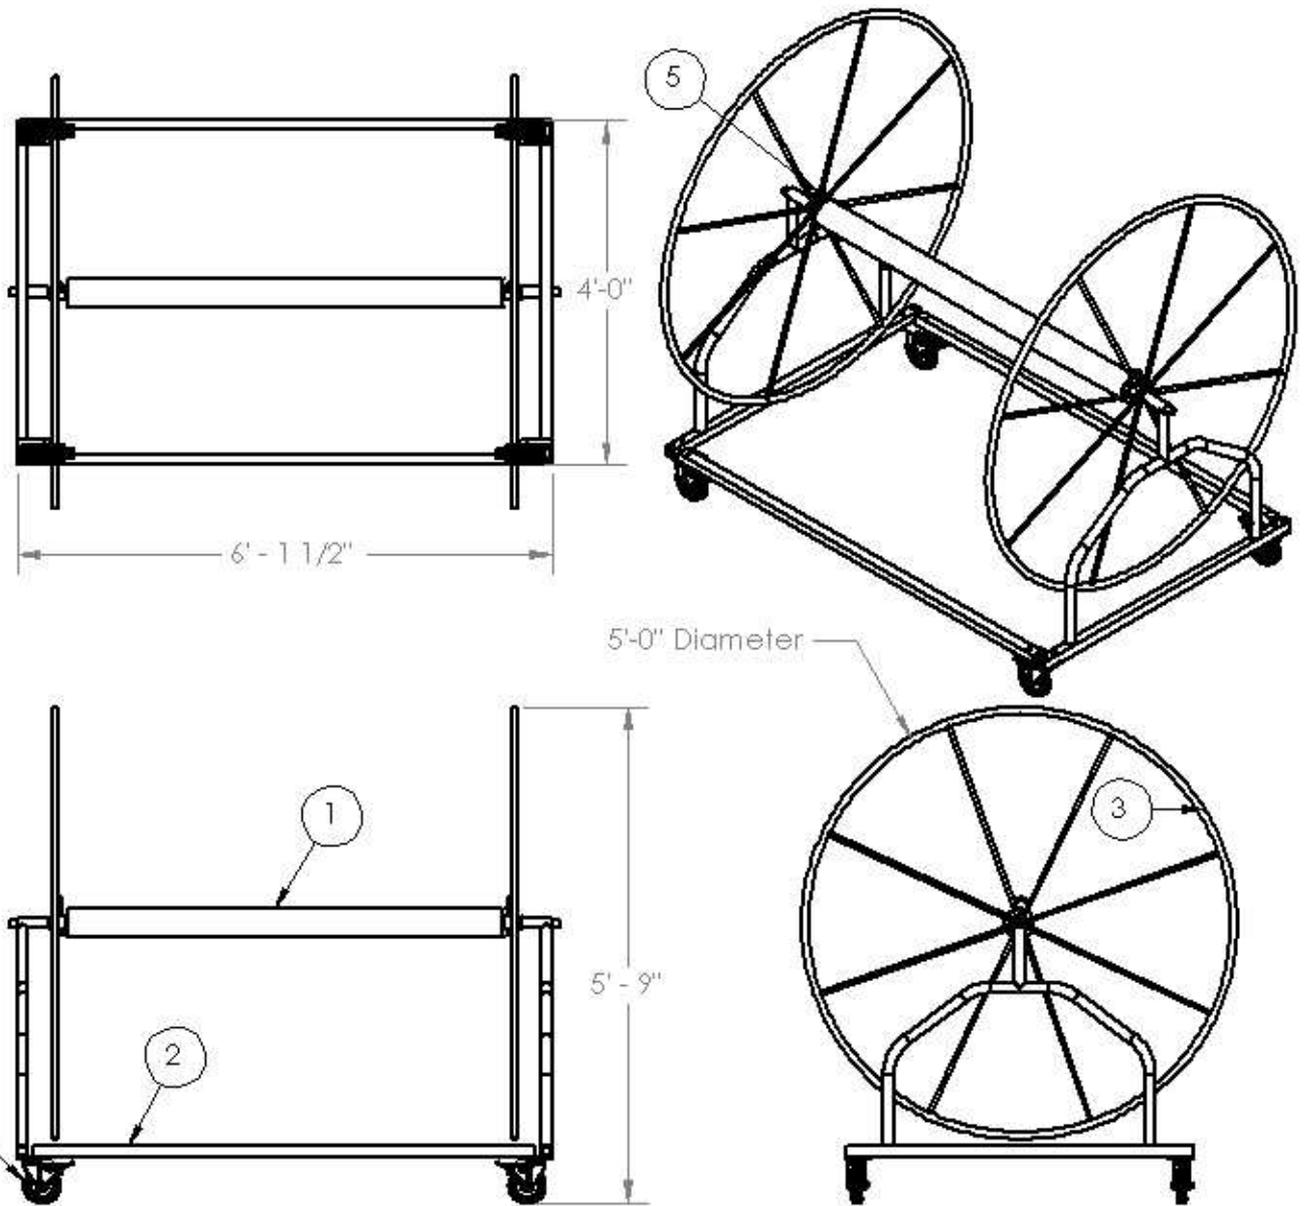

S.R. Smith LLC Commercial Division
Product Specifications - Written

Product Name: XL Capacity Lane Line Reel

Part Number: 36000

General Notes:

The XL Capacity Lane Line Reel is built from T304 stainless steel and all primary components are powder coated for added corrosion resistance. Unless specified otherwise, the standard product color is silver grey. The lane line reel is available in all of our other standard powder coating colors at no additional charge, and can be produced in custom colors for an additional charge. All hardware is 18-8 stainless steel.

Application:

The XL Capacity Lane Line Reel has the capacity to store 985' (300M) of 4" diameter lane lines or 575' (175M) of 6" diameter lane lines.

Specifications:

- 1 **Spool:** The main spool is constructed of 4" T304 stainless steel tubing with 1" T304 stainless steel shafts fully welded to each end. The main spool is then powder coated providing additional corrosion resistance. The shafts are housed in nylon bearings at each end to provide easy use.
- 2 **Frame:** The base frame is built from 1.5" T304 stainless steel square tubing and the side supports are built from 1.5" 304 stainless steel round tube. The frame is connected by bolting through the caster plates, which are welded to the side frame pieces for extra rigidity.
- 3 **Wheel:** Each wheel hub is constructed from 1" T304 stainless steel round tube with eight 1/2" T304 stainless steel spokes fully welded to a central hub minimize the lane line reels from pushing through. The 60" diameter allows for maximum storage.
- 4 **Large Diameter Locking Casters:** The 5" stainless steel and rubber casters allow for easy transport and long life. The casters are capable of swiveling a full 360 degrees and come equipped with locking wheels
- 5 **Eyehook:** Each wheel is attached to the spool with a specially designed eyehook to easily secure the first lane line.

Additional Product Numbers:

Lane Line Reel Cover 36100
 Shipping Weight: 20 lbs.

Shipping Weight and Dimensions:

Weight: 160 lbs.
 Dimensions: 80" x 62.5" x 11"

| | | |
|-------------------------|--|---------------|
| Specification Number: | SR1003 | |
| Product Description: | Lane Line Reel | |
| S.R. Smith Part Number: | 36000 | |
| Revision: | B | Date: 1/18/12 |
| Written By: | Mikha Kaiel | Date: 1/18/12 |
| Approved By: | Bill Svendsen | Date: 1/18/12 |
| Page 2 of 2 | Proprietary and confidential: The information contained in this specification is the sole property of S.R. Smith LLC. Any reproduction in part or whole without the written consent of S.R. Smith LLC is prohibited. | |

S.R. Smith, LLC
P.O. Box 400, 1017 SW Berg Parkway
Canby, Oregon 97013
Tel: (888) 677-7776 (503) 266-2231
Fax: (503) 266-4334
www.srsmith.com