

STA-RITE® OPTIFLO® PUMP

FOR ABOVEGROUND POOLS



Sta-Rite OptiFlo Pool Pump

Sta-Rite OptiFlo Pump high-flow performance supports a quieter operation. Constructed of Sta-Rite's rugged thermoplastic resin. Large 5-1/2 in. capacity trap and an all-weather, smooth-running motor.

Featured Highlights

- User-friendly removable drain plugs
- Cam and Ramp™ Lid lock
- Typical Installation – Ideal for aboveground pools
- Years of Service – Stands tough against temperature and weather extremes
- External Threads – Discharge port features external threads for quick-connect unions

CALIFORNIA PROPOSITION 65 WARNING

⚠ **WARNING:** Cancer and Reproductive Harm.
 ⚠ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.
 ⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo.
www.p65warnings.ca.gov PR201714

Ordering Information

Product	Discharge	Voltage	Full load amps	HP	Cord	Pipe	Weight
DOE COMPLIANT SINGLE-SPEED TEFC - CORD W/ STANDARD PLUG							
348196SR	Vertical	115	11.0	1	3' STD	1.5"	28.5
348200SR	Horizontal	115	11.0	1	3' STD	1.5"	28.5
DOE COMPLIANT SINGLE-SPEED TEFC - CORD W/ TWIST LOCK PLUG							
348195SR	Vertical	115	11.0	1	3' TWL	1.5"	28.5
348199SR	Horizontal	115	11.0	1	3' TWL	1.5"	28.5
DOE COMPLIANT SINGLE-SPEED TEFC - NO CORD							
348198SR	Vertical	115	11.0	1	None	1.5"	28.5
348202SR	Horizontal	115	11.0	1	None	1.5"	28.5
CSA SINGLE-SPEED TEFC - CORD W/ STANDARD PLUG - NOT FOR SALE IN THE USA							
348197SR	Vertical	115	11.0	1	25' STD	1.5"	28.5
348201SR	Horizontal	115	11.0	1	25' STD	1.5"	28.5
SINGLE-SPEED 230V - NO CORD - NOT FOR SALE IN THE USA							
340056SR	Vertical	230	5.0	3/4	None	1.5"	23.5
340057SR	Vertical	230	6.2	1	None	1.5"	23.0
340058SR	Vertical	230	7.8	1.5	None	1.5"	28.9



STA-RITE® OPTIFLO® PUMP

FOR ABOVEGROUND POOLS (CONT'D)

Dimensions and Performance



OptiFlo Pool Pump Performance Curves

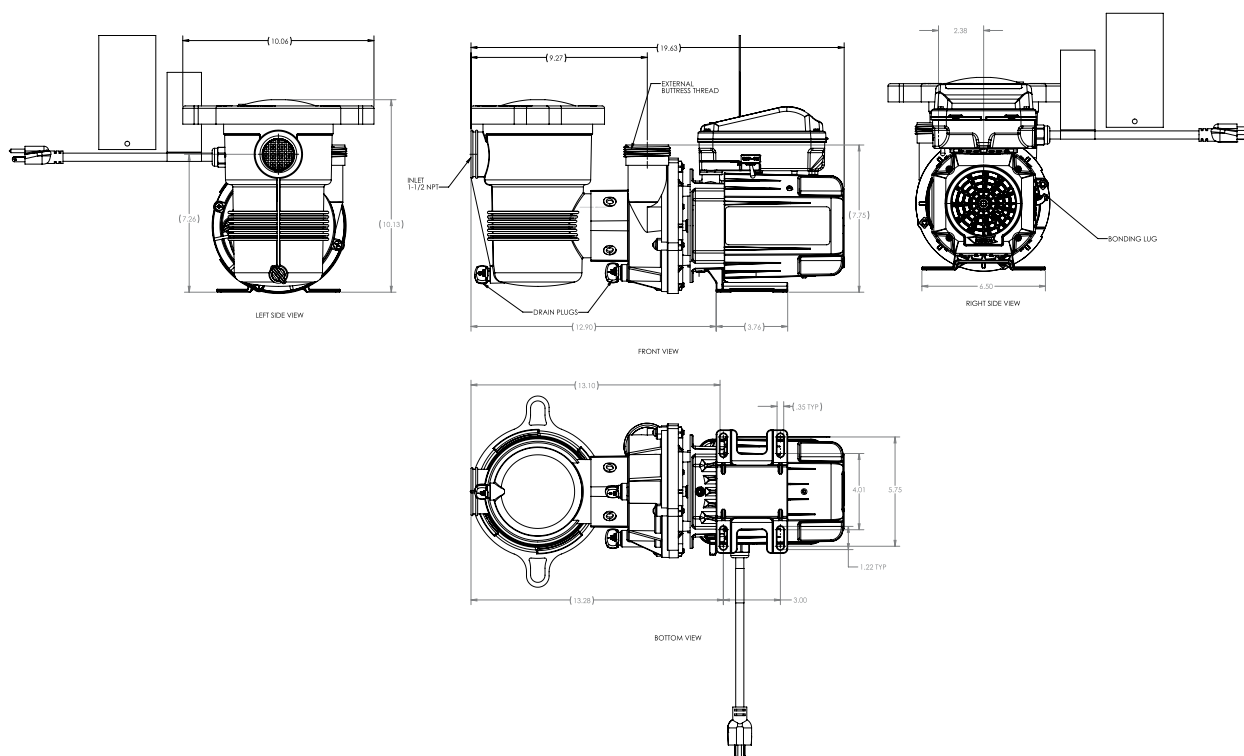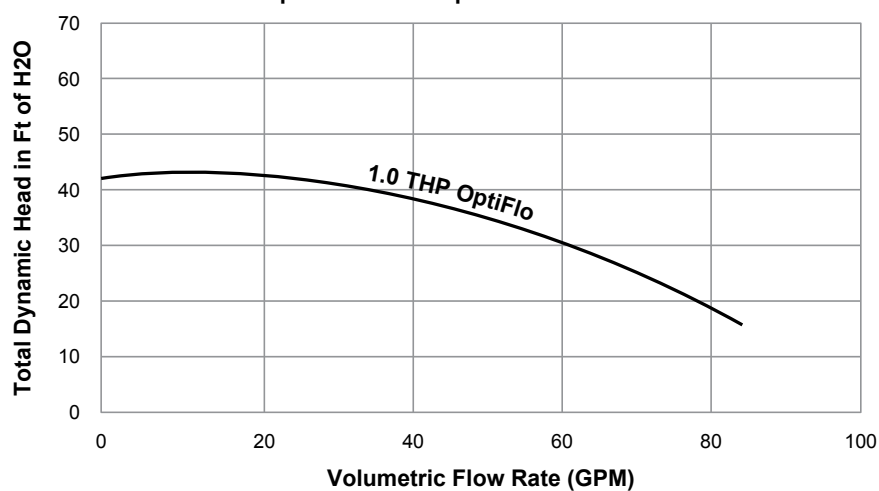

See page 541 for replacement parts.