



ECOLAWN APPLICATOR

**#1 SELF-PROPELLED
BROADCAST TOP DRESSER**



THE
LIGHTEST FOOTPRINT
IN THE INDUSTRY

ecolawnapplicator.com

TOW-BEHIND

ECO 50 ECO 50-S

ECO 50



- 11.5 ft³ a load / 326 L
- 3 to 12 ft. / 0.91 m to 3.66 m
- Single Spinner
- Crescent top conveyor belt

ECO50 - Simple Tow it. Minimal Upkeep.

A tow-behind spreader with a wheel-driven system, low-maintenance design to topdress with ease. Hitch it to any tractor, ATV, or utility vehicle.

Gate	On/off gate system
Included	Four tie-down points
Application Speed	9 cu. ft. /min – 20 cu. yd./h (15.29 m ³ /h)
Application Width	3 to 12 ft. (0.91 to 3.66 m)
Application Thickness	Up to 1/4 in. (6.35 mm)
Materials	Light soil mix, Screened compost, Crumb Rubber
Hopper Capacity	11.5 cu. ft. / 326 L
Broadcasting Drive & Mechanism	Belt-driven system with single disk / spinner
Ground speed	Up to 5 mph (8km/h)
Weight Distribution Design	Two-wheel design
Empty Weight	242 lbs (110 kg)
Dimension (L/W/H)	78 x 34 x 40 in. (1981 x 864 x 1016 mm)
Warranty	One (1) year commercial use on parts and labor
Certification	CE Certified

ECO 50S



- 11.5 ft³ a load / 326 L
- 4 to 18 ft. / 1.22 to 5.49 m
- Dual Spinners
- Rough top conveyor belt

ECO50-S - Wide Reach. Accurate Results.

All the simplicity of the ECO50 with dual spinners for a wider spread, an adjustable gate for a more precise control, and a retractable leg for easy storage.

Gate	Adjustable
Included	<ul style="list-style-type: none"> Gate stopper Retractable leg for storage Additional weight deflector Four tie-down points
Application Speed	9 cu. ft. /min – 20 cu. yd./h (15.29 m ³ /h)
Application Width	4 to 18 ft. (1.22 to 5.49 m)
Application Thickness	Up to 1/4 in. (6.35 mm)
Materials	Suitable for all grades of sand, calcined clay, crumb rubber, light soil mixes, lime, most pelletized products, pulverized soils, screened compost, screened loam, and unlimited custom blends.
Hopper Capacity	11.5 cu. ft. / 326 L
Broadcasting Drive & Mechanism	Gearbox-driven system with dual disks / spinners
Ground speed	Up to 5 mph (8km/h)
Weight Distribution Design	Two-wheel design
Empty Weight	270 lbs (122.47 kg)
Dimension (L/W/H)	78 x 34 x 40 in. (1981 x 864 x 1016 mm)
Warranty	One (1) year commercial use on parts and labor
Certification	CE Certified

PROPELLED


ECO 150



- 11.5 ft³ a load / 326 L
- 3 to 20 ft. / 0.91 to 6.10 m
- Single Spinner
- Crescent top conveyor belt

ECO 150 – Efficiency Made Easy.

A self-propelled topdresser powered by a Vanguard engine. Smooth, consistent spreading—perfect for those who want efficiency without complexity.

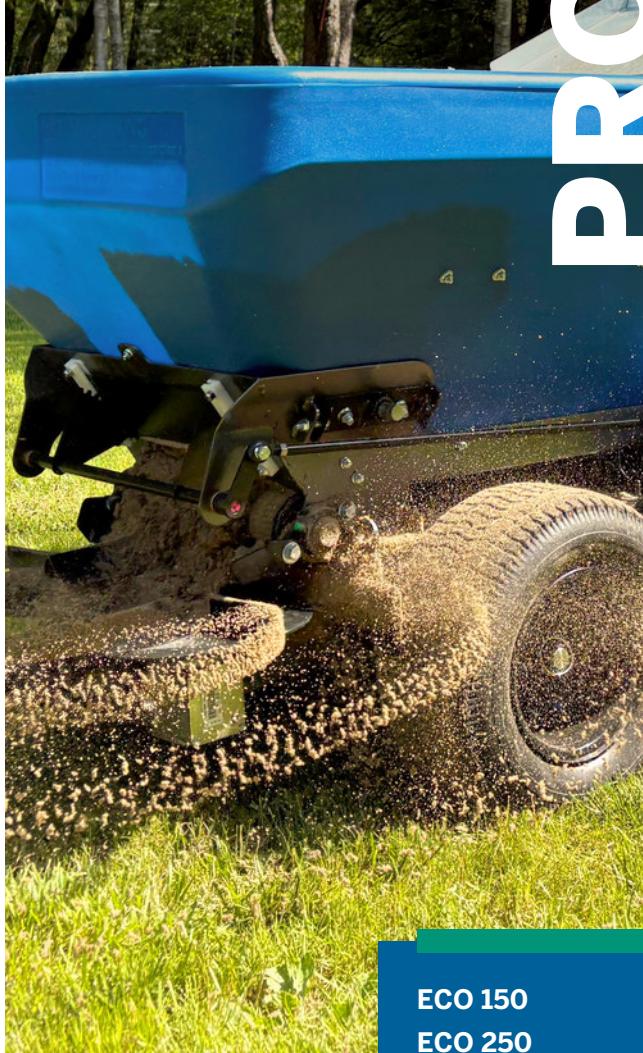

ECO 150 ECO 250 ECO 250-S ECO 250-G ECO 250-e

Gate	On/off gate system
Included	Four tie-down points
Application Speed	9 cu. ft. /min – 20 cu. yd./h (15.29 m ³ /h)
Application Width	3 to 20 ft. (0.91 to 6.10 m)
Application Thickness	Up to 1/4 in. (6.35 mm)
Materials	Light soil mix, Screened compost, Crumb Rubber
Hopper Capacity	11.5 cu. ft. / 326 L
Broadcasting Drive & Mechanism	Belt-driven system with single disk / spinner
Engine	Vanguard 5 HP
Engine Warranty	Briggs & Stratton's engine international warranty
Ground Speed	Up to 5 mph (8km/h)
Weight Distribution Design	Three-wheel design
Empty Weight	310 lbs (140.61 kg)
Dimension (L/W/H)	78 x 34 x 40 in. (1981 x 864 x 1016 mm)
Warranty	One (1) year commercial use on parts and labor
Certification	CE Certified



- 11.5 ft³ a load / 326 L
- 4 to 18 ft. / 1.22 to 5.49 m
- Dual Spinners
- Crescent top conveyor belt

ECO 250 — Precision Meets Performance.

A self-propelled topdresser with flow control and adjustable spreading widths. Professional results with low maintenance and ease of use.

Gate	Adjustable
Included	Four tie-down points
Application Speed	9 cu. ft. /min – 20 cu. yd./h (15.29 m ³ /h)
Application Width	4 to 18 ft. (1.22 to 5.49 m)
Application Thickness	Up to 1/4 in. (6.35 mm)
Materials	Suitable for all grades of sand, calcined clay, crumb rubber, light soil mixes, lime, most pelletized products, pulverized soils, screened compost, screened loam, and unlimited custom blends.
Hopper Capacity	11.5 cu. ft. / 326 L
Engine	5.5 HP Honda GX 160
Engine Warranty	Honda engine international warranty
Broadcasting Drive & Mechanism	Gearbox-driven system with dual disks / spinners
Ground Speed	Up to 5 mph (8km/h)
Weight Distribution Design	Four-wheel design
Empty Weight	336 lbs (152.41 kg)
Dimension (L/W/H)	78 x 34 x 40 in. (1981 x 864 x 1016 mm)
Warranty	One (1) year commercial use on parts and labor
Certification	CE Certified



- 11.5 ft³ a load / 326 L
- 4 to 18 ft. / 1.22 to 5.49 m
- Dual Spinners
- Rough top conveyor belt

ECO 250-S — Precision for Finer Materials.

Designed for handling finer materials with enhanced precision while keeping Ecolawn's easy-to-use and low-maintenance design.

Gate	Adjustable
Included	• Additional weight deflector • Four tie-down points
Application Speed	9 cu. ft. /min – 20 cu. yd./h (15.29 m ³ /h)
Application Width	4 to 18 ft. (1.22 to 5.49 m)
Application Thickness	Up to 1/4 in. (6.35 mm)
Materials	Suitable for all grades of sand, calcined clay, crumb rubber, light soil mixes, lime, most pelletized products, pulverized soils, screened compost, screened loam, and unlimited custom blends.
Hopper Capacity	11.5 cu. ft. / 326 L
Engine	5.5 HP Honda GX 160
Engine Warranty	Honda engine international warranty
Broadcasting Drive & Mechanism	Gearbox-driven system with dual disks / spinners
Ground Speed	Up to 5 mph (8km/h)
Weight Distribution Design	Four-wheel design
Empty Weight	336 lbs (152.41 kg)
Dimension (L/W/H)	78 x 34 x 40 in. (1981 x 864 x 1016 mm)
Warranty	One (1) year commercial use on parts and labor
Certification	CE Certified



- 11.5 ft³ a load / 326 L
- 4 to 18 ft. / 1.22 to 5.49 m
- Dual Spinners
- Crescent top conveyor belt

ECO 250-G — Built Tough for Every Season.

A year-round topdresser with galvanized components to handle corrosive materials. Durable, simple, and precise—in winter and beyond.

Gate	Adjustable
Included	Four tie-down points
Application Speed	9 cu. ft. /min – 20 cu. yd./h (15.29 m ³ /h)
Application Width	4 to 18 ft. (1.22 to 5.49 m)
Application Thickness	Up to 1/4 in. (6.35 mm)
Materials	Suitable for all grades of sand, calcined clay, crumb rubber, light soil mixes, lime, most pelletized products, pulverized soils, screened compost, screened loam, and unlimited custom blends.
Hopper Capacity	11.5 cu. ft. / 326 L
Engine	5.5 HP Honda GX 160
Engine Warranty	Honda engine international warranty
Broadcasting Drive & Mechanism	Gearbox-driven system with dual disks / spinners
Ground Speed	Up to 5 mph (8km/h)
Weight Distribution Design	Four-wheel design
Empty Weight	336 lbs (152.41 kg)
Dimension (L/W/H)	78 x 34 x 40 in. (1981 x 864 x 1016 mm)
Warranty	One (1) year commercial use on parts and labor
Certification	CE Certified



- 11.5 ft³ a load / 326 L
- 4 to 18 ft. / 1.22 to 5.49 m
- Dual Spinners
- Crescent top conveyor belt

ECO 250-e — Silent Efficiency.

All the performance of the ECO 250, now battery-powered and whisper quiet. Start earlier, finish later, and work without disturbing others.

Gate	Adjustable
Included	Four tie-down points
Application Speed	9 cu. ft. /min – 20 cu. yd./h (15.29 m ³ /h)
Application Width	4 to 18 ft. (1.22 to 5.49 m)
Application Thickness	Up to 1/4 in. (6.35 mm)
Materials	Suitable for all grades of sand, calcined clay, crumb rubber, light soil mixes, lime, most pelletized products, pulverized soils, screened compost, screened loam, & unlimited custom blends.
Hopper Capacity	11.5 cu. ft. / 326 L
Engine	48 V 1.5 kWh Vangaurd Commercial Battery
Battery Warranty	Briggs & Stratton's engine international warranty
Battery Dimension & Weight	10.2 x 5.4 x 16.7 in (259 x 137 x 423 mm) 26 lbs. (11.79 kg)
Charging time	75 minutes
Broadcasting Drive & Mechanism	Gearbox-driven system with dual disks / spinners
Weight Distribution Design	Four-wheel design
Ground speed	Up to 5 mph (8km/h)
Dimension (L/W/H)	78 x 34 x 40 in. (1981 x 864 x 1016 mm)
Empty Weight	441 lbs (200 kg)
Warranty	One (1) year commercial use on parts and labor
Certification	CE Certified

ECO SEEDER

The ECO Seeder turns a multi-step task into a single operation by spreading seeds and compost at the same time.

FEATURES

Self-propelled broadcast top dresser

- The stainless-steel container holds 5 to 6 pounds (2.3–2.7 kg) of seed. It can also be used for synthetic fertilizer, bio-char blends, and other products.
- Its adjustable and precise opening mechanism allows the operator to adjust the flow as desired.
- The Eco-Seeder fits all Ecolawn Applicator models.



HOPPER FUNNEL



The Hopper Funnel by Ecolawn Applicator —the perfect solution for easy, efficient loading.

FEATURES

The Hopper Funnel fits all models

- Designed to accommodate loading by buckets, this funnel extends the opening up to 54 inches (137 cm), making the process faster and hassle-free.
- Not only does it simplify loading, but it also serves as a protective shield for your engine, preventing material from accidentally dropping on it during the process.
- Enhance your efficiency and protect your equipment with the Hopper Funnel by Ecolawn Applicator.

GATE STOPPER


Pre-adjustable door opening ensures consistent setting for each use, adapted to the specific material being spread.

- The gate stopper fits on ECO 250, ECO 250-S, ECO 250-G, ECO 250-e



TRUSTED WORLDWIDE. PROVEN EXPERTISE. The Ecolawn Advantage

- Trusted in 30+ countries
- Backed by 30+ years of expertise
- Delivering innovative, simplified, high-quality products
- Making lawn care efficient, sustainable & accessible
- For professionals and homeowners alike

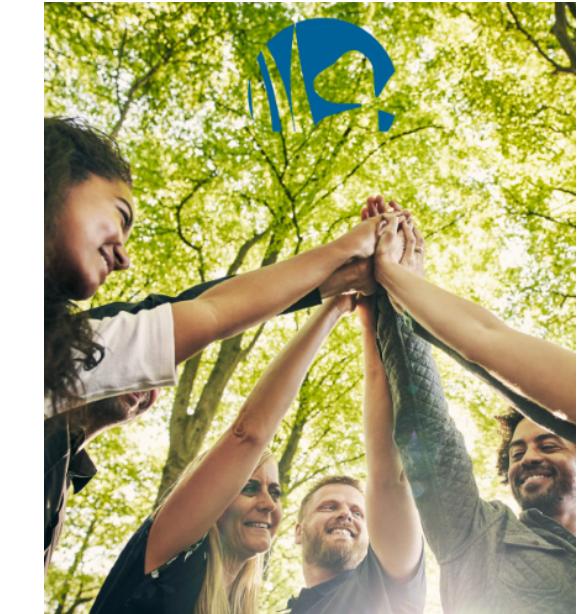

FAQ

WHAT IS TOP DRESSING?

Top dressing is an application of compost or a blend of soil/compost/sand onto existing turf. For best results, a top dressing blend should have a higher content of compost than any other material.

WHAT MATERIAL SHOULD I USE FOR TOP DRESSING?

Compost significantly increases soil's water retention, improves the overall soil structure, stimulates microbial activity, breaks down thatch, and neutralizes the soil's pH. A natural, slow-releasing soil amendment, containing everything turf needs to thrive.

Quality screened compost is best! The compost must have a fine crumbly structure and a homogeneous texture. It must be well-screened and have a high content of stable, organic matter. Finally, but not least of all, it must be weed-free. For efficient and easy application, the compost moisture should be maintained at around 50%.

WHY IS TOP DRESSING WITH COMPOST SO EFFECTIVE?

Compost significantly increases soil's water retention, improves the overall soil structure, stimulates microbial activity, breaks down thatch and neutralizes the soil's pH. It is simply the best, natural, slow-releasing soil amendment, containing everything turf needs to thrive.

WHAT ARE THE STEPS INVOLVED IN COMPOST TOP DRESSING?

1. Mow the lawn to 1.75 in. (4.5 cm)
2. If needed, aerate and overseed
3. Fill the Ecolawn hopper with compost or a compost/soil blend
4. Spread evenly, working from the farthest point back
5. Repeat until the entire lawn is covered
6. Water for two days to fully activate the compost

WHEN SHOULD I TOP DRESS AND HOW FREQUENTLY?

You can top dress at any time during the year. Usually, top dressing is recommended during growing season, but not during extreme heat waves. As a general rule, we recommend top dressing with compost at least once a year. However, there are two factors that determine the frequency of top dressing:

- The amount of usage that a lawn gets;
- The health of the soil which it is growing.

Heavily used lawns and unhealthy soils may benefit from more frequent applications.


SUBSCRIBE TO OUR CHANNELS



@ecolawnapplicator



ecolawn-applicator



@EcolawnApplicator



ecolawn.applicator



@ecolawnapplicator

- Expert advice and Pro tips and tricks
- Tutorials and practical demonstrations
- New content announcements

NEWSLETTER ► COMING SOON

Our monthly newsletter with product updates, helpful tips, and exclusive info—sign up to stay in the loop!



► Scan to subscribe to our newsletters



ecolawnapplicator.com

1 866 326-5296

410 Boulevard Poirier, Magog (Quebec) CANADA J1X 0A1

