




BLU 60 mm (6" × 13")

DESCRIPTION: Slab **TEXTURE:** Smooth and HD² Smooth

Pallet Overview




Specifications per pallet




198 units / pallet

	Imperial	Metric
Product dimension (L × W × H)	6 ½ × 13 × 2 ¾	165 × 330 × 60
Cubing	116.05 ft²	10.78 m²
Approx. Weight Smooth	3 138 lbs	1 423 kg
Approx. Weight HD² Smooth	3 147 lbs	1 427 kg
Number of rows	11	
Coverage per row	10.55 ft²	0.98 m²
Lin. coverage per row	Depth 19.5 lin. ft	5.94 lin. m
	Length 9.75 lin. ft	2.97 lin. m

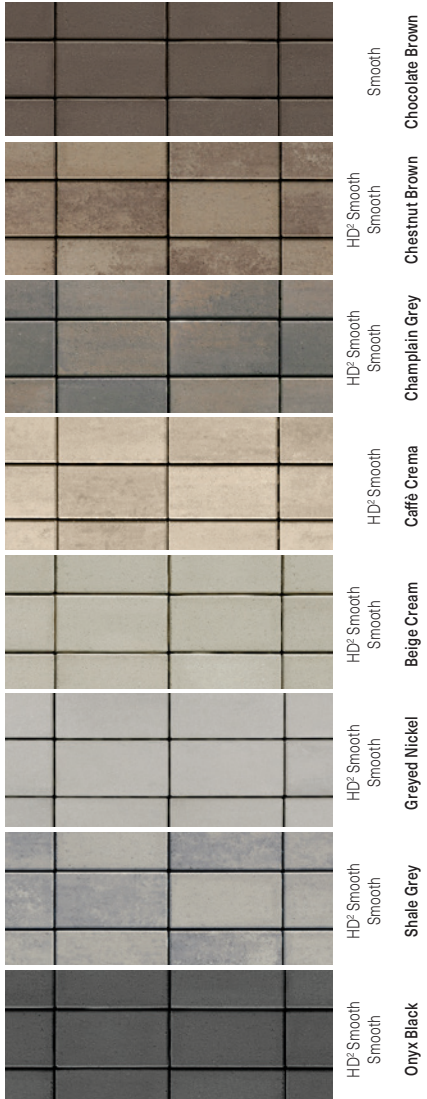

Laying Patterns Options

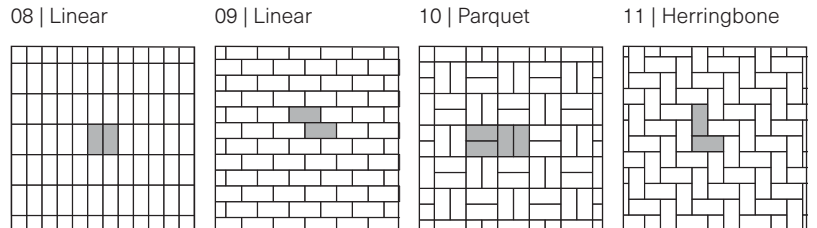

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

NOTES

See page 6 for icons description.
 See page 16 for more information about applications.
 See page 26 to 28 for more technical information. When used in a permeable pavement application, see page 93 to 102 for more technical information.


JOINT WIDTH: ½" (7 mm)
% OF SURFACE OPENING: 4.8%
INFILTRATION RATE: 570 in./hr (14 475 mm/hr)
 *For this application, it is recommended that this product be installed on a concrete base as designed by a local Engineer.




BLU GRANDE

DESCRIPTION: Slab **TEXTURE:** Smooth and HD² Smooth


Pallet Overview




SMOOTH

Specifications per pallet		Imperial	Metric
	Product dimension (L x W x H)	32 ½ x 19 ½ x 2 ¾	825 x 495 x 60
	Cubing	87.91 ft²	8.17 m²
20 units / pallet	Approx. Weight	2 382 lbs	1 081 kg
	Number of rows	10	
	Coverage per row	8.79 ft²	0.82 m²
Lin. coverage per row	Depth	3.25 lin. ft	0.99 lin. m
	Length	5.41 lin. ft	1.65 lin. m

HD² SMOOTH

Specifications per pallet		Imperial	Metric
	Product dimension (L x W x H)	32 ½ x 19 ½ x 2 ¾	825 x 495 x 60
	Cubing	96.71 ft²	8.98 m²
22 units / pallet	Approx. Weight	2 744 lbs	1 244 kg
	Number of rows	11	
	Coverage per row	8.79 ft²	0.82 m²
Lin. coverage per row	Depth	3.25 lin. ft	0.99 lin. m
	Length	5.41 lin. ft	1.65 lin. m

Laying Patterns Options

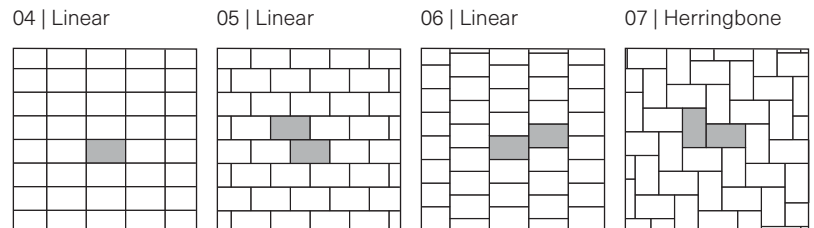

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

NOTES

See page 6 for icons description.

See page 16 for more information about applications.

See page 26 to 28 for more technical information.

Allowable load Capacity of slab on pedestal set (including a safety factor of 2): 776 lb (352 kg)




The application on pedestal Set for Blu Grande is recommended for Blu Grande in HD² only.






BLU 60 mm


DESCRIPTION: Slab TEXTURE: Smooth and HD² Smooth



Specifications per pallet ¹		Imperial	Metric
A 	Product dimension (L x W x H) A	6 1/2 x 13 x 2 3/8	165 x 330 x 60
	Product dimension (L x W x H) B	13 x 13 x 2 3/8	330 x 330 x 60
	Product dimension (L x W x H) C	19 1/2 x 13 x 2 3/8	495 x 330 x 60
44 units / pallet	Cubing	116.82 ft ²	10.96 m ²
B 	Approx. Weight Smooth	3 170 lbs	1 438 kg
	Approx. Weight HD ² Smooth	3 295 lbs	1 495 kg
C 	Number of rows	11	
	Coverage per row	10.62 ft ²	0.99 m ²
	Lin. coverage per row	9.81 lin. ft	3.02 lin. m

Specifications per pallet ²		Imperial	Metric
A 	Product dimension (L x W x H) A	6 1/2 x 13 x 2 3/8	165 x 330 x 60
	Product dimension (L x W x H) B	13 x 13 x 2 3/8	330 x 330 x 60
	Product dimension (L x W x H) C	19 1/2 x 13 x 2 3/8	495 x 330 x 60
44 units / pallet	Cubing	135.39 ft ²	12.58 m ²
B 	Approx. Weight HD ² Smooth	3 779 lbs	1 714 kg
	Number of rows	11	
C 	Coverage per row	12.31 ft ²	1.14 m ²
	Lin. coverage per row	11.37 lin. ft	3.47 lin. m
		² New packaging HD ² Smooth - Available after depletion of original packaging	

MECHANICAL INSTALLATION²

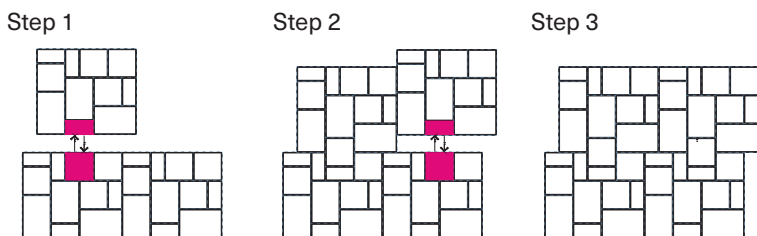

Clamp or Mechanical tool available for machine installation. Check with your local Techo-Bloc representative for more information.

NOTES

See page 6 for icons description.

See page 16 for more information about applications.

See page 26 to 28 for more technical information. When used in a permeable pavement application, see page 93 to 102 for more technical information.

*For this application, it is recommended that this product be installed on a concrete base as designed by a local Engineer.

JOINT WIDTH: 3/32" (7 mm)
% OF SURFACE OPENING: 4.5%**
INFILTRATION RATE: 570 in./hr (14 475 mm/hr)

**For permeable application, the installation should be combined with Blu 6 x 13 in a modular pattern. A min. of 4.5% opening surface requires 75% of Blu 6 x 13 and 25% of Blu.

Pallet Overview

