



The New Industry Standard
for purely professional sprays and nozzles



MAXSpray



Weathermatic®
Water Conserving Innovation

MAX Features



Max Grip Cap & Body

Easy grip body & cap with 8 internal ribs for ultra strength under pressure



Max Leak Free Seal

Dual pressure-activated seal with 720 degree sealing surface around riser, cap, and body to eliminate leaks and stick-ups



Max Strength Check Valve

Self-cleaning check valve and large sealing surface

Max Control Ratchet


Fine tune nozzle alignment effortlessly even with wet hands - no tools required



MAX Performance

Every Max Spray model includes a super-strength spring with over 37% stronger retraction force than the leading competitor. Result: Max Spray better prevents stick-ups in the field.

MAXSpray

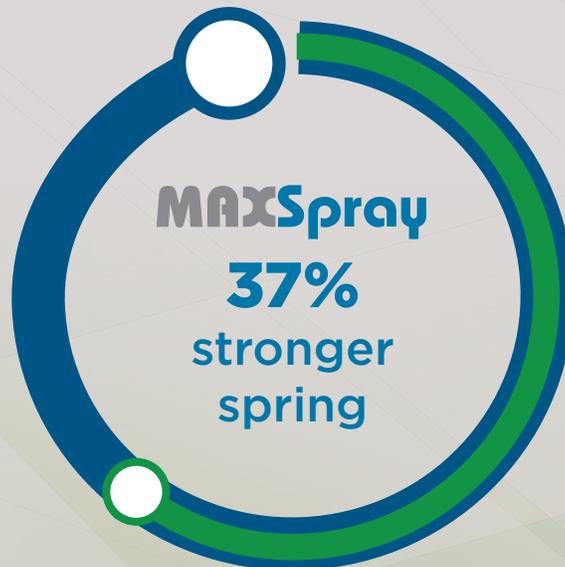

Competitor



Commercial strength spring included on all standard models for less stick-ups in the field

MAX Nozzles

- Excellent edge-to-edge watering and performance
- Consistent patterns across each nozzle in the bag
- Color-coded identification in a self-sealing bag

MAXMPR



MAXAAN



B Series



Build your systems with purely professional quality using the full range of Max sprays and nozzles

MAX Models

MAX SEAL

- Industry first dual pressure-activated seal with 720 degree sealing surface around flow tube stem, cap, and body eliminates stick-ups and cap to body leaks
- Industry standard white Santoprene seal for ultimate performance

MAX SPRING

- Industry's strongest spring for positive retraction
- Corrosion resistant stainless steel material for long life
- Unique reversible spring design can be installed in either direction for simple, fast field assembly

MAX SELF-CLEANING CHECK VALVE

- Enhanced debris resistance through expanded surface area
- Tapered design for self-cleaning operation
- Positive seal even in dirty water environment

MAX PRESSURE REGULATION

- Reduces water consumption by up to 50%
- Eliminates wasted water caused by high pressure - no misting and fogging
- Optimizes outlet pressure for consistent performance, even with pressure variations

MAX LEVEL CAP

- Flat cap and easy pull up, low profile flush plug for sprinkler leveling
- Superior labeling process allows better identification and customization

MAX NOZZLE OPTIONS

- Compatible with all industry-standard female thread nozzles



STANDARD & CHECK VALVE MODELS

Model	Description
MAX4	4" Pop-Up Height
MAX6	6" Pop-Up Height
MAX12	12" Pop-Up Height
MAX4-CV	4" Pop-Up Height with Check Valve
MAX6-CV	6" Pop-Up Height with Check Valve
MAX12-CV	12" Pop-Up Height with Check Valve

PRESSURE REGULATING MODELS TO 30 LBS - BEST FOR STANDARD SPRAY NOZZLES

Model	Description
MAX4PRS30	4" Pop-Up Height with 30 PSI regulated stem
MAX6PRS30	6" Pop-Up Height with 30 PSI regulated stem
MAX12PRS30	12" Pop-Up Height with 30 PSI regulated stem
MAX4PRS30-CV	4" Pop-Up Height with 30 PSI regulated stem and Check Valve
MAX6PRS30-CV	6" Pop-Up Height with 30 PSI regulated stem and Check Valve
MAX12PRS30-CV	12" Pop-Up Height with 30 PSI regulated stem and Check Valve



PRESSURE REGULATING MODELS TO 40 LBS - BEST FOR ROTATING NOZZLES

Model	Description
MAX4PRS40	4" Pop-Up Height with 40 PSI regulated stem
MAX6PRS40	6" Pop-Up Height with 40 PSI regulated stem
MAX12PRS40	12" Pop-Up Height with 40 PSI regulated stem
MAX4PRS40-CV	4" Pop-Up Height with 40 PSI regulated stem and Check Valve
MAX6PRS40-CV	6" Pop-Up Height with 40 PSI regulated stem and Check Valve
MAX12PRS40-CV	12" Pop-Up Height with 40 PSI regulated stem and Check Valve



💧 Water Saver 💧 MAX Water Saver

Pressure range:

15 - 70 PSI (1,0 - 4,8 BARS)

Blow-by:

Zero @ 5 PSI (0,3) or greater

Factory installed check valve:

14 ft/hd @ 18 PSI (4.3 m/hd @ 1,2 BAR)

Which is better?

MAX Competition



	Weathermatic® MAX SPRAY	Competitor
Virtually zero flow by at 5 psi for quick sealing ensures all heads pop-up quickly	YES	NO
Easy grip ribbed cover and body	YES	NO
Pressure activated cap to body seal	YES	NO
Standard models use double strength retraction spring with reversible design for easy assembly in the field	YES	NO
Fine tune ratchet adjustment with wet hands - no tools required	YES	NO
Self-cleaning check valve with large surface area (prevents weeping)	YES	NO
Eight (8) internal ribs for improved strength	YES	NO
Sold exclusively through authorized professional wholesale distributors	YES	NO
5-year warranty	YES	YES
Side and bottom inlets on the 6" and 12" models	YES	YES
Check valve and pressure regulated options available	YES	YES
Pop-up heights available	4, 6, 12	4, 6, 12
Operation range (psi)	15 to 70	15 to 70

Available exclusively through the industry's foremost network of authorized distributors, professional contractors, and certified consultants since 1945.

weathermatic.com
 Support: 888.484.3776
support@weathermatic.com



SAVE WATER
GIVE LIFE

For every Max Spray sold, we give 50 gallons of clean drinking water through the drilling of clean water wells

