



Jandy®

**MORE SIZES.
MORE SOLUTIONS.**



SFSM

SAND FILTER SIDE MOUNT

The Jandy® Side-Mount Sand Filters are designed for fit, function and flexibility

Get clear, clean water with our durable Side-Mount Sand Filters. Available in four sizes, these filters are designed for easy installation and replacement of existing residential filters.

- ### Beyond the Backyard

Designed for residential or commercial use

- ### Size Matters

Available in four sizes; 24 inches, 30 inches 35 1/2 inches and 37 inches, ensuring there's a filter that can fit through a 36-inch doorway

- ### Easy Installation

Industry-standard plumbing connections for simple filter swaps

- ### Minimal Maintenance

Combination water/sand drain for easy maintenance

- ### Cost Efficient Filtration


Clean/Dirty indicator on pressure gauge allows you to know exactly when to clean the filter for optimal filtration and water savings

FEATURES

- Laminated polyester / fiberglass resin tank construction
- 7 1/2" center-to-center spread on inlet / outlet ports
- Fitted with easy-to-read pressure gauge and manual bleed valve
- Connects with two 2" x 2 1/2" Jandy unions (not included)
- Three (3) Backwash Valves kit options: 2-in-1 Valve (BWVL-NVL-75), Slide Valve (BWVL-SLD-75), Multi-Port Valve (BWVL-MPV-75)
- 360° clamp-style valve rotates for easy installation
- Modular internal plumbing allows for easy servicing and replacement
- Hurricane-resistant robust base design prefabricated to fit fastening bolts

Jandy.com | 1.800.822.7933

©2021 Zodiac Pool Systems LLC. All rights reserved. ZODIAC® is a registered trademark of Zodiac International, S.A.S.U., used under license. All other trademarks are the property of their respective owners. 1461_SL

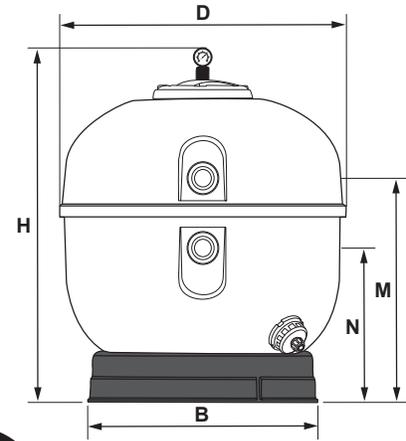

DIMENSIONS

	SFSM60	SFSM100	SFSM120	SFSM140
Dim "H"	34" (86.3 cm)	41" (104.1 cm)	47" (119.4 cm)	49.7" (126.2 cm)
Dim "D"	26.0" (66.0 cm)	32.5" (82.6 cm)	35.5" (90.2 cm)	37.5" (95.3 cm)
Dim "N"	13.625" (34.6 cm)	16.5" (41.9 cm)	18.75" (47.3 cm)	18.75" (47.26 cm)
Dim "M"	21.12" (53.6 cm)	24" (61 cm)	26.41" (67 cm)	26.41" (67 cm)
Dim "B"	19.29" (49 cm)	24.6" (62.5 cm)	27.75" (70.5 cm)	27.75" (70.5 cm)
Weight (empty)	70 lbs (31.8 kg)	75 lbs (34.0 kg)	143 lbs (65 kg)	147 lbs (67 kg)

SPECIFICATIONS

	ft ²		m ²		ft ²		m ²		ft ²		m ²	
	ft ²	m ²	ft ²	m ²	ft ²	m ²	ft ²	m ²	ft ²	m ²	ft ²	m ²
Filtration Area	3.15	0.29	5.00	0.46	5.90	0.55	7.06	0.65				
Max Flow Rate	gpm	lpm	gpm	lpm	gpm	lpm	gpm	lpm	gpm	lpm	gpm	lpm
	63	238	100	375	118	447	141	533				
Max Filtration Rate	20 gpm/ft ² (815 l/min/m ²)											
Backwash Flow Rate Min.	gpm	lpm	gpm	lpm	gpm	lpm	gpm	lpm	gpm	lpm	gpm	lpm
	47	177	75	284	88	335	105	397				
Max Working Pressure	psi	bar	psi	bar	psi	bar	psi	bar	psi	bar	psi	bar
	50	3.4	50	3.4	50	3.4	50	3.4				
Six Hour Capacity	gal	lit	gal	lit	gal	lit	gal	lit	gal	lit	gal	lit
	22,680	85,680	36,000	135,000	42,480	160,920	50,760	191,880				
Normal Startup Pressure	psi	bar	psi	bar	psi	bar	psi	bar	psi	bar	psi	bar
	5-15	0.3-1	5-15	0.3-1	5-15	0.3-1	5-15	0.3-1				

New Backwash Valves fit SFSM Series



BWVL-NVL-75
Jandy 2-in-1 Valve



BWVL-SLD-75
Jandy Slide Valve



BWVL-MPV-75
Jandy Multi-Port Valve