



DROP IN REPLACEMENT GUIDE

FILTERS



OFFICIAL
POOL
EQUIPMENT
SPONSOR



Why Jandy®?

Why settle for sufficient when you can get superior...

With Jandy equipment, you're getting a product that's easy to install in most pool pads, compatible with most existing setups and provides unparalleled performance and efficiency.



Protecting Your Bottom Line

We've got your back. Our equipment is **NOT** available for purchase on the internet. Only through you.



Drops In with Ease

Jandy equipment is engineered to easily replace any existing equipment in the pool pad with minimal or no plumbing adjustments. Jandy is a trade-up, not just a trade out.



Built to Last


Our equipment is designed for durability so you can get the job done and can trust that it will perform for the long haul.





Support You Can Count On

With our superior customer service and dedicated training team available to you when you need it most, you'll never be caught off-guard on-site.

Why Jandy is the Best Option to replace a Pentair® Clean & Clear® Plus Filter

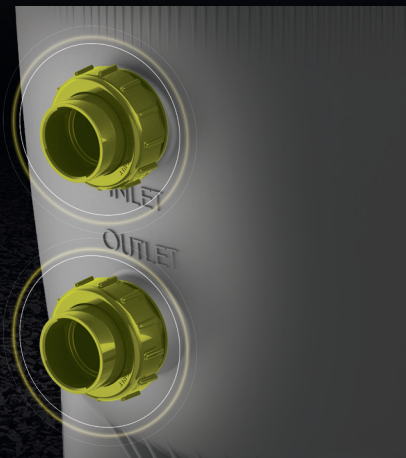


Matching Pentair® inlet and outlet positions



Compatible with Pentair® Union Fittings

Each Filter Includes Pentair® Unions

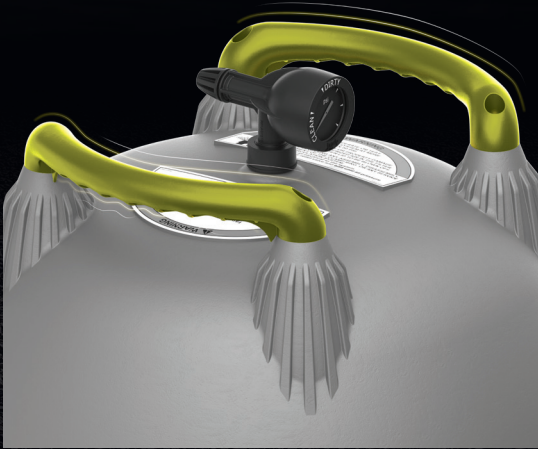

Handles for Easy Service



High-Tech corrosion-free and UV-resistant material


Jandy® Drop-In vs Pentair® Clean & Clear® Plus

Jandy cartridge filters are engineered to drop directly into existing Pentair® Clean & Clear® Plus installations, delivering a faster install and a better-performing upgrade.

Jandy Drop-In Replacements:

- CC300 replaces Pentair® CCP320
- CC400 replaces Pentair® CCP420
- CC500 replaces Pentair® CCP520

Jandy filters are engineered for seamless retrofit into existing equipment pads with minimal or no plumbing changes.

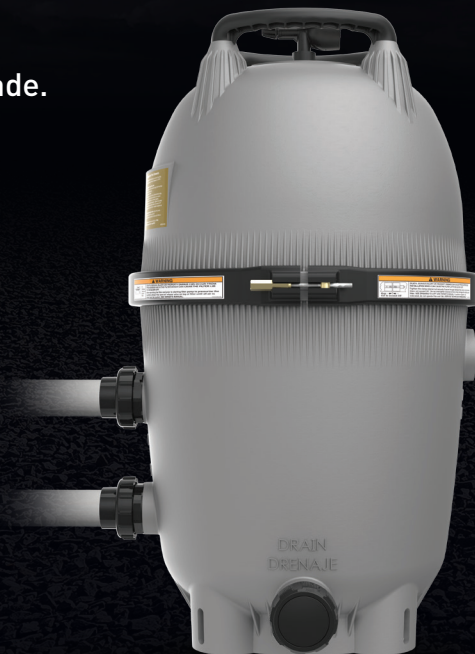

Jandy CC Series Cartridge Filters - Direct replacement for Pentair® Clean & Clear® Plus

Currently Installed (Pentair®)				Jandy Drop-In Replacement				
Pentair Model	Item	Filter Area (SQ. FT.)	Flow Rate Residential (GPM)	Jandy Model	Filter Area (SQ. FT.)	Max Residential Flow Rate (GPM)	Max Commercial Flow Rate (GPM)	Max Pressure
CCP320	160340	320	120 →	CC300	300	150	112	50 psi
CCP420	160301	420	150 →	CC400	400	150	150	50 psi
CCP520	160332	520	150 →	CC500	500	150	150	50 psi

Dimensions & Footprint


Currently Installed (Pentair®)				Jandy Drop-In Replacement			
Pentair Model	Item	Body Diameter	Tank Height	Jandy Model	Footprint (W x D)	Tank Height	Min. Side Clearance
CCP320	160340	21.5"	43" →	CC300	26.5" x 24"	40.5"	6"
CCP420	160301	21.5"	49" →	CC400	26.5" x 24"	40.5"	6"
CCP520	160332	21.5"	56" →	CC500	26.5" x 24"	46.5"	6"

Installation Steps and Dimensions

How to Drop In:

1. Shut off system and relieve pressure
2. Remove existing Pentair® Clean & Clear® Plus filter
3. Set Jandy® filter in place
4. Connect to existing plumbing
5. Start system and verify operation

Designed for qualified pool professionals.

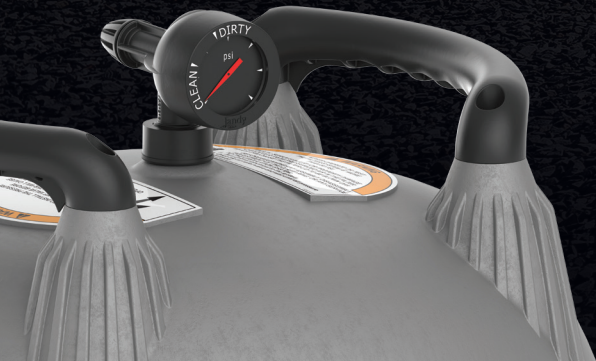

Height: 40.5"–46.5"


Width: 26.5"

Depth: 24"

Minimum clearance: 6"

NOTE: Jandy filter bodies are ~2" wider than Pentair® units. Verify available space before installation.



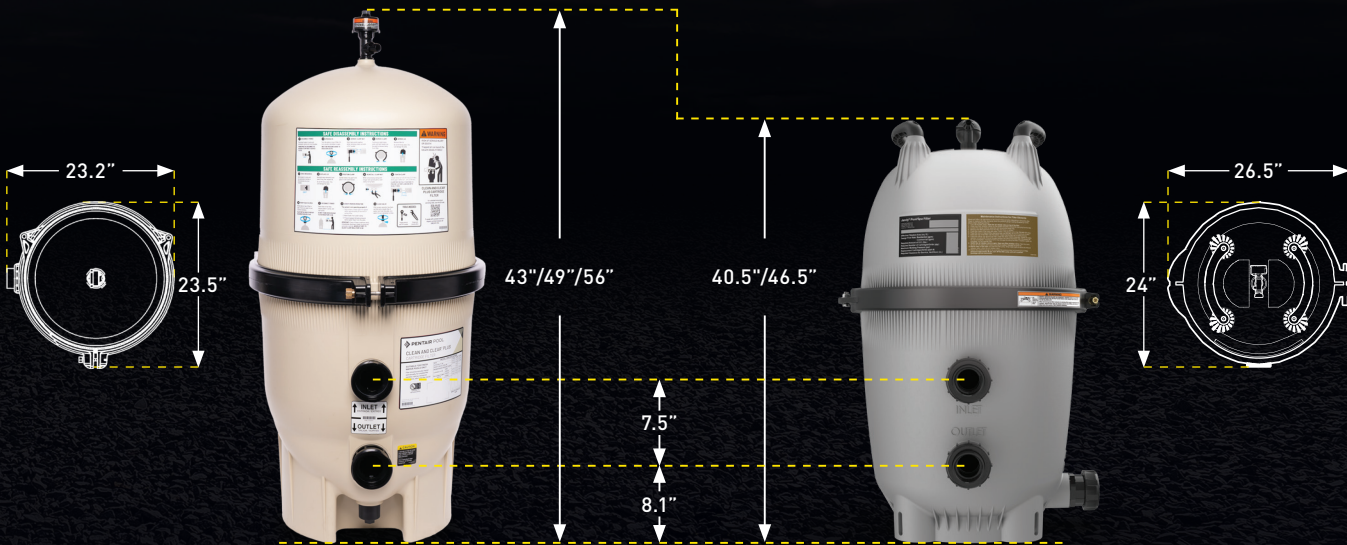

Pentair® Clean & Clear® Plus Cartridge Filters

Jandy CC Series Cartridge Filters



DON'T LEAVE

MONEY ON THE TABLE

SIGN UP TODAY &

GET THE **RIGHT TOOLS**

Fluidra's ServicePro Rewards Program is designed specifically for pool service companies and gives you access to the right tools, including marketing services, software, training and valuable consumer incentives — everything you need to grow your business.



SIGN UP NOW AND UNLOCK OVER **\$5,000 IN VALUE** INCLUDING:



\$50 Sign-Up Bonus



\$250 back on first
\$5,000 spent



\$100 Off first \$1,000 of
select parts purchases



\$200 Off first 5
VS Pump purchases



\$200 Off first 5
Automation purchases



Extended **Limited
Warranties** on Fluidra
products and parts

Sign up today!



*Program subject to change or cancellation without notice.

FluidraPro.com/Sign-Up



Jandy.com | 1.800.822.7933

©2026 Fluidra. All rights reserved. The trademarks and trade names used herein are the property of their respective owners. 40762

