

Engineered Lighting Solutions



Design gasket to center and level lamp.

Change shroud cut off to maximize output.

Separation point at groove for seamless design.

SEE DETAIL B



25' wire lead to support HUB Wiring System.




NOBLE Knights Series

A powerful yet compact uplight, the Noble was designed to perform with drop-in LEDs. The compact design removes wasted space required in the halogen fixtures of the past. Constructed from solid brass, this CNC machined fixture is the perfect accent to any landscape.

UNIQUE
LIGHTING SYSTEMS®

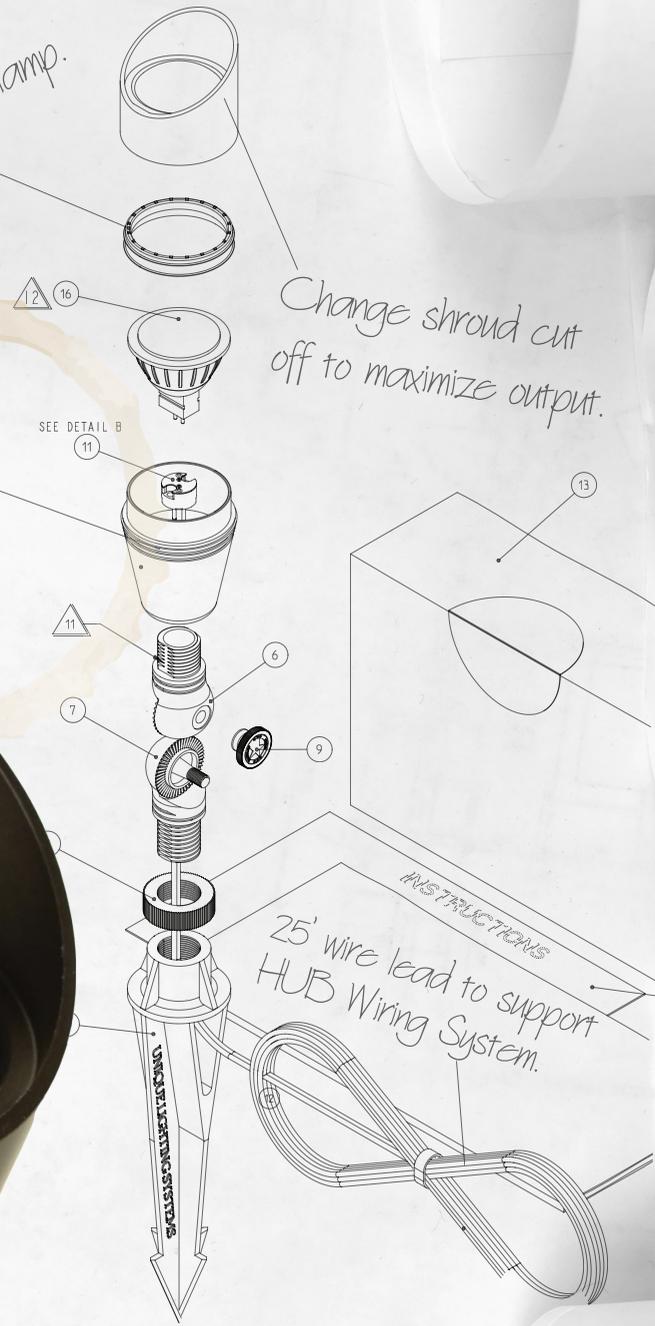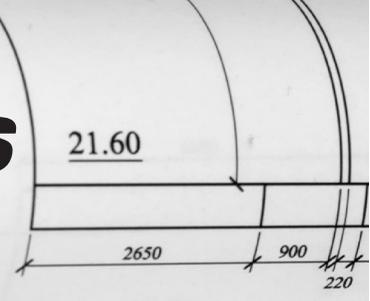

INSTRUCTIONS

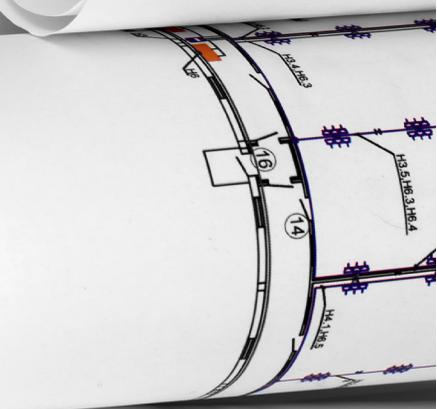

No
1
2
3
4
5
6
7


UNIQUE

LIGHTING SYSTEMS®



PRODUCT SPECIFICATIONS

PROJECT:	
MODEL #:	
LAMP(S):	
NOTES:	

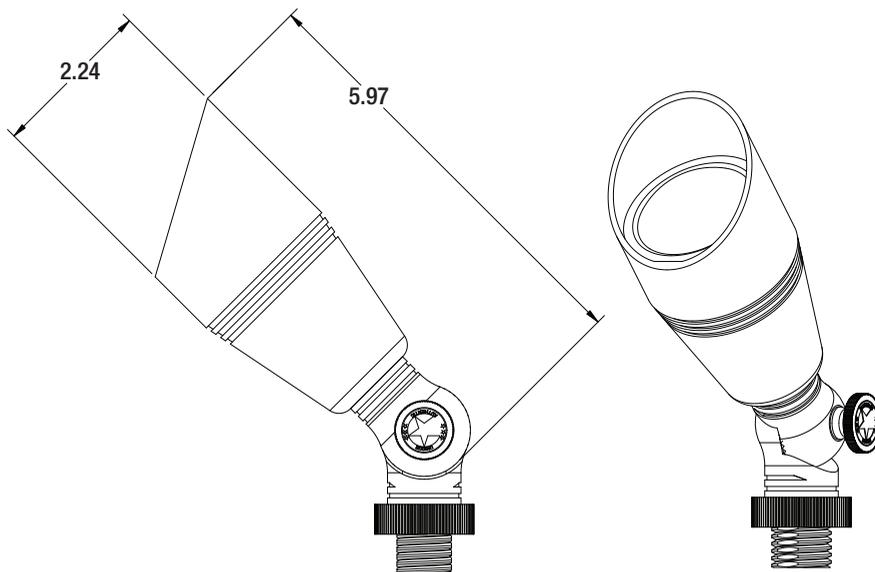

Specifications:

- CNC brass construction
- Machined brass thumb screw
- Specification grade, beryllium copper socket
- Premium grade direct burial cable
- AMC - Anti-Moisture Connections
- 8W max. LED lamp / 35W max. halogen
- Large Gravity mounting stake included
- Weathered brass finish standard
- Limited 15 year warranty

Light Distribution Cones:

LED-8W-CM6FL27K

	Illuminance at a Distance			
	Center Beam fc	Beam Width		
4.3ft	81.8 fc	3.0 ft	3.1 ft	
8.7ft	20.0 fc	6.2 ft	6.2 ft	
13.0ft	8.95 fc	9.2 ft	9.2 ft	
17.3ft	5.06 fc	12.3 ft	12.3 ft	
21.7ft	3.21 fc	15.4 ft	15.4 ft	
26.0ft	2.24 fc	18.4 ft	18.4 ft	

■ Vert. Spread: 39.0°
■ Horiz. Spread: 39.1°

LED-8W-CM6FL30K

	Illuminance at a Distance			
	Center Beam fc	Beam Width		
4.3ft	86.1 fc	3.0 ft	3.0 ft	
8.7ft	21.0 fc	6.1 ft	6.0 ft	
13.0ft	9.42 fc	9.1 ft	9.0 ft	
17.3ft	5.32 fc	12.1 ft	12.0 ft	
21.7ft	3.38 fc	15.2 ft	15.0 ft	
26.0ft	2.35 fc	18.2 ft	18.0 ft	

■ Vert. Spread: 38.5°
■ Horiz. Spread: 38.2°

NOTE: Maximum wattage shown, for all other wattage options please refer to uniquelighting.com/beamspreads.

Unique Lighting Systems® reserves the right to modify the design and/or construction of the fixture shown without notification.



UL 2108:2004 R12.07
CSA C22.2.9.0-96 (R2006)