



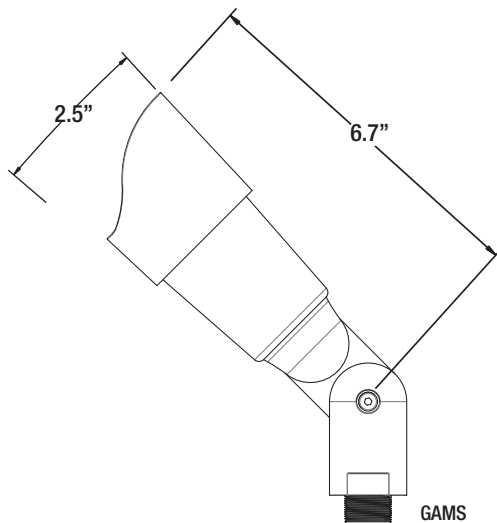

PRODUCT SPECIFICATIONS

PROJECT:	
MODEL #:	
LAMP(S):	
NOTES:	



Specifications:

- Marine grade A360 alloy construction
- High temperature silicone o-rings
- 1' FLEX™ Auxiliary wire lead
- 15' direct burial cable
- AMC - Anti-Moisture Connections
- Available in shrouded version only
- 8W max. LED lamp / 35W max. halogen
- Bronze finish
- E-Shield™ coating process
- Composite stake with brass threaded insert
- Limited 10 year warranty

Light Distribution Cones:

LED-8W-CM6FL27K

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
4.3ft	81.8 fc	3.0 ft	3.1 ft
8.7ft	20.0 fc	6.2 ft	6.2 ft
13.0ft	8.95 fc	9.2 ft	9.2 ft
17.3ft	5.06 fc	12.3 ft	12.3 ft
21.7ft	3.21 fc	15.4 ft	15.4 ft
26.0ft	2.24 fc	18.4 ft	18.4 ft

■ Vert. Spread: 39.0°
■ Horiz. Spread: 39.1°

LED-8W-CM6FL30K

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
4.3ft	86.1 fc	3.0 ft	3.0 ft
8.7ft	21.0 fc	6.1 ft	6.0 ft
13.0ft	9.42 fc	9.1 ft	9.0 ft
17.3ft	5.32 fc	12.1 ft	12.0 ft
21.7ft	3.38 fc	15.2 ft	15.0 ft
26.0ft	2.35 fc	18.2 ft	18.0 ft

■ Vert. Spread: 38.5°
■ Horiz. Spread: 38.2°



c us

UL 2108:2004 R12.07
CSA C22.2.9.0-96 (R2006)

Unique Lighting Systems® reserves the right to modify the design and/or construction of the fixture shown without further notification.

© Unique Lighting Systems® • 5825 Jasmine Street, Riverside, CA 92504 • Customer Service - 800.955.4831 • Order Services - 800.654.1882

www.uniquelighting.com



Fixtures

Part Number

GAMS-NL-BK
GAMS-NL-BZ
GAMS-NL-TT
GAMS-L427-BK
GAMS-L427-BZ
GAMS-L427-TT

Description

GAMMA RAY, SHROUD, ALLOY, NL, BZ
GAMMA RAY, SHROUD, ALLOY, NL, BK
GAMMA RAY, SHROUD, ALLOY, NL, TT
GAMMA RAY, SHROUD, ALLOY, LED, 4W, 27K, BK
GAMMA RAY, SHROUD, ALLOY, LED, 4W, 27K, BZ
GAMMA RAY, SHROUD, ALLOY, LED, 4W, 27K, TT

Accessories

Part Number

PART-BZ

Description

Particle Dome Mounting Base

Finishes

Standard Finish

BZ - Bronze
BK - Black
TT - Tucson Tan