


ANTI WAVE POOL PRODUCTS

“FORERUNNER” 4.75" LANE Specifications Sheet

LANE SPECIFICATIONS:


Each lane comprises a number of discs (injection molded in durable polyethylene, with additives for maximum UV and chemical resistance) threaded onto a 2000# test strength 20-strand stainless steel cable. Interspersed between the discs, seated into the recesses provided, are ovoid blow-molded floats. One end of the cable is secured by means of copper sleeves to form a loop holding a stainless steel eyelet, into which is fitted a stainless steel S-hook. The opposing end of the lane is fitted with the unique Supertensioner™, a turnbuckle tensioning device.

The body, lock nut and cap of the Supertensioner™ are injection molded of a specially compounded polypropylene while the other components are stainless steel (internal threaded rod, hook, lock nut bushing) and naval bronze (molded body bushing). The cable is restrained by a stainless steel clamp assembly, which locates inside the cap. The lane is supplied fully assembled; there may need to be some slight adjustment of the Supertensioner™ location, for which a full set of instructions is included.




Four fins on both sides of the disc extend fully to engage with adjacent fins, thereby creating a solid wave-retention barrier. No water gets through.

The undulating shape of the outer rim causes the wave to be deflected downward, thus leaving no wake on either side.

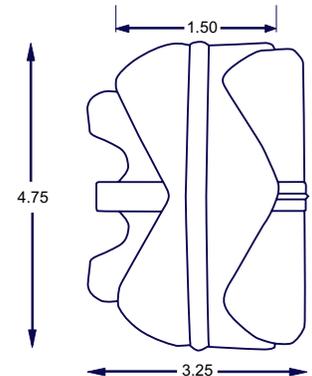


STANDARD COLORS ARE:

Red, White, Royal Blue, Yellow, Green, Black, Grey, Navy Blue, Teal, Orange, Maroon and Purple.



Internal ribs and walls are designed to optimize the impact-reducing capabilities of the disc, while keeping weight to the requisite level.

“FORERUNNER” 4.75" INCH LANE STRINGING PATTERNS

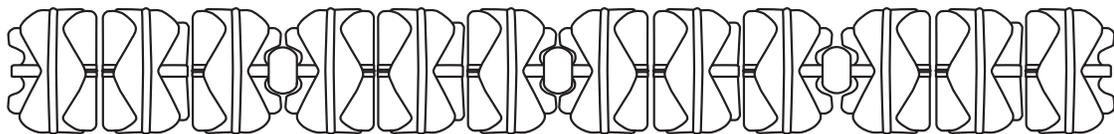

60 ft lane: STR - (1 x 54) + (2 x 10) + (7 x 9) + (2 x 10) + (1 x 54) + Hook
15 foot solid color lead-ins are followed by alternating colored sections.

75 ft lane: STR - (1 x 54) + (2 x 10) + (13 x 9) + (2 x 10) + (1 x 54) + Hook
15 foot solid color lead-ins are followed by alternating colored sections.
15 meter backstroke markers are available upon request.

25 m lane: STR - (1 x 55) + (15 x 12) + (1 x 55) + Hook
5 meter solid color lead-ins are followed by alternating colored sections.
15 meter backstroke markers are available upon request.

50 m lane: STR - (1 x 55) + (15 x 12) + (9 x 13) + (15 x 12) + (1 x 55) + Hook
5 meter solid color lead-ins are followed by alternating colored sections.
15 meter backstroke markers are available upon request.

All AntiWave products are supported by a 3-year warranty



ANTI WAVE POOL PRODUCTS “Simply the Best”

1144 Northwest 53rd Street, Seattle, WA 98107

Tel: 206.676.8209 Fax: 206.784.9708 www.antiwave.com

